Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

C57.13.5™

IEEE Standard for Performance and Test Requirements for Instrument Transformers of a Nominal System Voltage of 115 kV and Above

Power & Energy Society

Sponsored by the
Transformers Committee

IEEE
3 Park Avenue
New York, NY 10016-5997, USA

30 December 2009

IEEE Std C57.13.5™-2009
(Revision of
IEEE Std C57.13.5-2003)

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

IEEE Std C57.13.5™-2009
(Revision of
IEEE Std C57.13.5-2003)

IEEE Standard for Performance and Test Requirements for Instrument Transformers of a Nominal System Voltage of 115 kV and Above

Sponsor

Transformers Committee
of the
IEEE Power & Energy Society

Approved 11 September 2009

IEEE-SA Standards Board

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Abstract: Single-phase instrument transformers of a nominal system voltage of 115 kV and above with capacitive insulation system for line-to-ground connection and for both indoor and outdoor application is discussed in this standard. This standard is intended for use as a supplement to IEEE Std C57.13™-2008 and as a basis for performance and safety of equipment. It also describes test sequences, criteria, methods, and documentation for the test.

Keywords: design test, high-voltage, instrument transformers, routine tests, special tests, test criteria, test method, test requirements, test sequence

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2009 by the Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 30 December 2009. Printed in the United States of America.

IEEE is a registered trademark in the U.S. Patent & Trademark Office, owned by the Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-0-7381-6086-3 STD95981
Print: ISBN 978-0-7381-6087-0 STDPD95981

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

Use of an IEEE Standard is wholly voluntary. The IEEE disclaims liability for any personal injury, property or other damage, of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, or reliance upon this, or any other IEEE Standard document.

The IEEE does not warrant or represent the accuracy or content of the material contained herein, and expressly disclaims any express or implied warranty, including any implied warranty of merchantability or fitness for a specific purpose, or that the use of the material contained herein is free from patent infringement. IEEE Standards documents are supplied "**AS IS**."

The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation, or every ten years for stabilization. When a document is more than five years old and has not been reaffirmed, or more than ten years old and has not been stabilized, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

In publishing and making this document available, the IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity. Nor is the IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing this, and any other IEEE Standards document, should rely upon his or her independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration. A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered the official position of IEEE or any of its committees and shall not be considered to be, nor be relied upon as, a formal interpretation of the IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position, explanation, or interpretation of the IEEE.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Recommendations to change the status of a stabilized standard should include a rationale as to why a revision or withdrawal is required. Comments and recommendations on standards, and requests for interpretations should be addressed to:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854
USA

Authorization to photocopy portions of any individual standard for internal or personal use is granted by The Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Introduction

This introduction is not part of IEEE Std C57.13.5-2009, IEEE Standard for Performance and Test Requirements for Instrument Transformers of a Nominal System Voltage of 115 kV and Above.

The mission of the IEEE PC57.13.5 Working Group is to develop a comprehensive set of performance and test requirements for instrument transformers of a nominal system voltage of 115 kV and above. The objective is to improve the performance and safety of the instrument transformers in response to the concern indicated in the publication EPRI Workshop on Failed High Voltage Instrument Transformers, held in September 1990.

The first edition was published in 2003.

The main changes introduced in this revision are:

- Update of references
- Addition of temperature rise limits of terminals
- Additional requirements concerning the use of non-corrosive oil
- Revision of mechanical requirements
- Addition of a new annex related to current transformers used for the detection of unbalance current of capacitor banks
- Addition of a new annex related to current transformers having transient performance requirements
- Addition of a new informative annex giving additional information regarding the Electrical endurance test

Suggestions for improvement gained in the use of this standard will be welcome. They should be sent to the IEEE Standards Department.

Notice to users

Laws and regulations

Users of these documents should consult all applicable laws and regulations. Compliance with the provisions of this standard does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

This document is copyrighted by the IEEE. It is made available for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making this document available for use and adoption by public authorities and private users, the IEEE does not waive any rights in copyright to this document.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Updating of IEEE documents

Users of IEEE standards should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect. In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE Standards Association web site at http://ieeexplore.ieee.org/xpl/standards.jsp, or contact the IEEE at the address listed previously.

For more information about the IEEE Standards Association or the IEEE standards development process, visit the IEEE-SA web site at http://standards.ieee.org.

Errata

Errata, if any, for this and all other standards can be accessed at the following URL: http://standards.ieee.org/reading/ieee/updates/errata/index.html. Users are encouraged to check this URL for errata periodically.

Interpretations

Current interpretations can be accessed at the following URL: http://standards.ieee.org/reading/ieee/interp/index.html.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

At the time this standard was submitted for sponsor ballot, the IEEE PC 57.13.5 Working Group had the following membership:

Ross McTaggart , *Co-Chair*
Pierre Riffon, *Co-Chair*

Peter Balma
Fred Elliott
Joao Fernandes
Marcel Fortin
Eduardo Garcia
Vicente Garcia-Colon
Antony Jonnatti
Vladimir M. Khalin
Christopher Ten Haagen
Joe Ma
Bruce Magruder
Paul Millward
Thomas Nelson
James E. Smith
Loren B. Wagenaar
Peter Zhao

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

William J. Ackerman
Steven Alexanderson
Gary Arntson
Ali Al Awazi
Radoslav Barac
G. Bartok
David Bassett
Philip Beaumont
Kenneth Behrendt
Gabriel Benmouyal
Steven Bezner
Wallace Binder
Kenneth Birt
Oscar Bolado
Chris Brooks
Gustavo Brunello
John Burger
William Byrd
Hyder Do Carmo
Arvind K. Chaudhary
He Chun
Stephen Conrad
James Cornelison
Luis Coronado
Randall Crellin
Kevin Donahoe
Gary L. Donner
Michael Dood
Randall Dotson
Neal Dowling
Donald Dunn
Ahmed Elneweihi
Gary Engmann
Dominick Fontana
Fredric Friend
Jeffrey Gilbert
Jalal Gohari
James Graham
Stephen Grier
Randall Groves
Ajit Gwal
R. Haas
Jeffrey Hauber
Roger Hedding
Hamidreza Heidarisafa
Charles Henville
Jerry Hohn
David Horvath
James Huddleston, III
Gerald Johnson
James Jones
Bogdan Kasztenny
Tanuj Khandelwal
Yuri Khersonsky
James Kinney
Joseph L. Koepfinger
Boris Kogan
Ljubomir Kojovic
David W. Krause
Jim Kulchisky
Saumen Kundu
Chung-Yiu Lam
Raluca Lascu
Albert Livshitz
Federico Lopez
G. Luri
Bruce Mackie
Vahid Madani
Omar Mazzoni
Walter Mccannon
Michael Mcdonald
David Mcginn
Gary Michel
Wade Midkiff
Dean Miller
Brian Mugalian
Randolph Mullikin
Jerry Murphy
Pratap Mysore
Bradley Nelson
Rhonda Netzel
Michael S. Newman
Joe Nims
Gary Nissen
James M. O'Brien
Alexandre Parisot
Russell Patterson
Robert Pettigrew
Bruce Pickett
Ryland Revelle
Michael Roberts
Charles Rogers
Steven Sano
Bartien Sayogo
Thomas Schossig
Gregory Sessler
Donald Sevcik
Lubomir Sevov
Gil Shultz
Tarlochan Sidhu
Veselin Skendzic
Douglas Smith
James E. Smith
Jerry Smith
Kevin Stephan
Gary Stoedter
Allan St Peter
Richard Taylor
John Tengdin
Damien Tholomier
Michael Thompson
Demetrios Tziouvaras
Joe Uchiyama
Eric Udren
John Vergis
Ilia Voloh
Jialong Wang
D. Weers
Roger Whittaker
Thomas Wiedman
Richard Young
Luis Zambrano
Karl Zimmerman

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

When the IEEE-SA Standards Board approved this standard on 11 September 2009, it had the following membership:

Robert M. Grow, *Chair*
Thomas Prevost, *Vice Chair*
Steve M. Mills, *Past Chair*
Judith Gorman, *Secretary*

John Barr
Karen Bartleson
Victor Berman
Ted Burse
Richard DeBlasio
Andy Drozd
Mark Epstein
Alexander Gelman
Jim Hughes
Richard H. Hulett
Young Kyun Kim
Joseph L. Koepfinger*
John Kulick
David J. Law
Ted Olsen
Glenn Parsons
Ronald C. Petersen
Narayanan Ramachandran
Jon Walter Rosdahl
Sam Sciacca

*Member Emeritus

Also included are the following nonvoting IEEE-SA Standards Board liaisons:

Howard L. Wolfman, *TAB Representative*
Michael Janezic, *NIST Representative*
Satish K. Aggarwal, *NRC Representative*

Michelle Turner
IEEE Standards Program Manager, Document Development

Matthew Ceglia
IEEE Standards Program Manager, Technical Program Development

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Contents

1. Overview 1
1.1 Scope 1
1.1 Purpose 1

2. Normative references 2

3. Definitions 2

4. General 3
4.1 Insulation requirements 3
4.2 Mineral oil requirements 8
4.3 Requirements for accuracy and accuracy calibration systems 8
4.4 Mechanical performance requirements 9
4.5 Thermal performance requirements 11
4.6 Ground shield requirements 11
4.7 Dissolved gas and water content requirements for new oil-immersed transformers 11
4.8 Endurance capability for fast high voltage transient 12
4.9 Performance of internal arc protection 12
4.10 Identification of test sample in the type test report 12
4.11 Secondary short-circuit capability for voltage transformers 12

5. Test conditions 12

6. Classification of test 13
6.1 Routine tests and test sequences 13
6.2 Type tests and test sequences 16
6.3 Special tests 19

7. Routine test procedures (applicable to instrument transformers) 19
7.1 Verification of terminal markings and polarity 19
7.2 Capacitance and dissipation factor test 19
7.3 Applied voltage test on secondary windings 20
7.4 Insulation resistance test on windings 20
7.5 Lightning impulse voltage test on the primary winding 20
7.6 Power frequency voltage withstand test 21
7.7 Partial discharge test 21
7.8 Dissolved gas and water content analysis for oil-immersed transformers (of a nominal system voltage of 345 kV and above) 22
7.9 Sealing test 22
7.10 Ground shield check 23
7.11 Tests on the mineral oil 23

8. Routine test procedures (applicable to current transformers) 23
8.1 Inter-turn over-voltage test 23
8.2 Accuracy test for the metering rated current transformers 24
8.3 Resistance measurement of relaying rated secondary windings 25
8.4 Performance characteristics of relaying rated current transformers 25

9. Routine test procedures (applicable to voltage transformers) 26
9.1 Applied voltage test on the neutral terminal 26
9.2 Accuracy test 26

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

9.3 Excitation characteristics with respect to rated voltage factor 26
9.4 Resistance measurement of windings 27

10. Type test procedures (applicable to instrument transformers) 27
10.1 Dissolved gas and water content anaylsis 27
10.2 Mechanical test 27
10.3 Lightning impulse voltage test on the primary winding 28
10.4 Switching impulse voltage test on the primary winding—wet 29
10.5 External radio influence voltage (RIV) test 29
10.6 Power frequency voltage withstand test —wet 30
10.7 Power frequency voltage withstand and partial discharge test—dry 30
10.8 Temperature rise test 31
10.9 Short-time mechanical and thermal rating test 32
10.10 Accuracy performance test 34
10.11 Creepage distance measurement 34
10.12 Sealing system test for gas-filled instrument transformers 35

11. Type test procedure (applicable to current transformers) 35
11.1 Secondary open-circuit voltage withstand test 35

12. Special test procedures 36
12.1 Endurance chopped wave test 36
12.2 Internal arc test 36
12.3 Seismic qualification 37

13. Identification of test sample in the type test report 38
13.1 Document package related to transformer type 38
13.2 Requirements of the document package 38

Annex A (normative) Test code 40

Annex B (informative) Dielectric test performed at an altitude of 1000 m or less for instrument transformers designed for installation at altitudes greater than 1000 m 44

Annex C (informative) Dielectric tests, oil sampling, and other related measurements in the field 46

Annex D (informative) Internal arc protection for instrument transformers 47

Annex E (normative) Validity of type test reports and guidance for reviewing the design comparison report for the modified design 48

Annex F (informative) Rated voltage factor 50

Annex G (normative) Current transformers used for the detection of unbalance current of capacitor banks 51

Annex H (informative) Current transformers having transient performance requirements 67

Annex I (informative) Electrical endurance test, explanatory note 68

Annex J (informative) Bibliography 69

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

IEEE Standard for Performance and Test Requirements for Instrument Transformers of a Nominal System Voltage of 115 kV and Above

IMPORTANT NOTICE: This standard is not intended to ensure safety, security, health, or environmental protection in all circumstances. Implementers of the standard are responsible for determining appropriate safety, security, environmental, and health practices or regulatory requirements.

This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading "Important Notice" or "Important Notices and Disclaimers Concerning IEEE Documents." They can also be obtained on request from IEEE or viewed at http://standards.ieee.org/IPR/disclaimers.html

1. Overview

1.1 Scope

This standard applies to single-phase instrument transformers of a nominal system voltage of 115 kV and above with capacitive insulation system for line-to-ground connection and for both indoor and outdoor application.

This standard is intended for use as a supplement to IEEE Std C57.13™-2008[1] and as a basis for performance and safety of equipment. It also describes test sequences, criteria, methods and documentation for the test.

1.1 Purpose

The purpose of this standard is to supplement the IEEE Std C57.13-2008, with specific requirements to single-phase instrument transformers of a nominal system voltage of 115 kV and above, with capacitive insulation system for line-to-ground connection and for both indoor and outdoor applications.

[1] Information on reference can be found in Clause 2.

Copyright © 2009 IEEE. All rights reserved.

2. Normative references

The following referenced documents are indispensable for the application of this document (i.e., they must be understood and used, so each referenced document is cited in text and its relationship to this document is explained). For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments or corrigenda) applies.

ASTM D1275-06, Standard Test Method for Corrosive Sulfur in Electrical Insulating Oils.[2]

IEC 60270: 2000, High-Voltage Test Techniques— Partial discharge measurements.[3]

IEEE Std 4™-1995, IEEE Standard Techniques for High Voltage Testing.[4]

IEEE Std 693™-2005, IEEE Recommended Practices for Seismic Design for Substations.

IEEE Std C57.13-2008, IEEE Standard Requirements for Instrument Transformers.

IEEE Std C57.19.01™-2000, IEEE Standard Performance Characteristics and Dimensions for Outdoor Apparatus Bushings.

IEEE Std C57.106™-2006, IEEE Guide for Acceptance and Maintenance of Insulating Oil in Equipment.

IEEE Std C62.11™-2005, IEEE Standard for Metal-Oxide Surge Arresters for AC Power circuits (>1 kV).

NEMA Standards Publication No 107-1987, Methods of Measurement of Radio Influence Voltage (RIV) of High Voltage Apparatus.[5]

3. Definitions

For the purposes of this document, the following terms and definitions apply. *The IEEE Standards Dictionary: Glossary of Terms & Definitions* should be referenced for terms not defined in this clause.[6]

capacitive insulation system: An arrangement of internal insulation and electrodes to distribute both the alternating and impulse voltages along the bushing of the instrument transformer with capacitive dielectric layers and/or electrode(s) to achieve an improved co-ordination between the internal and external insulation for the purpose of increasing the over-voltage withstand capability.

Internal arc protection class I: A special transformer design with a feature that, during an internal line-to-ground arc test with the arc taking place at a location, which is technically the most probable, the debris of the transformer will be confined to a circle, centered at the transformer. The diameter of this circle is equal to the sum of twice the height of the transformer and the diameter of the transformer.

Internal arc protection class II: A special transformer design with a feature that, during an internal line-to-ground arc test with the arc taking place at a location, which is technically the most probable, will not fracture the insulator or housing of the transformer.

[2] ASTM publications are available from the ASTM Customer Services, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA, 19428-2959 USA, (http://www.astm.org/).
[3] IEC publications are available from the Sales Department of the International Electrotechnical Commission, Case Postale 131, 3 rue de Varembe, CH-1211, Geneve 20, Switzerland/Suisse, (http://www.iec.ch/).
[4] IEEE publications are available from the Sales Department, the Institute of Electrical and Electronics Engineers, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331, USA (http://standards.ieee.org/).
[5] NEMA publications are available from the Sales Department, National Electrical Manufacturers Association, 1300 North 17th Street, Suite 1847, Rosslyn, VA, 22209, USA, (http://www.nema.org/).
[6] *The IEEE Standards Dictionary: Glossary of Terms & Definitions* is available at http://shop.ieee.org/.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

NOTE—The above definitions Internal arc protection class I and Internal arc protection Class II regarding the classification of internal arc protection apply only to the test conditions specified in this standard. The instrument transformers may have different performance during an in-service internal arc fault. Refer to Annex D for more information regarding the interpretation of internal arc protection. The performance does not apply to any internal pressure relief device (e.g., rupture disc) provided with the transformers.[7]

prescribed extinction voltage: The lowest line-to-ground voltage required for the transformer at which the partial discharge is determined to exist if the reference intensity is met when the voltage applied to the transformer is gradually decreased without interruption from the power frequency withstand voltage or pre-stress voltage value during the partial discharge test. The reference partial discharge intensity for the transformers covered in this standard is 10 pC.

rated voltage factor: A multiplier applied to the rated (primary) voltage to derive the maximum voltage at which a transformer must comply with the relevant requirements for a specified time and with the relevant accuracy requirements.

NOTE—Refer to Annex F for additional information.

terminals: Conductive element belonging to the instrument transformer provided for connecting that instrument transformer to one or more external conductors. Terminals are normally connected to one or more conductors by means of connectors that are generally not considered to be part of the instrument transformer itself.

thermal current rating factor: A multiplier applied to the rated primary and secondary current to derive the maximum current that can be carried continuously without exceeding either the limiting temperature rises or the accuracy class limitation.

4. General

For the performance and safety, the instrument transformers shall comply with IEEE Std C57.13-2008, supplemented with the requirements provided in this clause. If any conflicts or inconsistencies exist between IEEE Std C57.13-2008 and this standard, the clauses in this standard shall take precedence.

4.1 Insulation requirements

4.1.1 Voltage ratings, dielectric test levels, and prescribed extinction voltages

The voltage ratings, dielectric test levels, and prescribed extinction voltages for instrument transformers are given in Table 1.

NOTE 1—For nominal system voltage 230 kV, 345 kV, and 500 kV, a good service experiences with instrument transformers of reduction insulation levels have been reported. The users should review their own records and decide accordingly. This standard recommends the use of the standard insulation voltage levels which are higher values for each system voltage.

NOTE 2—The dielectric levels and prescribed extinction voltages are applicable to instrument transformers used in grounded or effectively grounded neutral systems.

[7] Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Table 1— Voltage ratings, dielectric test levels, and prescribed extinction voltages

Nominal system voltage (rms) (line-to-line)	Maximum system voltage (rms) (line-to-line)	Lightning impulse voltage (peak)		Switching impulse voltage (peak)	Power frequency withstand voltage[b] (rms) (line-to-ground)		Prescribed extinction voltage[c] (rms) (line-to-ground)
		Full wave	Chopped wave[a]		[Dry]	[Wet]	
kV	kV	kV	kV	kV	kV	kV	kV
115	121	550	630	—	230	230	121
138	145	650	750	—	275	275	145
161	169	750	860	—	325	325	169
230	242	950	1090	—	395	395	242
		1050	1210	—	460	460	
345	362	1175	1350	950	510	—	362
		1300	1500	975	575	—	
500	550	1550	1785	1175	680	—	550
		1800	2070	1300	830	—	
765	800	2100	2420	1550	975	—	800

[a]The minimum time to chopping shall be 3 μs.
[b]The duration for the power frequency voltage withstand test shall be in accordance with 4.1.8 for both dry and wet test conditions.
[c]The definition is provided in Clause 3. The reference partial discharge intensity for the instrument transformers is 10 pC and shall be measured in accordance with IEC 60270 (2000-12).

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

4.1.2 Capacitance and dissipation factor requirements

The capacitance and dissipation factor of the transformer shall be measured at power frequency at the following test voltages:

— 10 kV (rms)[8]

— Maximum rated voltage

The test shall be performed before and after the dielectric tests. The increase of capacitance measured after compared with that measured before the dielectric tests shall be less than the value produced by the breakdown of one capacitive element.

The dissipation factor shall be in accordance with the following requirements.

a) For oil-immersed transformers

1) The dissipation factor shall be 0.5% maximum at a reference ambient temperature of 20 °C

2) The absolute increase of the dissipation factor value measured after compared with the value measured before the dielectric tests shall be less than 0.1%

b) For gas-filled transformers[9]

1) The dissipation factor shall be 0.15% maximum at a reference ambient temperature of 20 °C

2) The absolute increase of the dissipation factor value measured after compared with the value measured before the dielectric tests shall be less than 0.03%

4.1.3 Creepage distance requirements

The ratio of minimum creepage distance on the external surface of the porcelain insulator to the nominal line-to-ground voltage shall be in accordance with IEEE Std C57.19.01-2000. The ratios for light and heavy pollution levels shall be 28 mm/kV and 44 mm/kV respectively. Table 2 provides minimum creepage distances as a function of nominal system voltage and level of pollution.

[8] The measurement at 10 kV is optional as the values are useful as a reference for commissioning.

[9] As the inherent capacitance of gas-filled instrument transformers is very low (in the range of 100–300 pF), the laboratory should take the necessary precautions to reduce the stray effects of the neighboring equipment on the capacitance measurement, and also the effects of the leakage current over the insulator surface on the dissipation factor measurement.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Table 2—Creepage distance

Nominal system voltage (rms) kV	Maximum system voltage (rms) kV	Minimum creepage distance mm	
		(Light pollution)	(Heavy pollution)
115	121	1860	2920
138	145	2235	3510
161	169	2605	4090
230	242	3720	5845
345	362	5580	8765
500	550	8085	12 705
765	800	12 370	19 435

NOTE 1—The definitions of light and heavy pollution levels are provided in IEEE Std C57.19.00™-1995 [B17]. For medium and extra heavy pollution levels, additional information regarding creepage distances can also be found in IEEE Std C57.100™-1995.

NOTE 2—The creepage distance for composite insulator with silicone rubber sheds has not been established. This standard recommends the use of the same creepage distance as that for the porcelain insulator.

4.1.4 External radio influence voltage (RIV) requirements

The maximum external radio influence voltage (RIV) of the instrument transformer shall be in accordance with Table 3 when the test voltage is applied to the primary terminal. The transformer shall be assembled as in service for the test. Any external electrodes, if not part of the transformer, shall not be used for the test.

Table 3—External radio influence voltage (RIV)

Nominal system voltage (line-to-line) (rms) kV	Maximum system voltage (line-to-line) (rms) kV	Radio influence test voltage (line-to-ground) (rms) kV	Maximum radio influence voltage[10] μV
115	121	71	200
138	145	84	200
161	169	98	200
230	242	142	250
345	362	209	250
500	550	303	350
765	800	462	500

[10] The background noise level shall not be higher than half the maximum RIV.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

4.1.5 Routine partial discharge test

The partial discharge intensity measured at the voltage corresponding to the prescribed extinction voltage level as provided in Table 4 shall be less than or equal to the reference intensity of 10 pC. The measuring method shall be in accordance with IEC 60270: 2000.

The partial discharge test shall be carried out subsequent[11] to the power frequency voltage withstand test as described in 7.7.

The transformer shall withstand, for an appropriate duration in accordance with 4.1.8, the pre-stress voltage provided in Table 4 before the partial discharge is measured.

Table 4—Routine partial discharge tests voltage

Nominal system voltage (rms) (line-to-line) kV	Maximum system voltage (rms) (line-to-line) kV	Pre-stress voltage (rms) (line-to-ground) kV	Prescribed extinction voltage (rms) (line-to-ground) kV
115	121	185	121
138	145	220	145
161	169	260	169
230	242	315[a]	242
		370	
345	362	410[a]	300[b]
		460	
500	550	545[a]	435[b]
		665	
765	800	780	665[b]

[a]The values shown are for the reduced insulation levels in reference to Table 1.

[b]The standard recognizes the difficulties of partial discharge measurement at these voltage levels in the industrial environments with high level of background noise. The problem is aggravated if the test laboratories are undersized. Sometimes extra-high-voltage test services with specialized capabilities are required. For the transformers of these voltage ratings, therefore, the prescribed extinction voltages are reduced to 1.5 times the rated voltages in order to allow the test to be performed in manufacturers' laboratories. The reduced voltage levels are considered still acceptable since the ground fault factor for a system with a grounded or effectively grounded neutral does not exceed 1.4.

4.1.6 Insulation resistance requirements

The insulation resistances between individual winding and ground and between windings shall be measured at a voltage not less than 1.0 kV (dc). The values shall not be less than 200 MΩ.

[11] An exception case is under the situation of repeating the partial discharge test after the sealing test during which dry air is in contact with the oil of the transformer.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

4.1.7 Power frequency voltage withstand test

The power frequency withstand voltage shall be in accordance with the value provided in Table 1.

For current transformers, the voltage shall be applied to the primary winding.

For voltage transformers, the test voltage shall be either impressed between the primary and neutral terminals or induced from the secondary winding with the primary winding open-circuit. The neutral terminal shall be grounded during the test.

The voltage shall be maintained for 60 s. The time may be reduced in accordance with 4.1.8 if the frequency is higher than 120 Hz.

NOTE—This test can also be called induced voltage withstand test for voltage transformers.

4.1.8 Duration of power frequency voltage withstand test for test frequency higher than 120 Hz

If the test frequency of higher than 120 Hz is used for the power frequency voltage withstand test or for the pre-stress voltage for partial discharge measurement, the duration of the test may be reduced as shown in Equation (1).

$$Time\,(\mathrm{s}) = \frac{7200}{Test\ Frequency\,(\mathrm{Hz})} \tag{1}$$

The duration shall not be less than 18 s and the test frequency shall not be greater than 400 Hz.

4.2 Mineral oil requirements

The mineral oil used for oil-immersed instrument transformers shall be processed from the naphthenic base crude oil or its equivalent.[12] It shall be in accordance with 4.2 of IEEE Std C57.106-2006. The characteristics of the new processed oil shall be in accordance with 4.3 and 4.4 of IEEE Std C57.106-2006.

In addition it shall be demonstrated the oil is non corrosive in accordance with the extended ASTM D1275 Method B test.

For the extreme cold climate, the manufacturers and users have to agree on the mineral oil specification.

4.3 Requirements for accuracy and accuracy calibration systems

The accuracy performance shall be in accordance with the requirements of IEEE Std C57.13-2008.

Accuracy performance for all transformers shall be determined using calibration techniques and methods having an inherent accuracy of at least 4 times better than the maximum guarantied accuracy for the ratio and ±2 minutes for phase angle.

The test burdens shall be in accordance with Table 9 and Table 15 of IEEE Std C57.13-2008 for current transformers and voltage transformers respectively.

[12] New insulating oil processed with the latest technology may be commercially available from the refinery. The user should check with the manufacturer for more information.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

The equipment used for accuracy tests shall be traceable to the national standards. Records of accuracy verification for the calibration systems by an independent laboratory shall be regularly maintained.

The maximum interval shall be five years for non-electronic equipment and one year for electronic devices, unless specified otherwise by the measuring equipment manufacturer.

4.4 Mechanical performance requirements

All instrument transformers shall comply with the following mechanical performance requirements described in 4.4.1 and 4.4.2.

4.4.1 Sealing tests

All instrument transformers shall be sealed against leakage of insulating fluid for the normal service conditions stated in IEEE Std C57.13-2008.

4.4.1.1 Oil-immersed instrument transformers

The manufacturers shall review the typical examples sealing tests outlined in Table 5 and adopt the one most suitable for their transformers. Other test methods could also be fully acceptable.

Table 5—Typical examples of sealing test for oil-immersed instrument transformers

Test	Average oil temperature °C	Internal pressure kPa	Time h
(I)	50	35	24
(II)	50	103	12
(III)[13]	85	0	12
(IV)	25	35	60
(V)	25	103	24

4.4.1.2 Gas-filled instrument transformers

The construction of the tank shall be in accordance with the national standards[14] on enclosures for gas-filled electrical equipment. The manufacturer shall submit the certificate of the tank to the user for approval before the routine tests.

The maximum leakage-rates of transformers designed for various ranges of ambient temperature shall be as follows:

[13] This standard recommends this procedure for transformers equipped with oil expansion diaphragms or bellows. Other procedures as shown in Table 5, with application of pressure, (e.g., by clamping the oil expansion diaphragms or bellows, instead of raising the average oil temperature of the transformer to 85 °C should also be considered acceptable).

[14] Additional informative documentation (Canadian and European Standards) about pressure vessels used in electrical equipment not containing corrosive gas such as oxygen and/or water are listed in Annex J.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

a) For average ambient temperature (20 °C): 0.5% / year

b) For low ambient temperature (T_L = –5, –10, –15 or –25 °C): 1.5% / year

c) For extra low ambient temperature (T_L = –40 °C): 3.0% / year

d) For ultra low ambient temperature (T_L = –50 °C): 6.0% / year

T_L is the lower limit of the ambient temperature range.

The manufacturer shall submit the routine sealing test procedure and acceptance criteria to the user for approval.

4.4.2 Mechanical strength of the transformer

All instrument transformers intended for pedestal mounting shall be capable of withstanding the following non-simultaneous mechanical stresses:

- Static terminal loads according to load values shown in Table 6
- Winds of 160 km/h
- Resulting mechanical stresses produced by an ice coating of 20 mm
- Horizontal seismic force resulting from a zero-period acceleration of 0.1 g as defined as low qualification level in IEEE Std 693-2005

All instrument transformers intended for suspension mounting shall be capable of withstanding a tension equal to 13 kN in addition to its own weight.

Table 6—Static terminal loads

Maximum system voltage (kV)	Static terminal load (N)	
	Voltage transformers	Current transformers
≤ 170	1000	2000
245 to 362	1250	2500
≥ 550	1500	4500

NOTE 1—The sum of loads acting in routinely operating conditions should not exceed 50% of the specified terminal load.

NOTE 2—In sum applications, instrument transformers with through current terminals, should withstand rarely occurring extreme dynamic load conditions such as short-circuits not exceeding 1.4 times the static terminal load.

NOTE 3—For some applications, it may be necessary to establish the resistance to rotation of the primary terminals. The moment to be applied during tests has to be agreed between the manufacturer and purchaser.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

4.5 Thermal performance requirements

The limits of observable temperature rise in instrument transformers when tested in accordance with their ratings shall be as given in Table 4 of IEEE Std C57.13-2008.

Terminals for use in air shall be designed so that their maximum operating temperature when tested with their ratings do not exceed the values provided in Table 7.

Table 7—Maximum operating temperature of power terminals intended for bolted connection in air

Performance	Bare copper or bare aluminum terminals	Tin-plated terminals	Silver-plated terminals
Maximum operating temperature (°C)	90	105	115

4.6 Ground shield requirements

The instrument transformers shall be provided with a ground shield between the primary winding and the secondary windings.

NOTE—The ground shield provides some degree of protection in the secondary circuit against an insulation failure between the primary and secondary windings.

4.7 Dissolved gas and water content requirements for new oil-immersed transformers

For new oil-immersed transformers, the maximum concentration of the dissolved gas and water content in the oil, after the test program, shall be in accordance with the values in Table 8.

The minimum sensitivity of gas spectrum analyzer shall be in accordance with the last column of Table 8.

Table 8—Dissolved gas and water content for new oil-immersed instrument transformers

Component		Maximum Concentration (p.p.m.)	Minimum Sensitivity (p.p.m.)
Hydrogen	H_2	15.0	3.0
Carbon monoxide	CO	40.0	5.0
Methane	CH_4	5.0	0.1
Ethane	C_2H_4	2.0	0.1
Ethylene	C_2H_6	3.0	0.1
Acetylene	C_2H_2	0.5[15]	0.1
Water	H_2O	10.0	3.0

NOTE—The values are in reference to Table A-1 of Annex A of IEC 61181: 2007 [B16] with the exception of the concentration for acetylene.

[15] An acceptable transformer is indicated with the absence of acetylene. However, this standard has made allowances for the residual acetylene present in the oil even after the oil processing.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

4.8 Endurance capability for fast high voltage transient

All instrument transformers of a nominal system voltage of 345 kV and above shall be suitably designed to endure the fast high voltage transient stress induced during the operation of the line disconnect switch located in its vicinity. For more information see Annex I.

NOTE—To verify the transformer design will comply with the requirement, the user should specify the endurance chopped wave test 12.1).

4.9 Performance of internal arc protection

The transformer design with the safety features of limiting hazardous effects of an internal arc shall conform, during the test, with the requirements defined for their classes as provided in Clause 3.

The special features of internal arc protection for instrument transformers shall be specified at the enquiry.

4.10 Identification of test sample in the type test report

For the purpose of traceability, the test sample used for the type tests shall be uniquely identified. Information related to the design and construction of the sample shall form part of the type test report.

4.11 Secondary short-circuit capability for voltage transformers

The voltage transformer shall be designed and constructed to have the following withstand capabilities:

a) With rated voltage maintained on the primary winding, each secondary winding including the tapped portion shall be capable of withstanding both the thermal and mechanical effects resulting from the secondary short circuit for duration of 1 s, and

b) The primary winding shall also be capable of withstanding both the thermal and mechanical effects resulting from the 1 s short circuit applied simultaneously to all secondary windings with rated voltage being maintained on the primary winding.

NOTE—Maximum temperature limits are given in 7.7 of IEEE Std C57.13-2008.

5. Test conditions

Unless specified otherwise for particular tests, the following test conditions shall apply:

a) The ambient temperature range for tests shall be from 0 °C through +40 °C with +20 °C as the reference temperature

b) The transformer shall be in new, clean, and dry conditions

c) The transformer shall be mounted in a vertical position on the floor or on a structure, the height of which shall be no greater than that of the structure used in service

d) For gas-filled instrument transformers, the gas pressure shall be set, for all electrical tests, unless otherwise stated, at the minimum value, which corresponds to the equivalent gas density at 20 °C for which the second alarm level is set

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

6. Classification of test

Tests listed in this standard are classified as routine,[16] type and special tests, which are necessary to ensure that the design and construction of the transformer are adequate to comply with the requirements of Clause 4 and IEEE Std C57.13-2008.

6.1 Routine tests and test sequences

6.1.1 Routine tests applicable to instrument transformers

The manufacturer shall perform the following routine tests on each instrument transformer:

a) Verification of terminal markings and polarity (see 7.1)
b) Capacitance and dissipation factor test (before and after the dielectric tests) (see 7.2)
c) Applied voltage test on secondary windings (see 7.3)
d) Insulation resistance test on windings (see 7.4)
e) Lightning impulse voltage test on the primary winding (see 7.5)
f) Power frequency voltage withstand test (see 7.6)
g) Partial discharge test (see 7.7)
h) Dissolved gas and water content analysis tests for oil-immersed transformers (of a nominal system voltage of 345 kV and above) (see 10.8)
i) Sealing test (see 7.9)
j) Ground shield check (see 7.10)
k) Tests on mineral oil (see 7.11)

6.1.2 Routine test applicable to current transformers

The manufacturer shall perform the following routine tests on each current transformer:

a) Inter-turn over-voltage test (see 8.1)
b) Accuracy test for metering rated current transformers (see 8.2)
c) Resistance measurement of relaying rated secondary windings (see 8.3)
d) Performance characteristics for relaying rated current transformers (see 8.4)

6.1.3 Routine test applicable to voltage transformers

The manufacturer shall perform the following routine tests on each voltage transformer:

a) Applied voltage test on the neutral terminal (see 9.1)
b) Accuracy test (see 9.2)
c) Excitation characteristics with respect to rated voltage factor (see 9.3)
d) Resistance measurement of windings (see 9.4)

[16] For reducing the routine test burden to the manufacturer, some tests are performed based on selected samples.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

6.1.3.1 Sequence of the routine tests

The routine test shall be performed in the sequence as outlined in Figure 1 and Figure 2.

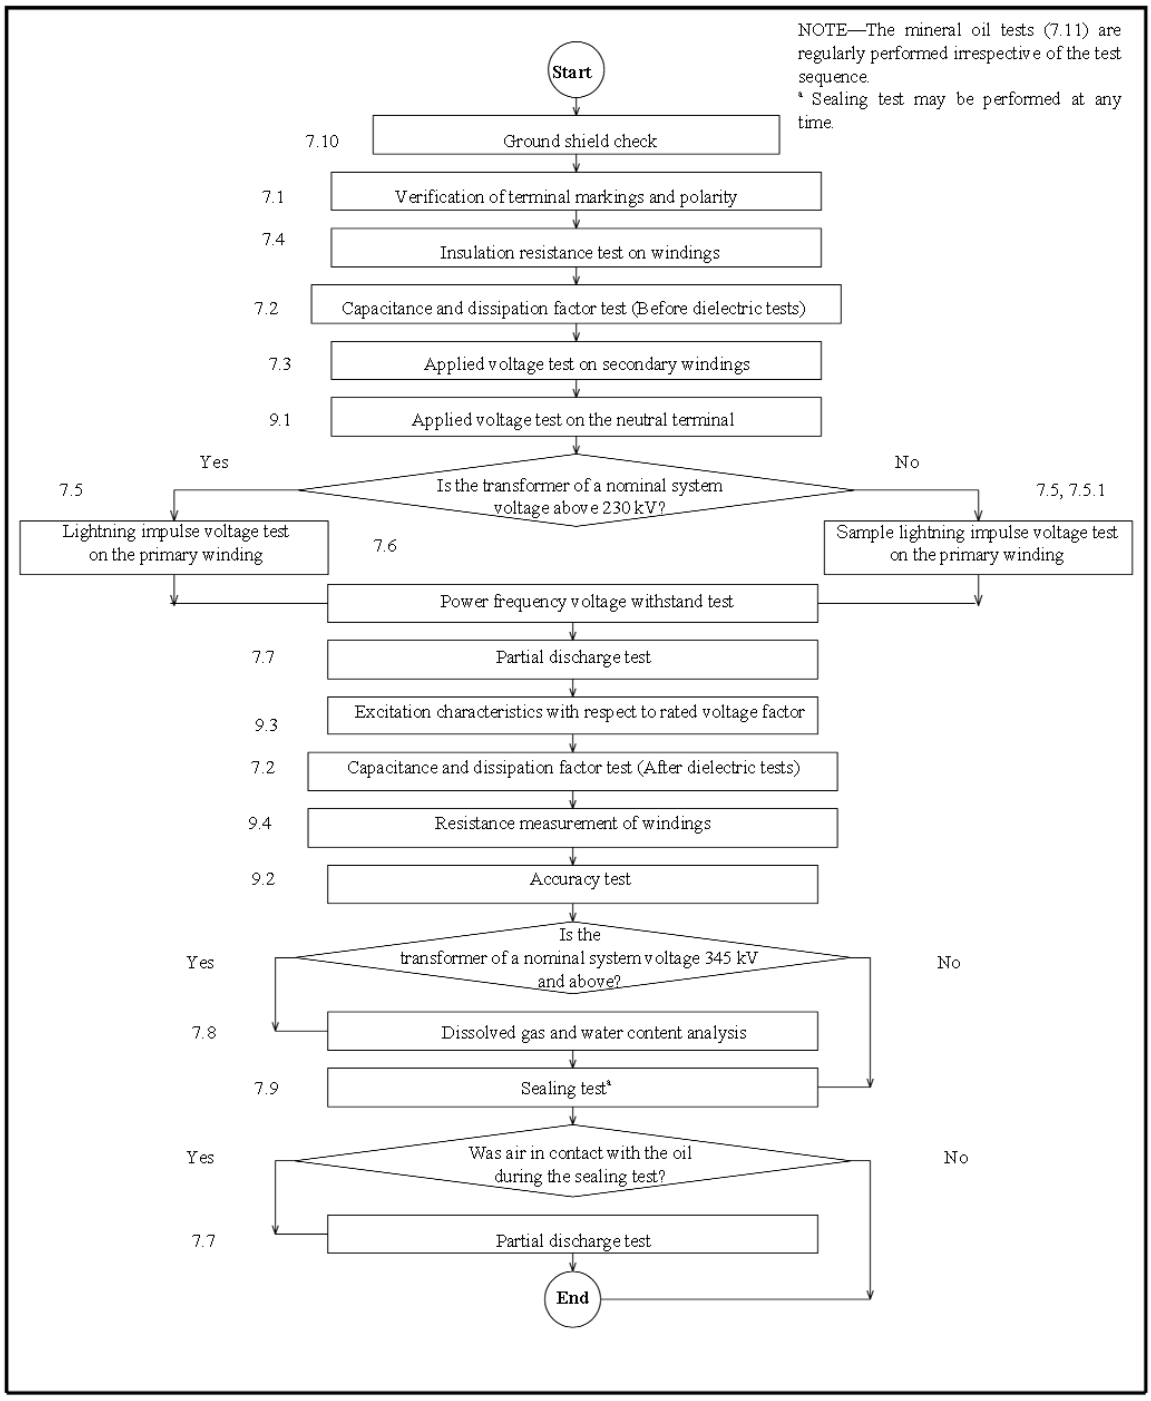


Figure 1—Flowchart of routine tests on voltage transformers[17]

[17] The numbers next to the boxes are the pertinent clause references.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

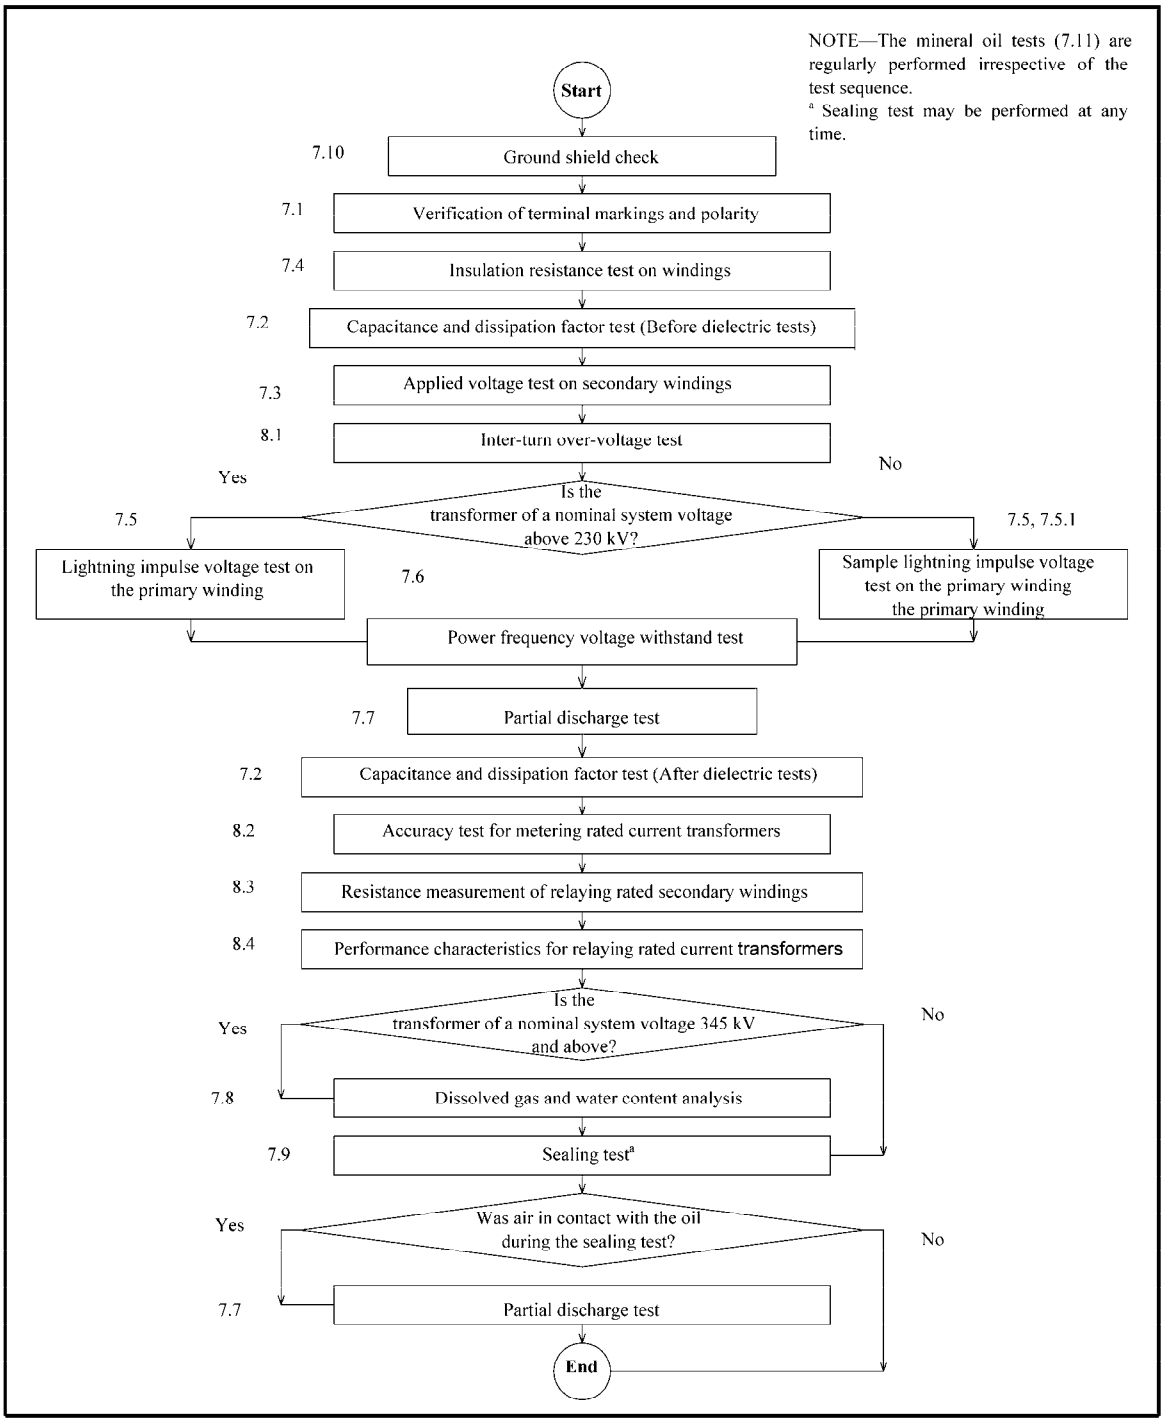


Figure 2—Flowchart of routine test on current transformers

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

6.2 Type tests and test sequences

Type tests are intended to verify whether the characteristics and performance of the instrument transformer design comply with the requirements of Clause 4 and IEEE Std C57.13-2008.

6.2.1 Type tests applicable to instrument transformers

The manufacturer shall perform the following type tests on each instrument transformer design:

a) Dissolved gas and water content analysis (see 10.1)

b) Mechanical test (see 10.2)

c) Lightning impulse voltage test on the primary winding (see 10.3)

d) Switching impulse voltage test on the primary winding — wet (see 10.4)

e) Radio influence voltage (RIV) test (see 10.5)

f) Power frequency voltage withstand test — wet (see 10.6)

g) Power frequency voltage withstand / partial discharge test — dry (see 10.7)

h) Temperature rise test (see 10.8)

i) Short-time mechanical and thermal rating test (10.9)

j) Accuracy performance test (see 10.10)

k) Creepage distance measurement (see 10.11)

l) Sealing system test for gas-filled instrument transformers (see 10.12)

6.2.2 Type test applicable to current transformers

The following type test shall be performed on each current transformer design:

Secondary open-circuit voltage withstand test (see 11.1).

6.2.3 Sequence of the type tests

The type tests shall be performed for each transformer design in the sequence as outlined in Figure 3 and Figure 4.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

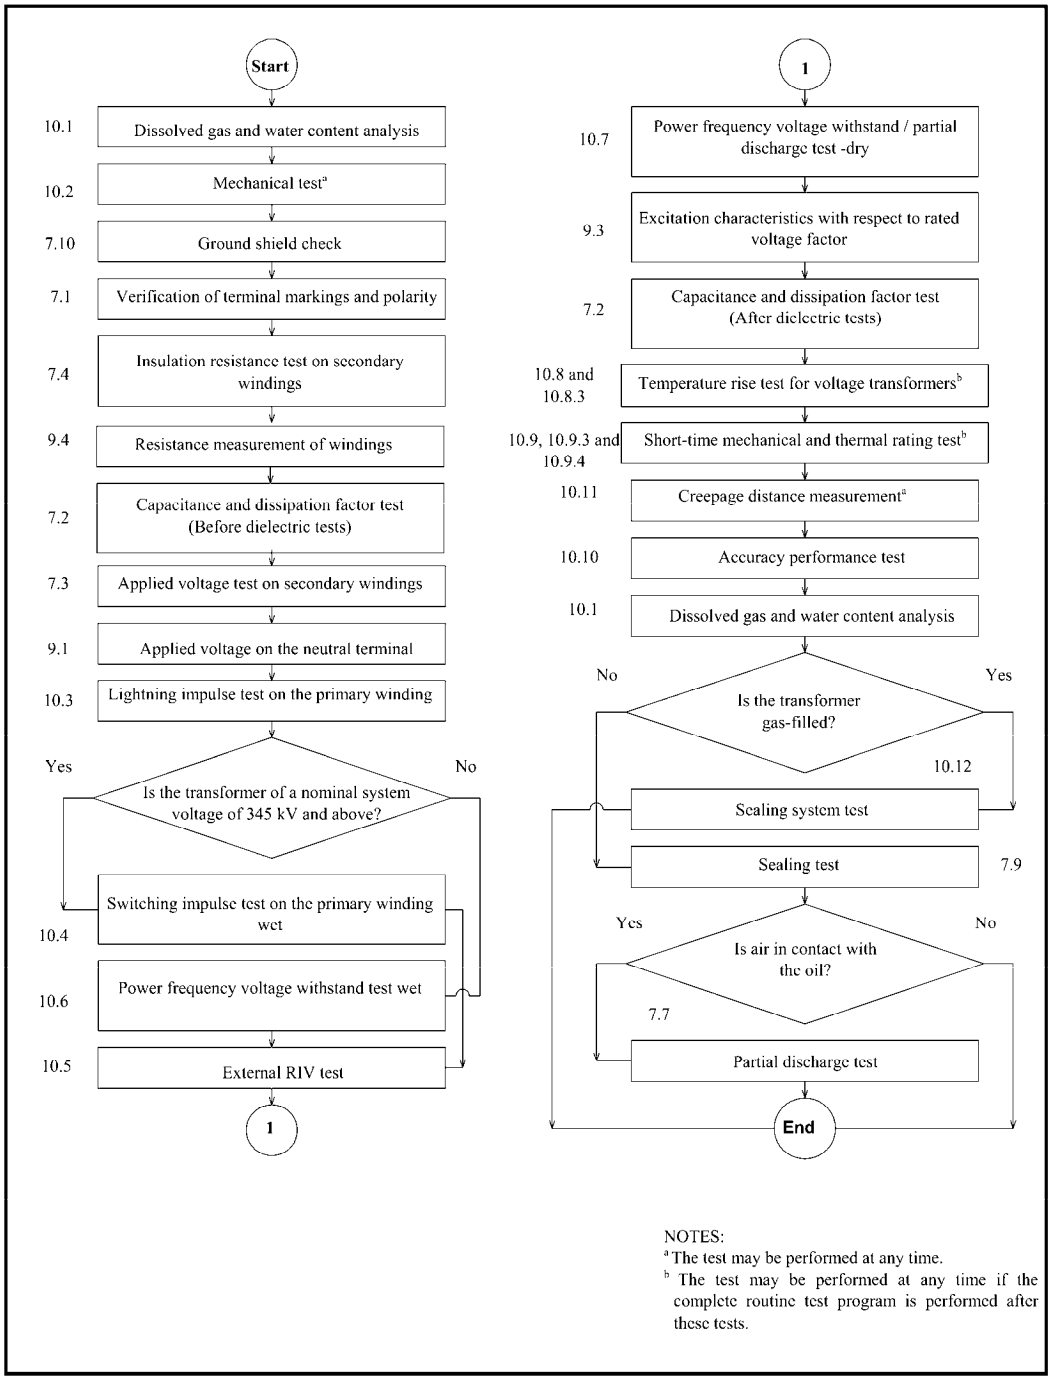


Figure 3—Flowchart of type tests on voltage transformers

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

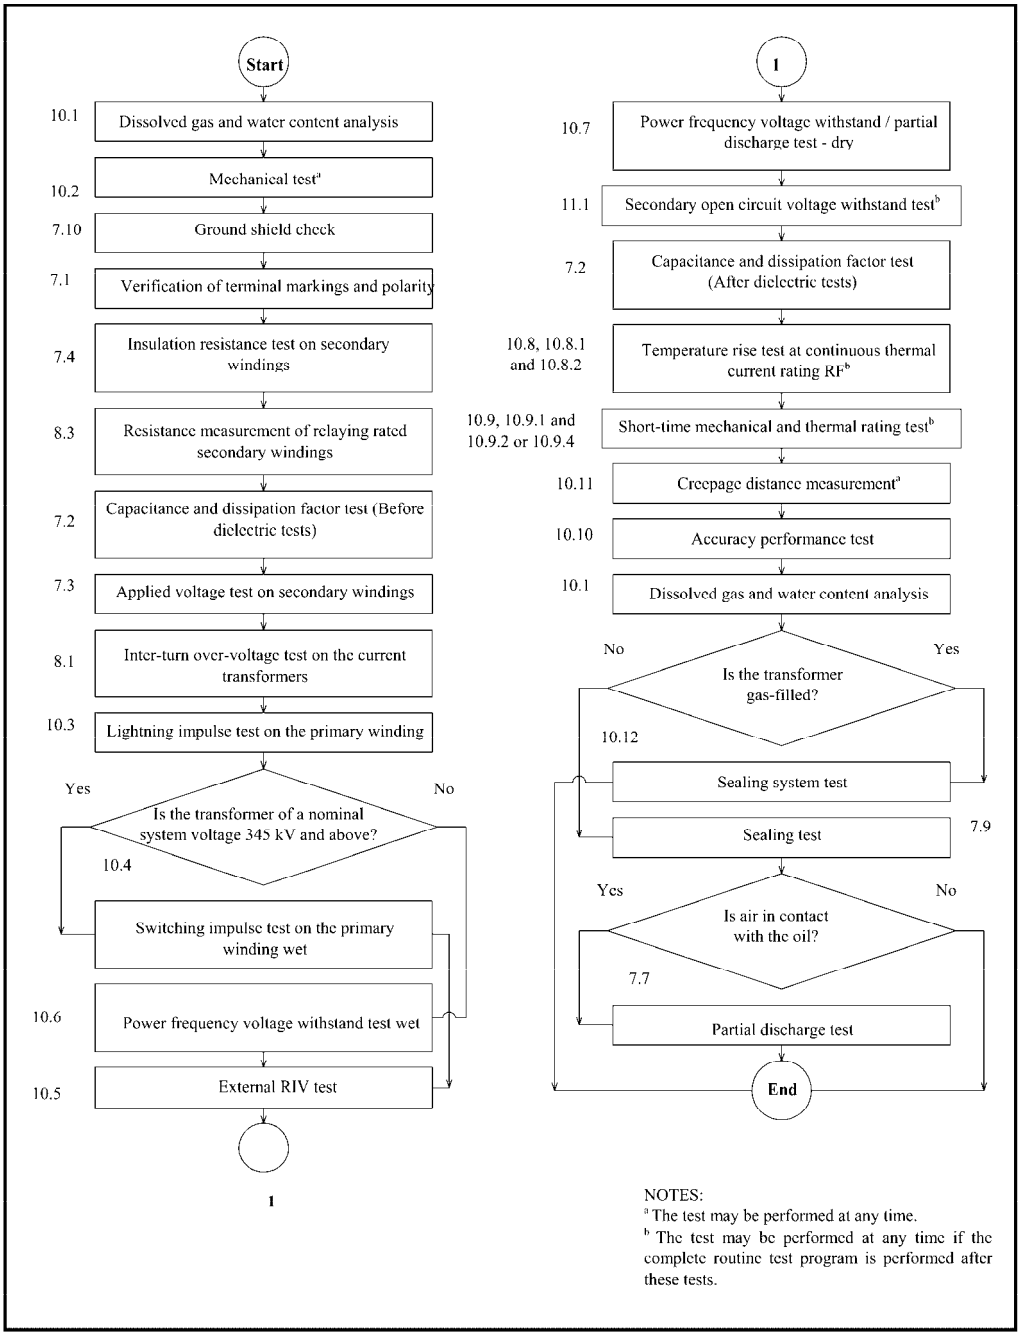


Figure 4—Flowchart of type tests on current transformers

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

6.2.4 Maximum number of samples used for the type tests

The type tests should be preferably carried out on a single sample. For the convenience of scheduling, a second sample of the same design and construction shall be allowed. In order to meet the purpose of the dissolved gas analysis, the dielectric tests shall be performed on the same transformer.

NOTE—The rationale behind "two samples" is to increase the user's confidence on the design and consistency of manufacturing. At the same time, this facilitates the manufacturer to schedule the type tests.

6.3 Special tests

Special tests are intended to verify if the instrument transformers are adequately designed and constructed in order to

a) Withstand abnormal or special service stresses induced by system operation or site conditions, or

b) Provide special features such as protection against internal arc

These tests are not mandatory and are performed only at the request of users, who should include the requirements of these tests in the specification at the time of enquiry.

The manufacturer has the option to perform the special test on a different sample, which has not been subjected to any type test.

The following is the list of special tests:

— Endurance chopped wave test (see 12.1)

— Internal arc test (see 12.2)

— Seismic test (see 12.3)

7. Routine test procedures (applicable to instrument transformers)

7.1 Verification of terminal markings and polarity

The terminal markings and polarity shall be verified for all windings. The test shall be performed during the unit assembly and repeated as a part of the accuracy test.

The polarity check shall be performed in accordance with 8.4 of IEEE Std C57.13-2008.

The terminal markings and polarity shall be in accordance with the nameplate and schematic.

7.2 Capacitance and dissipation factor test

The capacitance and dissipation factor shall be measured before and after the dielectric tests as indicated in the test sequences.

The test shall be performed at power frequency and at the following voltages:

a) 10 kV (rms)[18]

b) Maximum rated voltage

[18] The measurement at 10 kV is optional as the values are useful as a reference for commissioning.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

The temperature at which the measurements are taken shall be recorded.

The values of the capacitance and dissipation factor shall be in accordance with 4.1.2.

7.3 Applied voltage test on secondary windings

A voltage of 3 kV (rms) shall be applied to the secondary winding for 60 s.

The voltage shall be applied, while the other windings are grounded, between the winding under test and the ground.

The transformer shall be considered as having met the requirements if no disruptive discharge or collapse of voltage is observed.

7.4 Insulation resistance test on windings

The insulation resistance of the individual winding to ground and between windings shall be measured at a voltage not less than 1.0 kV (dc).

The insulation resistance shall be in accordance with 4.1.6.

7.5 Lightning impulse voltage test on the primary winding

For transformers of a nominal system voltage of 230 kV and below, the lightning impulse voltage test shall be conducted as a sample test. The sample size for the test shall be determined in accordance 7.5.1.

For transformers of a nominal system voltage above 230 kV, the test shall be performed as a routine test.

7.5.1 Determination of sample size

The user has the right to select the samples from the batch. The sample size shall be determined as described below:

a) The minimum number of samples subjected to the test shall be one for a batch of up to six units. The subsequent minimum number of samples for a batch size greater than six shall be the subsequent higher integer obtained when the batch size is divided by the integer 6.

b) If the sample fails to comply with the test requirements two additional samples from the same batch shall be tested. If one of these two additional samples fails the test, then the entire batch of transformers shall be subjected to the test.

7.5.2 Test procedure and criteria

The routine lightning impulse test shall be the simplified version of the type test outlined in 10.3 with the following modifications.

The applied voltage wave shall be of negative polarity only, and the test shall be carried out in the following sequence:

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

a) One reduced wave with 50% to 70% of the full wave value as provided in Table 1

b) One full wave

c) Two chopped waves of the value provided in Table 1, (applicable only to gas-filled transformers)

d) Two full waves

e) One reduced wave

The transformer shall be considered as having met the requirements if

— Neither external nor internal disruptive discharge is observed

— No audible noise is noted from the transformer

— No deviation is detected between the reduced wave and full wave oscillograms and/or between full wave oscillograms (see NOTE)

— No internal insulation failure is found with the capacitance and dissipation factor measurement

NOTE—It may happen that small deviations are observed between reduced wave and full wave oscillograms. If this is the case, comparison between the first and the last full wave oscillograms may be used to insure that the deviations observed when using the reduced wave oscillogram are solely caused by the different voltage level and to the corresponding non-linearities of the test circuit and/or measuring circuit.

7.6 Power frequency voltage withstand test

The power frequency voltage withstand test shall be performed in accordance with 4.1.7 and 4.1.8.

The transformer shall be considered as having met the requirements if

a) No external disruptive discharge or collapse of voltage is observed

b) No internal insulation failure is found with the capacitance and dissipation factor measurement

7.7 Partial discharge test

The pre-stress voltage shall be in accordance with Table 4.

At the discretion of the manufacturer, the power frequency voltage withstand and partial discharge tests may be performed in accordance with 10.7.

The partial discharge test shall be performed, within 30 min after the power frequency voltage withstand test, either in the same laboratory or in a different laboratory as follows:

Before the test, the setup shall be calibrated for partial discharge measurement of 10 pC.

If necessary, external electrodes may be used for the primary terminal and the ground of the transformer. The test method shall be in accordance with IEC 60270:2000.

The pre-stress voltage shall be maintained in accordance with 4.1.8. Subsequently the test voltage[19] shall be reduced to the level of the prescribed extinction voltage, which shall then be maintained for 60 s.

The partial discharge intensity shall be measured during this time.

[19] Partial discharge may be measured, at the manufacturer's discretion, as the test voltage is reduced from the power frequency voltage withstand test.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

If the intensity exceeds the limit of 10 pC after the 60 s duration, the test may be extended, at the manufacturer's discretion, by up to 30 min at the prescribed extinction voltage level.

The test shall be terminated if the measured partial discharge intensity is less than or equal to 10 pC.

The transformer shall be considered as having met the requirements if the partial discharge intensity measured at the prescribed extinction voltage level is equal to or less than 10 pC.

7.8 Dissolved gas and water content analysis for oil-immersed transformers (of a nominal system voltage of 345 kV and above)

For oil-immersed transformers of a nominal system voltage of 345 kV and above, three days after the dielectric tests an oil sample shall be taken for dissolved gas and water content analysis.

The concentration of dissolved gas and water content shall be in accordance with the values provided in Table 8. The oil sampling point shall be indicated in the test report.

NOTE 1—The analysis of an oil sample taken before the routine test program in not mandatory but highly recommended as this will ensure that no faults has occurred into the transformer during dielectric tests.

NOTE 2—If the transformer is with a limited oil volume, the manufacturer should replenish the oil removed for the test before shipping the transformer.

7.9 Sealing test

The routine sealing test may be performed at any time at the convenience of the manufacturer.

7.9.1 Sealing test for oil-immersed transformers

A sealing test shall be carried out with all the fittings and accessories installed.
If the pressure is applied with dry air or nitrogen in direct contact with the insulating oil, the air or nitrogen shall be evacuated from the instrument transformer after the sealing test. A partial discharge test in accordance with 7.7 shall be repeated to verify that the residual air within the transformer has insignificant effect on the insulation system.

The transformer shall be considered as having withstood the test if there are

a) No permanent deformation of the tank
b) No sign of oil leakage
c) No significant pressure reduction (if applicable)

7.9.2 Sealing test for gas-filled transformers

The sealing test on gas-filled transformers shall be performed with a sniffing method at the normal ambient temperature with the transformer filled to the rated pressure (or density) corresponding to the normal ambient temperature.

The transformer shall be considered as having withstood the test if there are

a) No permanent deformation of the tank
b) No gas leakage at a rate above the 20 °C limit as provided in 4.4.1.2

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

The sensitivity of the sniffer shall be adequate to detect a maximum leakage-rate of 0.5% / year.

If a leakage is detected, a test with cumulative method as described in A.2 of Annex A shall be performed at normal ambient conditions. Alternatively, after re-assembling the transformer with new sealing system, the sniffing test shall be repeated.

7.10 Ground shield check

A three–terminal capacitance and dissipation factor measurement in the grounded specimen mode and at a voltage of 1.0 kV (rms) or lower shall be performed to determine:

— The capacitance of the primary winding to the ground C_p

— The capacitance of the secondary winding to the ground C_s

— The capacitance between the primary and secondary winding C_{ps}

For gas-filled transformer the test may be performed at any setting of the gas pressure.

The presence of the ground shield shall be indicated if the measured capacitances are in accordance with Equation (2).

$$1/C_{ps} = 1/C_p + 1/C_s \quad (2)$$

The transformer shall be considered as having met the requirements if the measured parameters are within ±10% of the value determined with the above expression.

7.11 Tests on the mineral oil

The manufacturer of oil-immersed transformers shall regularly test[20] the processed mineral oil for the dielectric strength and power factor at the room ambient temperature in accordance with Table 3 of IEEE Std C57.106-2006.

8. Routine test procedures (applicable to current transformers)

8.1 Inter-turn over-voltage test

The test shall be performed in accordance with one of the following procedures. If there is no agreement between the manufacturer and user, the choice of the procedure shall be left to the manufacturer.

If secondary protective devices are provided, these devices shall be installed for the inter-turn over-voltage test.

8.1.1 Procedure A

With the secondary windings open-circuited (or connected to a high impedance device that reads the peak voltage), a substantially sinusoidal current shall be applied to the primary winding. The test current shall be increased until one of the following conditions is reached:

[20] The manufacturer is expected, in general, to test the quality of the processed oil before filling the transformers.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

a) The rms value of the applied current is equal to the maximum primary current corresponding to the continuous thermal current rating factor (RF), or

b) The peak value of the secondary induced voltage is equal to

   1) 280 V for metering rated current transformers, or

   2) 2.8 times the secondary terminal voltage rating for relaying rated current transformers

The test shall be maintained for 60 s.

8.1.2 Procedure B

With the primary winding open-circuited, a test voltage (at an elevated frequency not exceeding 400 Hz) shall be impressed to the terminals of each secondary winding. Both the test voltage and frequency shall be increased until one of the following conditions has been reached:

a) The peak value of the applied secondary test voltage is equal to

   1) 280 V for metering rated current transformers, or

   2) 2.8 times the secondary terminal voltage rating for relaying rated current transformers

b) The rms value of the secondary current is equal to the continuous thermal current rating factor (RF)

The test duration shall be in accordance with 4.1.8.

At the frequency of 400 Hz, if the voltage achieved with the secondary current value corresponding to the continuous thermal current rating factor (RF) is lower than the value provided in a) above, then the voltage obtained shall be regarded as the test voltage.

The gas pressure of the gas-filled transformer may be at any setting equal to or less than the pressure given in Clause 5 for the test.

The transformer shall be considered as having met the requirements if no external or internal disruptive discharge or collapse of voltage is observed, and, if provided, the secondary protective devices remain inoperative during the test.

8.2 Accuracy test for the metering rated current transformers

The test shall be performed in accordance with 6.11 and 8.1 of IEEE Std C57.13-2008.

The calibration of the test system provided in 4.3 shall apply.

The current transformer shall be demagnetized in accordance with 8.2 of IEEE Std C57.13-2008 before the accuracy test.

The gas pressure of the gas-filled transformer may be at any setting for the test.

The transformer shall be considered as having met the requirements if the performance is within the limits of the accuracy class.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

8.3 Resistance measurement of relaying rated secondary windings

The resistance of relaying rated windings including tap portions shall be measured in accordance with 8.5 of IEEE Std C57.13-2008. The measured value shall be corrected to 75 °C.

The gas pressure of the gas-filled transformer may be at any setting for the test.

The resistance data obtained shall be compared with the design values to ensure proper construction.

8.4 Performance characteristics of relaying rated current transformers

The test comprises the following:


a) With the primary winding open-circuited as shown in Figure 5, a substantially sinusoidal voltage equal to the secondary terminal voltage rating, corrected with the additional voltage due to the winding resistance voltage drop, shall be applied to the full secondary winding. The excitation current expressed as a percentage of the 20 times the rated secondary current shall be recorded

b) The turns-ratios of the secondary winding and the tapped portions to the primary winding shall be measured

The gas pressure of the gas-filled transformer may be at any setting for the test.

The transformer shall be considered as having acceptable performance characteristics if

1) The percent excitation current is not higher than 10%
2) The turns-ratios are in accordance with the marked ratios

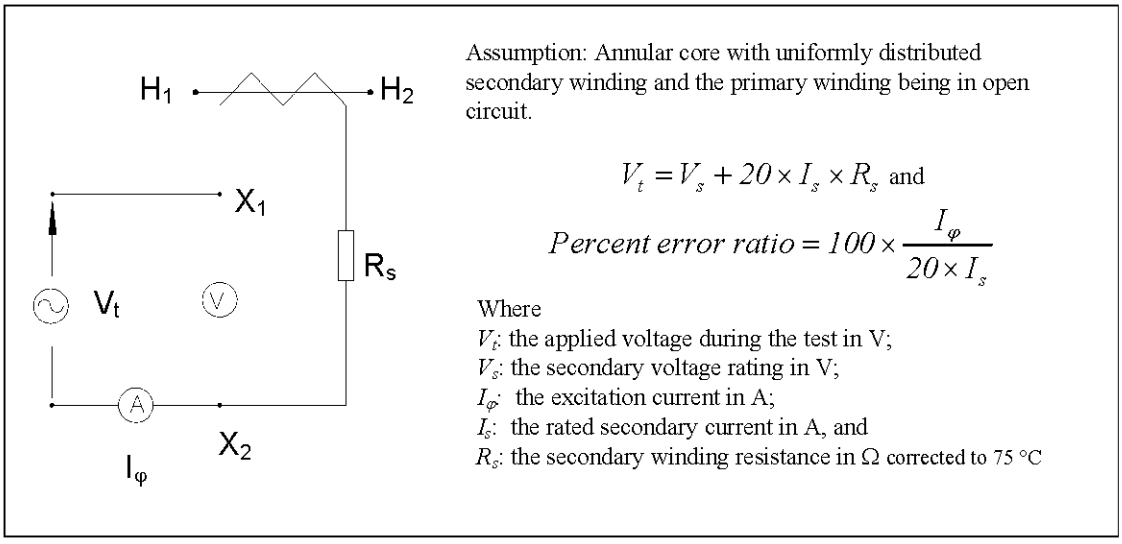

Assumption: Annular core with uniformly distributed secondary winding and the primary winding being in open circuit.

$$V_t = V_s + 20 \times I_s \times R_s \text{ and}$$

$$Percent\ error\ ratio = 100 \times \frac{I_\varphi}{20 \times I_s}$$

Where
V_t: the applied voltage during the test in V;
V_s: the secondary voltage rating in V;
I_φ: the excitation current in A;
I_s: the rated secondary current in A, and
R_s: the secondary winding resistance in Ω corrected to 75 °C

Figure 5—Measurement of the ratio error for relaying rated current transformers

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

9. Routine test procedures (applicable to voltage transformers)

9.1 Applied voltage test on the neutral terminal

With the ground link temporarily removed from the neutral terminal of the transformer, a voltage of 19 kV (rms) shall be applied between the neutral terminal and the ground for 60 s.

The gas pressure of the gas-filled transformer may be at any setting equal to or less than the pressure given in Clause 5 for the test.

The transformer shall be considered as having met the requirements if no external and internal disruptive discharge or collapse of voltage is observed.

9.2 Accuracy test

The test shall be performed in accordance with 8.1 of IEEE Std C57.13-2008.

The calibration of the test system given in 4.3 shall apply.

The gas pressure of the gas-filled transformer may be at any setting for the test.

The transformer shall be considered as having met the requirements if the performance is within the limits of the accuracy class.

9.3 Excitation characteristics with respect to rated voltage factor

The excitation current of the voltage transformer shall be measured in accordance with 8.3.2 of IEEE Std C57.13-2008, with the voltage corresponding to the rated voltage factor applied to one of the winding and with the other windings open-circuited.

The impressed voltage shall be measured with both the rms-voltmeter and the average-voltmeter (but rms calibrated). The form factor, defined in Equation (3).

$$k = \left(\frac{V_{r.m.s.}}{V_{avg}} \right)^2 \tag{3}$$

where

V_{rms} = voltage measured with the rms-voltmeter
V_{avg} = voltage measured with the average-voltmeter

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

The exciting current and the form factor shall be included in the routine test report.

The gas pressure of the gas-filled transformer may be at any setting equal to or less than the pressure given in Clause 5 for the test.

The measured excitation current shall be compared with the design value to ensure proper construction.

9.4 Resistance measurement of windings

The resistance of all the windings including tapped portions of the windings shall be measured in accordance with 8.5 of IEEE Std C57.13-2008. The measured values shall be corrected to 75 °C.

The gas pressure of the gas-filled transformer may be at any setting for the test.

The resistance data obtained shall be compared with the design values to ensure proper construction.

10. Type test procedures (applicable to instrument transformers)

10.1 Dissolved gas and water content anaylsis

For all oil-immersed transformer designs, the dissolved gas and water content analysis, in reference to Figure 3 and Figure 4 shall be performed as follows:

a) At the commencement[21] of the type test program, and

b) At the reference point[22] of the type test sequence.

The transformer design is considered as having met the requirements if the last set of results is in accordance with Table 8.

NOTE—If the transformer is with a limited oil volume, the manufacturer should replenish the oil removed for the test before shipping the transformer.

10.2 Mechanical test

10.2.1 Transformers for pedestal mounting

The instrument transformer shall be subjected to a greater of the cantilever forces in accordance with 4.4.2 for a period of 10 min.

The determination of the force due to the wind shall be in accordance with the latest edition of uniform building code. The determination of the force due to seismic load shall be based on zero-period acceleration of 0.1 m/s^2.

Successful completion shall be determined with the absence of permanent deformation of the transformer and the absence of oil or gas leakage during the test and within 2 h after the test.

[21] The analysis for oil sample taken before the type test program is not mandatory but highly recommended, as this will verify that the test object is filled with oil that meets the limits for the analysis.

[22] If two samples are used for the type test program as described in 6.2.4, then the oil sample should be taken 3 days after the completion of the last dielectric test in order to get a homogeneous dissolved gas content within the oil.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

10.2.2 Transformers for suspension mounting

The instrument transformer shall be suspended using the suspension hardware provided for this application. An additional tensile force of 13 kN shall be applied in the vertical axis to the transformer and maintained for 2 h.

Successful completion shall be determined with the absence of permanent deformation of the transformer and the absence of oil or gas leakage during the test and within 2 h after the test.

10.3 Lightning impulse voltage test on the primary winding

The test voltage shall be applied between the primary terminal and the ground terminal of the transformer. All the terminals of the secondary windings and the base frame shall be grounded during the test.

The wave-shape of the voltage shall be 1.2 μs × 50 μs. The test voltage shall be in accordance with Table 1.

The chopping device for the chopped voltage wave shall be set up as close to the transformer as possible in order to maximize the oscillatory voltage after the chopping (refer to 7.2.5 of IEEE Std 4-1995).

Both the voltage and the ground current oscillograms shall be taken.

The test shall begin with the negative polarity sequence and continue with the positive polarity sequence.

The negative polarity sequence comprises the following applications of voltage wave:

a) One reduced wave with 50% to 70% of full wave value as provided Table 1
b) One full wave
c) Two chopped waves of the value provided in Table 1
d) Fourteen full waves
e) One reduced wave

The positive polarity sequence comprises the following applications of voltage wave:

f) One reduced wave with 50% to 70% of full wave value as provided in Table 1
g) Fifteen full waves
h) One reduced wave

Several additional reduced waves may be applied, at the discretion of the manufacturer, before the test sequence with positive polarity.

The design shall be considered as having met the requirements if

1) The number of external disruptive discharges is not more than two for the sequence of each polarity,
2) No deviation is detected between the reduced wave and full wave oscillograms and/or between full wave oscillograms,

   NOTE—It may happen that small deviations are observed between reduced wave and full wave oscillograms. If this is the case, comparison between the first and the other full wave oscillograms may be used to verify that the deviations observed when using the reduced wave oscillogram are solely caused by the different voltage levels and corresponding non-linearities in the test circuit and/or measuring circuit.

3) No deviation is detected between the two chopped waves before the instant of chopping,

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

4) No internal disruptive discharge or puncture of the solid insulation is observed,

5) No audible noise is noted from the transformer during the test, and

6) No internal insulation failure is found with the capacitance and dissipation factor measurement.

10.4 Switching impulse voltage test on the primary winding—wet

The test shall be performed only on transformer designs of a nominal system voltage of 345 kV and above.

The voltage shall be applied between the primary terminal and the ground terminal of the transformer. All secondary winding terminals and the base frame shall be grounded.

The preparation of the transformer and wetting procedure shall be in accordance with 14.2 of IEEE Std 4–1995. The precipitation conditions shall be as described under the "Standard test procedure" as outlined in Table 3 of the same standard.

The voltage waveshape shall be 250 μs ± 20% × 2 500 μs ± 60% (or [200–300] μs × [1000–4000] μs) standard wave-shape. The test voltage shall be in accordance with Table 1. The applied wave shall be at positive polarity only.

The test sequence shall consist of

a) One reduced wave with 50% to 70% of rated value provided in Table 1, and

b) Fifteen full waves

The design shall be considered as having met the requirements if

1) The number of external disruptive discharges is not more than two,

2) No deviation is detected between the reduced wave and full wave oscillograms and/or between full wave oscillograms,

NOTE—It may happen that small deviations are observed between reduced wave and full wave oscillograms. If this is the case, comparison between the first and the other full wave oscillograms may be used to verify that the deviations observed when using the reduced wave oscillogram are solely caused by the different voltage level and corresponding non linearities in the test circuit and/or measuring circuit.

3) No internal disruptive discharge or puncture of the solid insulation is observed,

4) No audible noise is noted from the transformer during the test, and

5) No internal insulation failure is found with the capacitance and dissipation factor measurement.

10.5 External radio influence voltage (RIV) test

The external radio influence voltage (RIV) meter and the method used for the test shall be in accordance with the NEMA Std 107–1987.

The transformer shall be assembled with the primary terminals, connectors and electrodes, if provided. The transformer shall be set up at a level above ground not greater than the height of the supporting structure used in service. Metallic pipes of approximately 2 m in length with sphere terminations, for the simulation of the bus or line connections in service shall be assembled on each primary terminal.

The test circuit shall be calibrated for RIV measurement.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

The test voltage, in accordance with Table 3, shall be applied to the primary terminal and the meter readings shall be corrected with the calibrated RIV factor to obtain the external RIV level.

The transformer type shall be considered as having met the requirements if the external RIV level is in accordance with Table 3.

10.6 Power frequency voltage withstand test —wet

The test shall be performed only on transformers of a nominal system voltage of 230 kV and below.

The test shall be performed as outlined in 4.1.7 and 4.1.8. The preparation of the transformer and wetting procedure shall be in accordance with 14.2 of IEEE Std 4–1995. The precipitation conditions shall be as described under the "Standard test procedure" as outlined in Table 3 of the same standard.

The design shall be considered as having met the requirements if

— No disruptive discharge or collapse of test voltage is observed during the test

— No internal insulation failure is found with the capacitance and dissipation factor measurement

10.7 Power frequency voltage withstand and partial discharge test—dry

The power frequency withstand voltage and prescribed extinction voltage shall be in accordance with Table 1.

Before the test, the setup shall be calibrated for the partial discharge measurement of 10 pC. The measuring method shall be in accordance with IEC 60270:2000.

If necessary, external electrodes may be used for the primary terminals and the ground of the transformer.

As the test voltage is increased, the voltage at which the partial discharge intensity of 10 pC is detected shall be recorded. The test voltage shall then be increased until it reaches the power frequency withstand voltage level which shall be maintained for the duration in accordance with 4.1.8. Subsequently the test voltage shall be reduced to the prescribed extinction voltage level and then maintained for duration of 60 s within which the partial discharge intensity shall be measured.

If the partial discharge intensity exceeds the limit of 10 pC, the test may be extended, at the manufacturer's discretion, by up to 10 min at the prescribed extinction voltage level.

The test shall be terminated if the measured partial discharge intensity has decreased to less than or equal to 10 pC.
The design shall be considered as having met the requirements if

a) No external disruptive discharge or collapse of voltage is observed during the test

b) The partial discharge intensity measured at the prescribed extinction voltage level is equal to or less than 10 pC

c) No internal insulation failure is found by the capacitance and dissipation factor measurement

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

10.8 Temperature rise test

In order to carry out the proper test and calculations, before the test, all possible onerous load conditions for the instrument transformer design shall be reviewed and identified in accordance with the following subclauses. The test shall be performed as described in 8.7 of IEEE Std C57.13-2008 with the additional requirements provided in Annex A.

For gas-filled transformers, the gas pressure shall be at the minimum operating value. This corresponds to the equivalent gas density at 20 °C for which the second alarm level is set.

The design shall be considered as having met the requirements of 4.5 if the temperature rise is in accordance with Table 4 of IEEE Std C57.13-2008 and with the additional requirements on terminal temperature rise stated in Table 7.

10.8.1 Temperature rise test for current transformers at the continuous thermal current rating RF

If a continuous thermal current rating factor (RF) greater than unity is specified, the temperature rise of the transformer shall be determined with either of the following:

a) A temperature rise test at the maximum primary current, (i.e., RF × rated primary current)

b) An alternative calculation procedure related to the application of over-current exponent n, if the temperature rise data θ obtained with an applied current I are available, as provided below:

With the exponent n conservatively assumed a value of 2[23] in Equation (4).

$$\theta_{load} = \theta \times \left(\frac{I_{load}}{I} \right)^{n} \tag{4}$$

where

θ_{load} = Temperature rise with the maximum primary current I_{load}

The projected temperature rise, θ_{load}, at the maximum primary current shall be determined.

If the results exceed the allowable limits, a second temperature rise test, if possible, as provided in a) shall be performed. If the maximum primary current is beyond the test capability, the test with a primary current value[24] as close to the maximum primary current as possible in order to accurately determine the over-current exponent "n" based on which the temperature rises shall be derived.

10.8.2 Effects of the dielectric losses on temperature rise for current transformers

Before the temperature rise test, the dielectric losses of the transformer at the maximum rated voltage and the total primary and secondary winding dc resistance losses shall be measured.

[23] The second test is not required if the projected temperature rises with exponent n equal to 2 are below the limits.
[24] For an accurate determination of the exponent n, the primary current value should be preferably within 30% of the maximum primary current.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

If the primary winding dc resistance loss is difficult to be accurately measured, then, based on the test current, material, reference temperature, and physical dimensions of the primary conductor, the primary winding dc resistance loss shall be calculated.

If the dielectric losses are more than 20% of the total winding dc resistance losses, the test[25] shall be conducted with the maximum rated voltage applied to the primary winding, which carries the rated current.

If the dielectric losses are equal to or less than 20% of total winding dc resistance losses, the test shall be performed at the rated current only. However, a correction due to the dielectric losses shall be applied to the temperature rise in accordance to Equation (5).

$$\theta_r = \theta_m \times \left(1 + \frac{P_{diel}}{P_{I2R}}\right) \quad (5)$$

where

θ_m = Temperature rise measured during the test

θ_r = Temperature rise corrected for the dielectric losses,

P_{diel} = Dielectric losses at the maximum rated voltage,

P_{I2R} = Total winding dc resistance losses corrected to 75 °C.

10.8.3 Temperature rise test for voltage transformers

The test with maximum accuracy burden shall be conducted at the rated primary voltage multiplied by a rated voltage factor of 1.1 or by any other rated voltage factor (>1.1) if specified duration is longer than 2 h.

The transformer shall be loaded with the total accuracy burden (at any power factor convenient for the test) distributed amongst the secondary windings and tapped portions of them in a manner that has the worse thermal effect to the transformer.

If a thermal burden rating is specified, then an additional temperature rise test at the thermal burden rating shall be made at the rated primary voltage.

The distribution of the burden amongst the secondary windings depends on the specification. When a total thermal burden rating is specified for the transformer only, the burden shall be arranged in such a manner that imposes the worse thermal effect to the transformer. When a thermal burden is specified for simultaneous application to individual secondary windings, the transformer shall be tested accordingly.

The above two tests may be combined into a single test using the most onerous test conditions in terms of thermal effects as outlined above.

10.9 Short-time mechanical and thermal rating test

The test and calculation methods shall be in accordance with 8.6 of IEEE Std C57.13-2008 except with the following modifications.

[25] It is acceptable to short circuit the primary winding and to supply the required secondary current in order to have rated primary current flowing in the primary winding. This should be verified before the test with an appropriate measuring device. Alternatively, the rated primary current can be provided with a power supply insulated for the maximum rated voltage.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

10.9.1 Short-time mechanical test for current transformers

The magnitude of the first asymmetrical current peak applied to the primary winding of the transformer shall be equal to or greater than 2.7 times of the rated short-circuit current. The test shall be maintained for 100 ms or 6 cycles at 60 Hz.

This test may be combined with the short-time thermal rating test. In this case, the time for short-circuit current shall be 1 s.

10.9.2 Short-time thermal rating test for current transformers

The test shall be performed with the rated short-circuit current or a current, which provides an equivalent thermal effect, (i.e., I^2t, applied to the transformer). If the "equivalent-I^2t-method" is used, the following conditions shall apply:

a) The minimum duration for rated short-time current is 1 s, and

b) The maximum duration is 5 s.

Instead of performing the test, calculations may be provided if the current densities for the primary and secondary windings and related current-carrying components[26] are below the limits provided in 8.6 of IEEE Std C57.13-2008. More information is provided in 10.9.4.

10.9.3 Short-time mechanical and thermal rating test for voltage transformers

The test shall be made to prove compliance with 4.11.

The test shall be preferably performed at the rated frequency.[27] The applied voltage to the primary winding of the transformer shall be maintained at the rated value during the test.

For a transformer with a single secondary winding without tapped portion, the test shall be performed with a short circuit applied to the secondary terminals.

For a transformer with different secondary winding arrangements, the short-circuit impedances of the secondary windings and their tapped portions shall be measured. A calculation based on the measured impedances shall be performed to determine which case(s) of secondary short circuit will provide the worse condition in terms of highest current amplitude and current density. The tests shall then be performed accordingly.

To produce the highest current amplitude and density in the primary winding, a simultaneous short circuit shall be applied to the terminals of all the secondary windings including their tapped portions. The test may be alternatively performed with rated voltage maintained across the secondary winding during the test when short-circuiting the primary terminals.

Each test shall be maintained for 1 s.

Sufficient time, if necessary, shall be allowed for the transformer to cool down between tests.

[26] For example, the current densities of the secondary leads and connecting bar of the multi-turn primary and for the bushing(s) should be determined in the calculations.

[27] Due to the test capability, a power frequency different from the rated may be used (e.g., 50 Hz versus 60 Hz) with the test voltage appropriately adjusted for the impedance change of the test object. The same current amplitude as calculated for the rated frequency should be obtained.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Oscillograms of the applied voltage, secondary current and the primary current shall be recorded during the test.

10.9.4 Short-time thermal rating calculations

The basis of the short-time thermal rating calculations shall be in accordance with the 8.6.2 of IEEE Std C57.13-2008.

For current transformers, the determination of the stray conductor loss ratios shall be in accordance with 8.6.3 of IEEE Std C57.13-2008.

For voltage transformers, the calculation of the values for the secondary short-circuit current shall be in accordance with 8.6.4 of IEEE Std C57.13-2008.

10.9.5 Criteria for the short-time mechanical and thermal rating test

The design shall be considered as having met the requirements if

1) The inspection and examination after the test reveal no apparent physical damages that will impair the performance of the transformer
2) The transformer, after the test, complies with all the routine test requirements and the accuracy performance remains unchanged
3) The calculated short-circuit current densities are in accordance with 8.6.2 of IEEE Std C57.13-2008

10.10 Accuracy performance test

The test shall be similar to the routine accuracy test provided in 8.2 and 9.2 except that more measurements shall be taken to verify the accuracy performance for specified ranges of service conditions.

The design shall be considered as having met the requirements if the accuracy results are within the limits for the declared accuracy class.

10.11 Creepage distance measurement

The creepage distance of the insulator used for the transformer shall be measured as follow:

After the insulator or the transformer has been mounted on a horizontal plane, a vertical line of reference shall be established along the insulator.

The surface creepage distance between the top metallic flange (or electrode) and bottom flange (or ground electrode) along the reference line shall be determined with a non-stretchable gum tape.[28]

After the removal of the tape from the surface of the insulator, the length of the tape shall be measured.

The design shall be considered as having met the requirements if the creepage is in accordance with Table 2.

[28] Fiberglass gum tape with extremely low coefficient of elasticity is considered acceptable.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

10.12 Sealing system test for gas-filled instrument transformers

The gas leakage-rate test shall be performed in accordance with A.2.

The transformer shall be considered as having met the requirements if:

a) The leakage-rates measured at normal room ambient temperature before and after the test do not exceed the permissible limit of 0.5% / year

b) The leakage-rate measured at lowest extreme ambient temperature does not exceed the appropriate permissible limit, in reference to 4.4.1.2, depending on the reference temperature range

c) The gas density switches installed on the instrument transformer do not give any alarm throughout the entire test sequence

d) The gas lost during the entire test sequence does not reach the alarm level of the density switches

11. Type test procedure (applicable to current transformers)

11.1 Secondary open-circuit voltage withstand test

The test shall be performed at the rated frequency with the applied current equal to the rated value multiplied by the continuous thermal current rating factor (RF). A substantially sinusoidal current waveform shall be maintained during the entire course of the test.[29]

All the secondary protective devices, if provided, shall be installed for the test.

One of following methods shall be used for the test:

a) Before the test starts, the secondary winding under test shall be short-circuited with either a switch or a circuit breaker. The test current shall be applied to the primary winding. After the current has reached the test value, the switch or circuit breaker across the secondary terminals shall be opened for 60 s

b) With the secondary winding under test open-circuit, a current of the test value shall be suddenly applied to the primary winding for 60 s

The test shall be repeated for remaining secondary windings of the transformer.

The test current and secondary open-circuit voltage shall be recorded as part of the test report.

The design shall be considered as having successfully withstood the dielectric stresses produced by the test if

1) No physical damage is noted that will impair the performance of the transformer,

2) In the case of designs with secondary voltage limiting devices, the arc shall be confined between the devices only during the test,[30]

3) The current transformer complies with the routine test requirements.[31]

[29]The test is normally carried out in a high power laboratory because the apparent power necessary to maintain substantially sinusoidal current is higher than 20 MVA.

[30]Any damages to other parts of the secondary terminal cabinet are not acceptable.

[31]Any secondary protective device should be replaced before the routine tests.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

12. Special test procedures

12.1 Endurance chopped wave test

The test is applicable for instrument transformers of a nominal system voltage of 345 kV and above.

The test shall be performed with the transformer at normal ambient temperature in accordance with IEEE Std 4-1995.

For all oil-immersed transformer designs, an oil sample shall be taken before the test and minimum 3 days after the test for the purpose of dissolved gas content comparison.

The voltage of the chopped wave shall be 80% of the rated lightning impulse voltage (Full wave) provided in Table 1 and the polarity shall be negative only.

The test consists of 600 consecutive chopped waves. The time, between consecutive applications shall be approximately 1 min.

If agreed between manufacturer and user, the number of chopped-wave tests may be reduced to 100.

Details of the test are provided in A.3.

The design shall be considered as having met the requirements stated in 4.8 if

a) The transformer withstands the power frequency voltage withstand and the partial discharge test in accordance with 7.6 and 7.7

b) For oil-immersed transformer, there is no significant increase of the dissolved gas contents compared with those before the test

c) The inspection and autopsy of the complete internal insulation structure for the dismantled transformer reveal no trace of tracking or burnt mark

A significant increase of dissolved gas content is considered, with the exception of acetylene, as approximately twice the maximum acceptable limit shown in Table 8. There shall not be any increase of acetylene concentration level.

12.2 Internal arc test

Before the test, the manufacturer shall submit the insulation design report to the user for review. The report shall include a description of the insulation system for the transformer. With the necessary calculations, drawings and electric field studies, the manufacturer shall justify the location of the fuse element within the test sample. The dimensions and material of the ground shield lead shall form part of the report. The manufacturer shall also describe the strategy of limiting the hazardous effects in the event of an internal arc.

The test shall be performed to verify the design with the special features intended to limit the hazardous effects of an internal arc.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

12.2.1 Requirement of the fuse element installation

The fuse element shall be installed at the location where the dielectric stress is the highest and in the position that is the least favorable for the controlled pressure relief.

12.2.2 Test conditions

The test shall be conducted under the following conditions:

a) The test current shall be the rated short-circuit current initiated as close as possible to the voltage zero crossing in order to obtain a fully asymmetrical current,

b) The tolerance on the angle of initiation of fault current shall be ±15°,

c) The frequency of the test current shall be between 48 and 62 Hz,

d) The test current shall be maintained at least for 0.2 s (12 cycles at 60 Hz),

e) The power source shall be capable of maintaining a sinusoidal current throughout the entire course of the test. It shall also be capable of obtaining, as a minimum, an asymmetrical peak current of 2.7 times the rms symmetrical current in the presence of the arc voltage, and

f) For the gas-filled transformer, the gas pressure shall be set at the maximum rating value.

The arc shall be initiated by means of a copper wire of 0.5 mm in diameter or 24 AWG.

The transformer shall be mounted on a pedestal of minimum 300 mm high to simulate service conditions.

An enclosure with the same height as the pedestal shall be used to concentrically encircle the transformer during the test. The diameter of the enclosure shall be equal to the sum of the diameter or largest horizontal dimension of the transformer and twice the height of the transformer, with a minimum diameter being equal to 1800 mm.

12.2.3 Test Requirements

The design shall be considered as having successfully withstood the test if

a) For transformer with internal arc protection class I, the debris of the fractured insulator, housings and broken components of the transformer are confined within the prescribed enclosure. This requirement does not apply to the pressure relief device (e.g., rupture disc)

b) For transformers with internal arc protection class II, there is no fracture of the insulator or housings. This requirement does not apply to the pressure relief device (e.g., rupture disc)

NOTE—Unless it is specified otherwise, fire due to the burning oil is acceptable.

12.3 Seismic qualification

The transformer shall be qualified in accordance with IEEE Std 693-2005. The manufacturer shall review the pertinent clauses of the standard applicable to their design. Either a shake table test or seismic analysis on the transformer type shall be performed as required in the user's specification.

The design shall be considered as having met the requirements if the results of the shake table test or analysis are in accordance to the user's specification.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

13. Identification of test sample in the type test report

The test sample for the type tests shall be identified in the test report to meet the objective of 4.10.

The manufacturer shall submit to the test laboratory:

a) A document package uniquely identifying the sample

b) A "Certificate of Sample Identification" stating that the submitted documents uniquely identify the sample with the assigned serial number

After checking the conformity of the sample to the submitted document package, the test laboratory shall include in the test report a copy of the "Certificate of Sample Identification" and a statement that the verification of the sample has been completed.

13.1 Document package related to transformer type

The manufacturer shall maintain the design and manufacturing records for the sample, which are identifiable in the document package.

13.2 Requirements of the document package

For the purpose of correlating the design and manufacturing records of the sample, the manufacturer shall submit, if applicable, but not limited to the following documents to the test laboratory:

a) Data on type identification:
   1) Manufacturer's name
   2) Model type and ratings
   3) Serial number
   4) Factory work-order number for the manufacturing of the sample

b) Drawings related to the transformer type:
   1) Outline drawing showing the dimensions, mass and description
   2) Main nameplate and other rating plates
   3) Schematic diagram
   4) Drawing of the terminal cabinet showing the layout of the secondary terminals
   5) Drawing of the insulators
   6) Information on the pressure relief device
   7) Secondary protective devices on the secondary terminals

c) References to identify the following design documents and specifications:
   1) Winding specifications for different windings
   2) Engineering calculation report
   3) Core specifications

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

4) Major insulation plan

5) Bill of materials showing the first level assemblies

6) Cross-sectional view of the unit assembly

d) Information on the manufacturing of the sample:

1) List of manufacturing procedures

2) Quality records, i.e., inspection and test records

The document package shall bear a unique document reference number, which shall be included in the "Certificate of Sample Identification."

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex A

(normative)

Test code

A.1 Temperature rise test

Temperature rise test shall be carried out in an area that is as free from draft as practicable.

NOTE—In general, this condition is met when the air velocity does not exceed 0.5 m/s.

A.1.1 Measurement of the ambient and top tank cover temperatures

As a minimum, three thermometers or thermocouples shall be used for the measurement of the ambient temperature. They shall be distributed around the periphery of the transformer as described in 8.7.2 of the IEEE Std C57.13-2008 at a horizontal distance of approximately 1 m from the transformer. They shall be placed, in practice, in non-metallic containers filled with approximately half-liter of oil.

For oil-immersed transformers, the temperature of the tank cover or the metallic bellows shall be measured with a thermocouple. A second thermocouple shall be used to determine the temperature of the external surface of the tank.

For gas-filled transformers, the temperature of the tank cover shall be measured with a thermocouple.

A.1.2 Measurement of the temperature rise

The temperature rise measurements shall be performed as described in 8.7.3 of IEEE Std C57.13-2008. The ultimate average temperature rise for the winding shall be determined with the resistance method. Other methods shall be permitted only if it is impracticable to use the resistance method.

Shutdown of 5 min or less is allowed for every four hours of the test in order to determine the progress of the test.

The transformer shall be considered in thermal equilibrium with the ambient air if the following conditions are met:

a) When the duration of test is equal to or longer than 5 times the thermal time constant[32] of the transformer.

b) When all three consecutive sets of temperature rise readings (difference between the temperature of the tank cover and the average ambient temperature) taken, without shutdown, at intervals of no less than 30 min show the change of temperature rises is equal to or less than 1 °C. When shutdowns are necessary for the determination of the temperature rises for the windings, the two consecutive sets of temperature rise readings shall not show a difference of more than 1 °C.

[32] Before the test, the manufacturer should estimate the thermal time constant of the test object. This estimation may be based on the results of the previous test on similar design or calculations. The thermal time constant can be accurately determined from the temperature rise curve obtained with several shutdowns during the course of the test.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

NOTE—A non-contact device (e.g., an infrared temperature measuring device) can be used for temperature measurements provided it is calibrated for the emissivity of the tank cover.

A.1.3 Requirements of the bus connection for current transformers

The bus that connects to the primary terminals of the transformer shall extend not less than 1 m beyond the terminals. The temperature of the bus 1m from the transformer, during the test, shall be within ±5 °C of that of the terminals.

A.2 Sealing system test for gas-filled instrument transformers

The sealing system test shall be conducted on the transformer with the sealing system completely installed and filled with the same gas mixture as intended in service. The gas pressure shall be properly adjusted to the rated filling pressure. The transformer shall be set up as in service with the possible exception of positioning because of the physical limitation of the environmental chamber.

A.2.1 Arrangements of the test set-up

The transformer shall be installed in a relatively tight enclosure of a known volume (e.g., plastic tent) within the environmental chamber where the temperature can be controlled for the test range of temperatures, since only the cumulative leakage measurements are to be taken for the determination of leakage-rates. The enclosure shall be designed to allow for the physical dimension changes of the material due to the temperature variations.

Provisions for change of the gas content between tests within the enclosure shall be included. If for some reasons the gas content is too high, it is permissible to reset the gas content of the enclosure by purging and repeat the leakage-rate measurement.

The measuring equipment shall have the minimum accuracy of measuring a leakage-rate of 0.2% / year.

The equipment shall be calibrated before each series of tests by injecting a known quantity of gas mixture into the enclosure.

Fans may be installed in the enclosure in order to get a homogeneous mixture of gas. Additional heaters fitted into the enclosure may be necessary in order to fulfill the required rate of temperature rise of 10 °C/h.

The ambient temperature of the enclosure shall be measured with a minimum of three thermocouples located at approximately 300 mm from the transformer and equally distributed along the height of the transformer. For the lower ambient temperature limit, T_L, a tolerance of ± 3 °C is specified.

A.2.2 Test procedure

The test shall be performed as follow:

a) The leakage-rate at ambient temperature 20 °C (±5 °C) shall be measured.

b) The ambient temperature of the enclosure shall be decreased to the appropriate lower limit of the ambient temperature, T_L (±3 °C), in accordance with the operating range of temperature for the transformer. An initial leakage-rate shall be taken at T_L (±3 °C).

c) The transformer shall be left at the lower ambient temperature limit, T_L (±3 °C), for a minimum period of 24 h throughout which the difference between the temperature at the top and at the bottom of the transformer shall be less than 5 °C.

d) A final leakage-rate shall be measured at T_L (±3 °C) at the end of the period.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

e) The ambient temperature shall then be returned to the normal room ambient temperature at an average rate of 10 °C/h.

f) After the transformer has stabilized at the normal room ambient air temperature (20 ±5 °C), the leakage-rate shall be measured.

A.3 Endurance chopped wave test

A.3.1 Sequence of the test program

The endurance chopped wave test program shall be performed in the following sequence:

a) Before the test, an oil sample shall be taken from the transformer for dissolved gas content analysis, if the test object is an oil-immersed transformer

b) As a minimum, 600 chopped wave tests shall be applied to the transformer at a rate of approximately one impulse per minute

c) At least 3 days after the test, an oil sample shall be taken from the transformer, if it is oil-immersed, for dissolved gas content analysis

d) The transformer shall then be dismantled for autopsy

A.3.2 Requirements of the applied wave

The applied voltage wave shall be a standard 1.2 μs × 50 μs impulse chopped close to the peak. The chopping time, for example is the time interval from the chopping instant to the zero crossing of the applied voltage shall be equal to or less than 0.32 μs. A longer chopping time is acceptable provided that the chopping device is located at a distance equal to or less than the total height of the transformer and that no additional resistance is introduced in series between the transformer and the chopping device as described in 7.2.5 of IEEE Std 4-1995. The voltage shall be measured and recorded in accordance with Clause 7 of IEEE Std 4-1995.

A.3.3 Chopping device

The applied voltage shall be chopped with a suitable device. Because a shorter chopping time than normal is critical for the test, a chopping device made of multiple series connected sphere gaps should preferably be used to the rod gap.

A.3.4 Current transformer connections

The impulse voltage shall be applied to the primary winding with all secondary windings short-circuited and grounded through a current sensor for the measurement of the ground current.

A.3.5 Voltage transformer connections

The test voltage shall be applied to the primary terminal, while the neutral terminal shall be grounded through a current sensor. The secondary winding terminals shall be short-circuited and grounded through a separate current sensor for the measurement of the ground current.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

A.3.6 Measurement of voltage and current

For each application of the wave, the peak voltage shall be measured with a peak voltmeter. After a series of fifty consecutive tests, oscillograms of the voltage and current(s) shall be taken and compared with earlier tests.

A.3.7 Detection of failure

Any unexplained deviation between the reduced and any full chopped-wave detected with the comparison of the two voltage oscillograms up to the time of voltage wave chopping, is an indication of a failure or probable change of conditions in the circuit external to the transformer or triggering of protective devices.

Any unusual noise detected within the transformer at the instant of applying the impulse is an indication of a failure.

For the above cases, an investigation should be conducted to determine the causes of the problem.

Any induced voltage recorded in the measuring system during the 1st μs shall be disregarded. Due to the difficulties in interpretation, the deviation between the reduced and any full chopped wave after the voltage wave chopping shall be disregarded.

A similar diagnostic procedure shall apply to the oscillograms for the ground current.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex B

(informative)

Dielectric test performed at an altitude of 1000 m or less for instrument transformers designed for installation at altitudes greater than 1000 m

Because of reduced air density, a table of dielectric strength correction factors for altitudes greater than 1000 m is provided in Table 1 of IEEE Std C57.13-2008.

Ideally, in order to verify that the transformers are appropriately designed and manufactured, the voltages to be applied for the dielectric tests, if conducted at an altitude of 1000 m or less, should be in accordance with those in Table 1 of this standard adjusted with the correction factor for the altitude corresponding to the site. Correction factor should be established using IEEE Std 4-1995.

Such method necessitates oversizing the internal insulation because of the test level increase. For some designs, this can be accomplished without substantial cost increase but for some other designs of instrument transformers, e.g., voltage transformers,[33] this may lead to significant cost increase.

The insulation withstand capability of high voltage instrument transformers is a complex matter. In order to have the optimum voltage withstand capability, (mainly during wet conditions) for a given insulator, the co-ordination between the external and internal insulation needs to be properly implemented.

Several solutions to this problem are outlined in the following list (which, by no means, is complete):

a) The user may consider specifying the transformers to be dielectric tested to the voltage levels with the appropriate altitude correction factor

b) The user may consider specifying the prototype to be dielectric tested in a laboratory located at the required operating altitude or higher with the rated test voltages and the remaining transformers to be dielectric tested with the rated insulation levels without considering the altitude correction factor

c) The user may consider specifying an external insulation (or hollow insulator) with a proven performance that meets or exceeds the corrected insulation levels to be used and a report comparing the existing and new internal insulation plans showing the layout of the grading electrodes to be submitted for his approval. A low voltage test should also be agreed upon between the user and manufacturer for verifying the internal insulation is correctly implemented for the transformers. The routine dielectric tests should be performed at the rated voltage levels without the altitude correction

NOTE—The low-voltage test is for checking voltage distribution along the bushing tube. During the test, the voltages at the grading electrodes or rings can be determined using the capacitive coupling (or pickup) method. It may be one of the two tests suggested below:

— An applied voltage test at power frequency of a suitable level, which will not likely cause insulation damage

— A transient voltage test with the use of a recurrent surge generator

The choice of one of these solutions may lead to significant additional costs and the matter should be fully discussed and agreed upon between the user and the manufacturer.

[33] Under normal conditions, a voltage transformer of nominal system voltage of 245 kV is a single coil design. However, with over-dimensioned insulation, it can be a cascade coil design, which requires much more materials and labor than single coil design.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

The purpose of the annex is

— To outline the complexity of the underlying problem

— To encourage discussion thereby better solution will surface

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex C

(informative)

Dielectric tests, oil sampling, and other related measurements in the field

It is recognized that the dielectric tests impose a severe stress on the insulation. If applied frequently, the dielectric test may cause an irreparable damage to the transformer. Consultation with the manufacturer regarding the appropriate field dielectric tests is a good measure against undue field problems. Extreme caution shall be exercised during the test.

The standard recommends, in general, that

- Field tests of insulation shall not be in excess of 75% of the factory test voltages
- DC voltage tests, except the insulation resistance or Megger test, are not recommended for high-voltage instrument transformers
- Read the instruction manual provided with the transformers
- For gas-filled transformers, after the final gas filling to the proper pressure, a dew-point reading should be taken and recorded
- When in doubt, consult with the factory before proceeding with the test
- Oil sampling should be performed on very rare occasions, as the quantity of oil in instrument transformers is very limited. It is always a good practice to check with the manufacturer before any oil sampling. This is important because, in addition to the limited volume, special devices and techniques may be necessary to prevent air or moisture ingress into the inside of the transformer. If oil samples are frequently taken, the users are at risk of major insulation failure due to the seriously depleted oil level inside the transformer

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex D

(informative)

Internal arc protection for instrument transformers

The working group responsible for the development of this document clarifies its position on the issues of internal arc protection as follows:

a) Since insulation performance is probabilistic in nature, the "technically most probable" fault location conveys no further implication than its literal meaning. Henceforth, any internal arc protection scheme is no assurance that the transformers will perform as expected under an internal arc situation.

b) The purpose of including these definitions and tests is

   1) To reflect what some users want at present

   2) To encourage discussion, thereby a better version will evolve

   3) To induce awareness rather than to provide sense of security

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex E

(normative)

Validity of type test reports and guidance for reviewing the design comparison report for the modified design

E.1 Validity of type test reports

The type test report shall remain valid as long as there is no change in the design with respect to the materials, parts and manufacturing procedures. If there are changes made to the design, the manufacturer shall submit a report comparing the qualified with the modified design to the user. The manufacturer shall provide the user access to the relevant documents for assessing the effects of the design changes to the type test report. The user has the option to request the type test program to be repeated in parts or in its entirety if the user does not accept the submitted document.

E.1.1.1 Content of the comparison report

The comparison report shall provide the description and data of the materials, and components used for both the type tested design and the modified transformer. A comparison of the performance under both test and operating conditions shall be made to demonstrate the favorable effects of the design change. The report shall also recommend appropriate action necessary to qualify the modified design.

E.1.1.2 Time of notification

The manufacturer shall notify the user when the comparison report will be available at the time he submits the contract documents for approval.

E.1.1.3 Confidentiality of information

The information provided by the manufacturer shall not be revealed to the third party without the written consent of the manufacturer.

E.2 Guidance of reviewing the comparison report

For reviewing the comparison report on design change, the following is a typical list of critical design parameters. It should be noted the list is by no means complete and varies from one case to another. It should be considered as a reference list.

a) Dielectric test data:
   1) Same or lower test voltage levels,
   2) Same dimensions, type and profile of the insulator
   3) Same dimensions and contour of the primary electrode
   4) Same primary winding
   5) Same internal voltage grading system
   6) Same shape and dimensions of the metallic core housing containing the secondary windings (e.g., the dielectric tests may be applicable if the secondary windings are located within the same housing for current transformers with different transformation ratios or accuracy classes.)

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

7) Same or higher supporting structure

8) Same manufacturing processes

b) Thermal characteristics:

1) Same or lower test current

2) Similar rated frequency: If the test frequency is different (e.g., 50 Hz versus 60 Hz) the results have to be carefully analyzed. It is generally accepted that a test performed at 50 Hz covers the performance of a 60 Hz apparatus provided that the temperature rise values recorded during the test at 50 Hz do not exceed 95% of the temperature rise limit

3) Same or lower current density in the primary winding

4) Same or lower current density in the secondary windings

5) Same or lower "I^2R" losses in the primary winding

6) Same or lower "I^2R" losses in the secondary windings

7) Same or lower dielectric losses

8) Same or lower core losses with the rated secondary loads

9) Same or lower ratio "Total losses / insulating fluid volume"

10) Same or lower ratio "Total losses / external thermal dissipating surface," the thermal dissipating surface being the metallic surfaces (top head and bottom tank)

11) Same manufacturing processes

c) Short-circuit performance data:

1) Same or lower test current

2) Same or lower current density in the primary winding

3) Same or lower current density in the secondary windings

4) Same or lower "I^2t" requirement in the primary winding

5) Same or lower "I^2t" requirements in the secondary windings

6) For current transformers, same primary conductor length, shape and material

7) Same mechanical construction (mechanical stiffeners, insulating material shape and dimensions)

8) Same manufacturing processes

d) Secondary open-circuit withstand capability:

1) Same or lower saturation curve (saturation voltage)

2) Same insulation material used on the conductors used for secondary windings

3) Same or lower voltage between turns and/or layers of the secondary windings

4) Same insulation system used on the conductors for secondary winding as used for the connection between the terminal box and windings

5) Same secondary winding bushings

6) Same voltage limiting devices

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex F

(informative)

Rated voltage factor

The term is defined in Clause 3 of this standard and used in both 9.3 and 10.8.3 to ensure that the transformers are appropriately tested. A set of proposed values for the rated voltage factor is provided in Table F.1 for reference only.

Table F.1—Proposed values of rated voltage factors

Rated voltage factor	Rated time
1.1	Continuous
1.5	30 s
1.9	30 s

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex G

(normative)

Current transformers used for the detection of unbalance current of capacitor banks

G.1 General

G.1.1.1 Scope

This annex provides the requirements and description of necessary tests for current transformers used for the detection of unbalance current of capacitor banks. Since this special type of current transformers can be subjected to unique stresses, which are not totally covered by standardized tests, the annex provides the description of the necessary tests.

NOTE—This annex does not apply to current transformers having two primary conductors with current flowing in opposite directions e.g., having the capacitor bank split in two branches and the current from each half going through the current transformer in opposite directions. For such arrangement, a negligible dielectric stress may appear on the insulation material fitted in between the conductors during fault on one of the branches since the inductive voltage difference between the two conductors is generally very low (1 to 2 μH only).

G.1.1.2 Annex precedence

Where information in the annex conflicts with that provided elsewhere in the standard, the annex information shall take precedence for current transformers used for measuring unbalance current of capacitor banks.

G.2 Definition

Unbalance current transformer: A current transformer used to detect the unbalance current within a capacitor bank for the purpose of determining one or more faulty capacitor units. In addition, this type of current transformer is used to protect the capacitor bank in case of a large number of defective capacitor units.

G.3 General requirements

G.3.1.1 General

Generally, current transformers used for detecting unbalance current of capacitor banks have a very low turns ratio, typically 1:1 or 2:1. In addition, the primary continuous current rating is low, typically less than 10 A and the primary winding is normally made of several turns typically between 50 to 100 turns. Because of a relatively high number of primary turns, the leakage inductance is significant. This type of transformer is normally classified as T class as defined in IEEE Std C57.13-2008.

Typical arrangements are shown in Figure G.1 and Figure G.2.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

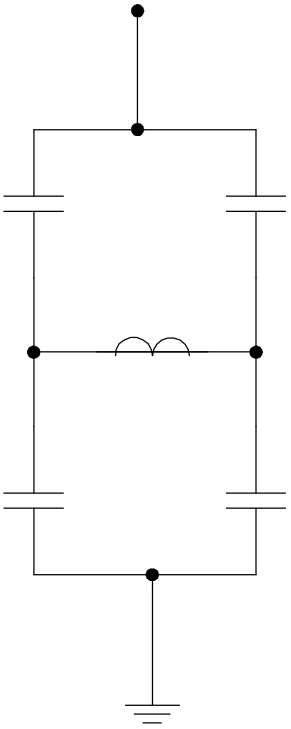


Figure G.1—Single-phase capacitor bank in “H” configuration

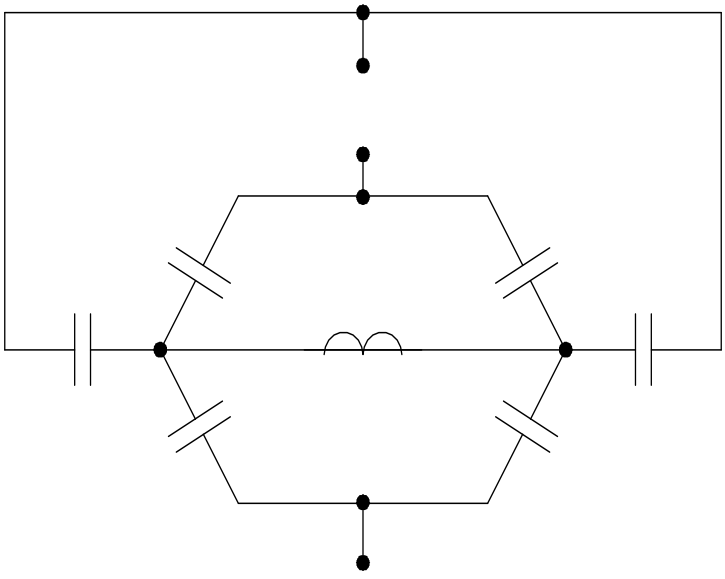


Figure G.2—Three-phase capacitor banks with neutral unbalance protection (double Y)

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.3.1.2 Particular service stresses

In case of a flashover across one of the capacitor branches (see Figure G.3 and Figure G.4), a high frequency discharge current, that may reach several kA at several kHz, will flow in the primary winding of the unbalance current transformer. This discharge current is due to the failure of the adjacent capacitor branch.

Because of the following factors:

— The high leakage inductance of the primary winding L_{air} in saturated mode

— The high frequency

— The high value of the discharge current

The corresponding voltage developed across the primary terminals can be quite significant.

The expression for the primary winding terminal voltage is shown in Equation (G.1).

$$U_{peak} = 2 \times \pi \times f_{discharge} \times L_{air} \times I_{discharge} \quad \text{(G.1)}$$

where:

U_{peak}: voltage across primary terminal during fault in volts
$f_{discharge}$: frequency of the discharge (fault) current in Hz
L_{air}: leakage inductance in saturated mode of the primary winding in Henry[34]
$I_{discharge}$: peak discharge (fault) current in amperes

[34] The leakage inductance of the primary winding in saturated mode can be approximated by using 1.0 μH/m of primary winding length.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

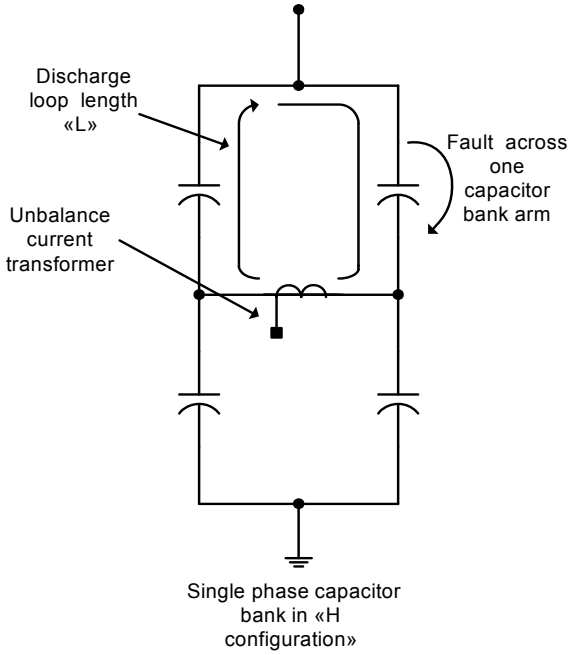


Figure G.3—Fault representation for a single-phase capacitor bank in "H" configuration

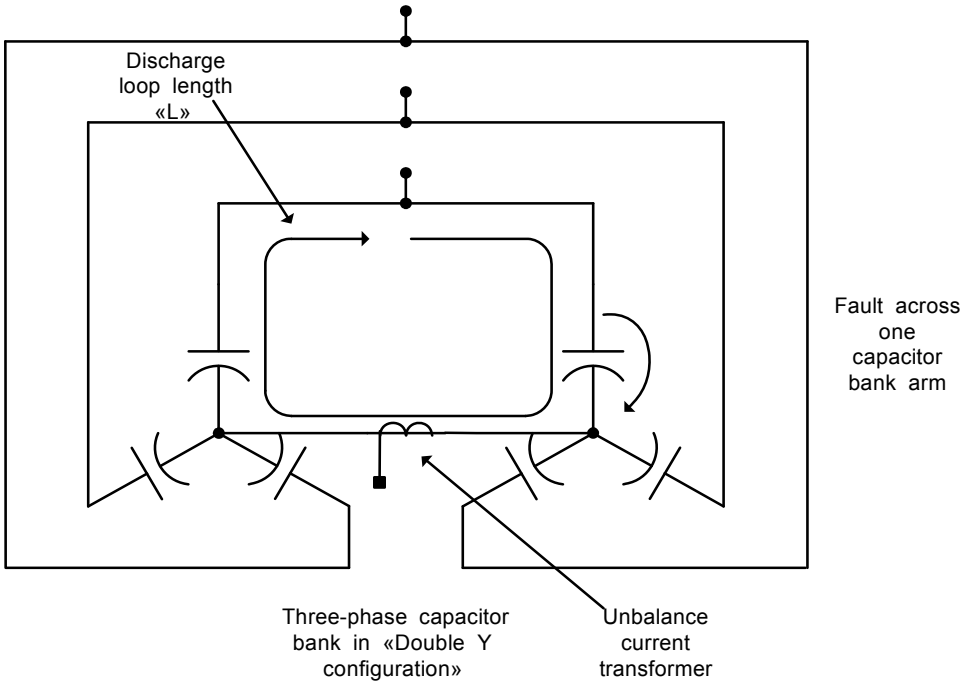


Figure G.4—Fault representation for a three-phase capacitor bank in "double Y" configuration

The discharge current parameters can be estimated by using Equation (G.2) and Equation (G.3):

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

$$I_{discharge} = \frac{U_{SIPLB}}{\sqrt{L_{loop} / C_{arm}}} \quad \text{(G.2)}$$

$$f_{discharge} = \frac{1}{2 \times \pi \times \sqrt{L_{loop} \times C_{arm}}} \quad \text{(G.3)}$$

where:

$I_{discharge}$: peak discharge (fault) current in amperes,
U_{SIPLB}: protective level of the capacitor bank arm under switching impulse conditions in volts,
L_{loop}: inductance of the discharge loop (≈ 1 μH/m) + leakage inductance of the primary winding in saturated mode in henry,
C_{arm}: Capacitance of the unfaulted capacitor bank arm in farads,
$f_{discharge}$: frequency of the discharge (fault) current in hertz.

The user and/or the capacitor bank manufacturer shall provide to the current transformer manufacturer the following information in order to calculate the appropriate current transformer insulation level between primary terminals and the electrical characteristics of the voltage limiting device:

a) Single line diagram of the capacitor bank

b) Position of the unbalance current transformer within the capacitor bank

c) Physical dimensions (outline drawings) of the capacitor bank and interconnection busbars (for the determination of L_{loop})

d) Rated capacitance of the capacitor bank arms (for the determination of C_{arm})

e) Substation switching surge protective level given by the surge arresters (for the determination of U_{SIPL})

The following gives a calculation example of the calculation:

— System voltage: 245 kV ϕ-ϕ

— System frequency: 60 Hz

— Capacitor bank rated reactive power: 205 Mvar (3ϕ reactive power)

— Type of connection: H connection

— Rated capacitance per arm (C_{arm}): 9.059 μF

— Location of the unbalance current transformer: In the center of the H connection

— Location of the center H arm in relation with the capacitor bank: At the mid-point of the series connected capacitor units

— Length of the discharge loop (to determined L_{loop}): 30 meters

— Maximum switching surge protective level of the substation surge arresters (U_{SIPL}): 410 kV peak

— Leakage inductance of the current transformer primary winding in saturated mode (L_{air}): 200 μH

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

— Residual voltage of the surge arrester (U_{res}, voltage limiting device): 40 kV peak

From these system parameters we can derive the following discharge current parameters:

— Inductance of the discharge loop (L_{loop}): 30 meters x 1μH/m =30 μH

— Equivalent maximum switching surge protective level of each capacitor bank arm: 410 kV / 2 = 205 kV peak (the factor 2 is used because the center of the H arm is located at the mid-point of the series connected capacitor units)

— Discharge current ($I_{discharge}$): $\frac{205\,\text{kV}}{\sqrt{(30\,\mu\text{H}+200\,\mu\text{H})/9.059\,\mu\text{F}}} = 40.7\,\text{kA}$

— Discharge current frequency ($f_{discharge}$): $\frac{1}{2\times\pi\times\sqrt{(30\,\mu\text{H}+200\,\mu\text{H})\times 9.059\,\mu\text{F}}} = 3.49\,\text{kHz}$

— Voltage across current transformer primary terminals during fault (U_{peak}, if not protected by a voltage limiting device): $2\times\pi\times 3.49\,\text{kHz}\times 200\,\mu\text{H}\times 40.7\,\text{kA} = 178.5\,\text{kV}$

— Energy to be dissipated in the arrester (W):

$$\tfrac{1}{2}\times 9.059\,\mu\text{F}\times(205\,\text{kV}-40\,\text{kV})^2 = 123.3\,\text{kJ}$$

The values shown above are conservative. In this example, the effective resistance of the discharge loop at the discharge frequency as well as the effect of the equivalent resistance of the fault (e.g., arcing resistance) have not been considered. Considering the relatively high frequency of the discharge current, the current will be damped and the actual discharge current peak can be as low as 50% from the value calculated above and the energy dissipated in the voltage limiting device will also be less than 50% of the above value. Considering that the effect of the resistances can not be neglected in certain cases, it is highly recommended to simulate each particular case with the use of a system simulation program.

G.3.1.3 Mitigation measures

It is normally uneconomical to design the primary insulation (between turns) to withstand the maximum voltage that can occur across the primary winding.

The use of the voltage limiting devices such as zinc oxide arrester or spark gap across the primary terminals has been a common solution, which limits the voltage developed in the event of a failure of capacitor branch in the capacitor bank.

Both solutions consist of limiting the voltage across the primary terminals of an unbalance current transformer in case of a dielectric failure across a capacitor branch of the capacitor bank.

It should be noted that the use of zinc oxide arrester is limited by its own energy withstand capability. The energy that will be dissipated in the arrester can be conservatively estimated by the Equation (G.4). [35]

[35] A more accurate calculations can be done by a system simulation program taking into account the energy dissipated in the fault and in the effective resistance at discharge frequency in the discharge loop.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

$$W = \tfrac{1}{2} \times C_{arm} \times \left(U_{SIPL} - U_{res}\right)^2 \quad \text{(G.4)}$$

where:

W: energy to be dissipated in the arrester in joules,
C_{arm}: capacitance of the healthy capacitor units in the branch in farads,
U_{SIPL}: protective level of the capacitor branch under switching impulse conditions in volts,
U_{res}: residual voltage of the surge arrester for the coordinating fault current in volts.

In some cases, for large Mvar capacitor banks, the energy level may lead to uneconomical zinc oxide arrester solutions because of the need of using several parallel columns. For such cases, a spark gap solution may be more appropriate.

For solutions using a spark gap, the spark gap design shall be such that the atmospheric conditions do not adversely affect its sparkover voltage. Effects of temperature variation, humidity, condensation, dust, snow and ice should be considered in the design. Protective cover may be needed.

Both solutions should be sufficiently robust to withstand several operations during service life. If a cooling time is needed between two consecutive discharges, the manufacturer shall state the minimum cooling time.

This particular type of unbalance protection current transformers shall be designed to withstand (between primary terminals) either the full voltage produced by the discharge current or the protective voltage level of the voltage limiting device.

G.4 Specific requirements

The clause numbering given in the following clauses refer to the main text clause numbering.

G.4.1 Insulation requirements

G.4.1.1 Voltage ratings, dielectric test levels and prescribed extinction voltages

Subclause 4.1.1 applies for the phase to ground insulation. The associated system voltage rating shall be based on the particular location of the unbalance current transformer i.e., in the mid-point for an H configuration or in the isolated neutral for a “double Y” configuration. For H and ungrounded neutral “double Y” configurations, it is typical to specify a voltage rating for the unbalance current transformer of, at least, half of the system voltage.

In addition, to the phase to ground insulation levels, a rated lightning impulse voltage shall be specified across the primary terminals.

The rated lightning impulse voltage across primary terminals shall be 1.3 times the maximum protective level of the voltage limiting device i.e., ZnO arrester or spark gap.

Where there is no voltage limiting device connected across the primary terminals of the unbalance current transformer, the rated lightning impulse voltage across primary terminals shall be 1.3 times the maximum transient voltage level that can appear in case of capacitor bank fault.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.4.1.2 Capacitance and dissipation factor requirements

See 4.1.2.

G.4.1.3 Creepage distance requirements

See 4.1.3.

G.4.1.4 External Radio influence voltage (RIV) requirements

See 4.1.4.

G.4.1.5 Routine partial discharge test

See 4.1.5.

G.4.1.6 Insulation resistance requirements

See 4.1.6.

G.4.1.7 Power frequency voltage withstand test

See 4.1.7.

G.4.1.8 Duration of power frequency voltage withstand test for test frequency higher than 120 Hz

See 4.1.8.

G.4.2 Mineral oil requirements

See 4.2.

G.4.3 Requirements for accuracy and accuracy calibration systems

See 4.3.

G.4.4 Mechanical performance requirements

See 4.4, 4.4.1, and 4.4.2.

G.4.5 Thermal performance requirements

See 4.5.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.4.6 Ground shield requirements

See 4.6.

G.4.7 Dissolved gas and water content requirements for new oil-immersed transformers

See 4.7.

G.4.8 Endurance capability for fast high voltage transient

In general, 4.8 does not apply since the rated voltage of unbalance current transformers is lower than 345 kV.

G.4.9 Performance of internal arc protection

Subclause 4.9 applies if such performance is specifically required.

G.4.10 Identification of test sample in the type test report

See 4.10.

G.4.11 Secondary short-circuit for voltage transformers

Subclause 4.11 does not apply.

G.5 Test conditions

All tests shall be performed without the voltage limiting device (see Clause 5).

G.6 Classification of tests

See Clause 6.

G.6.1 Routine tests and test sequences

Subclauses 6.1, 6.1.1, and 6.1.2 apply. In addition to the tests listed in 6.2.1, a lightning impulse test across primary terminals has to be performed before the partial discharge test. Sublclause 6.1.3 is not applicable.

G.6.2 Type tests and test sequences

Subclauses 6.2, 6.2.1, 6.2.2, 6.2.3, and 6.2.4 apply. In addition to the tests listed in 6.1.1, a lightning impulse test across primary terminals has to be performed before the partial discharge test.

G.6.3 Special tests

With the exception of the endurance chopped wave test, 6.3 is applicable.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.7 Routine test procedures

G.7.1 Verification of terminal markings and polarity

See 7.1.

G.7.2 Capacitance and dissipation factor test

See 7.2.

G.7.3 Applied voltage test on secondary windings

See 7.3.

G.7.4 Insulation resistance test on windings

See 7.4.

G.7.5 Lightning impulse voltage test on the primary winding

Subclause 7.5 applies for the phase-to-ground insulation.

G.7.5.1 Determination of sample size

Subclause 7.5.1 applies.

G.7.5.2 Test procedure and criteria

Subclause 7.5 applies for the phase-to-ground insulation.

G.7.5.3 Lightning impulse voltage test across primary terminals

Current transformers used for unbalance current detection of capacitor banks shall be subjected to an impulse routine test between its primary terminals.

This test is only applicable if the maximum protective level of the voltage limiting device or if the transient voltage that can appear across the primary terminals during a capacitor bank fault is greater than $\sqrt{2}$ times the peak value of the inter-turn over-voltage test.

Three (3) impulses of negative polarity shall be applied on each primary terminal with the other terminal solidly grounded or grounded through a suitable low resistance measuring shunt. The secondary terminals may be short-circuited or loaded with a resistive burden up to its assigned value.

The impulse test level shall be 130% of the maximum protective level of the voltage limiting device or 130% of maximum peak voltage that can appear across the primary terminals if non-protected.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Because of the low inductance of the primary winding, an impulse having a shorter t_2 time than the prescribed minimum time t_2 (i.e., 40 μs) is acceptable provided that the minimum capacitance used in the impulse generator is equal to or greater than 3.0 μF.

NOTE 1—For obtaining the minimum required impulse generator capacitance, the use of parallel stages within the impulse generator is generally needed.

NOTE 2—In order to get a longer t_2 time, it is permissible to load the secondary winding up to the assigned burden. If such a procedure is used, care should be exercised to not exceed the voltage withstand capability of the secondary winding due to transmitted overvoltage.

The transformer shall be considered as having met the requirements if:

a) Neither external nor internal disruptive discharge is observed

b) No audible noise is noted from the transformer

c) No deviation is detected between the reduced wave and full wave oscillograms and/or between full wave oscillograms (see NOTE)

NOTE—It may happen that small deviations are observed between reduced wave and full wave oscillograms. If this is the case, comparison between the first and the other full wave oscillograms may be used to insure that the deviations observed when using the reduced wave oscillograms are solely caused by the different voltage level and corresponding non-linearities in the test circuit and/or measuring circuit.

G.7.6 Power frequency voltage withstand test

Subclause 7.6 applies.

G.7.7 Partial discharge test

Subclause 7.7 applies.

G.7.8 Dissolved gas and water content analysis for oil-immersed transformers (of a nominal system voltage of 345 kV and above)

In general, 7.8 does not apply since the rated voltage of unbalance current transformers is lower than 345 kV.

G.7.9 Sealing test

See 7.9.

G.7.10 Ground shield check

See 7.10.

G.7.11 Tests on the mineral oil

See 7.11.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.8 Routine test procedures (applicable to current transformers)

G.8.1 Inter-turn over-voltage test

See 8.1.1.

G.8.2 Accuracy test for the metering rated current transformers

See 8.2.

G.8.3 Resistance measurement of relaying rated secondary windings

See 8.3.

G.8.4 Performance characteristics of relaying rated current transformers

See 8.4.

G.9 Routine test procedures (applicable to voltage transformers)

Clause 9 does not apply.

G.10 Type test procedures

G.10.1 Dissolved gas and water content analysis

See 10.1.

G.10.2 Mechanical test

See 10.2.

G.10.3 Lightning impulse voltage test on the primary winding

Subclause 10.3 applies for the phase-to-ground insulation.

G.10.4 Lightning impulse voltage test across primary terminals

Current transformers used for unbalance current detection of capacitor banks shall be subjected to an impulse type test between its primary terminals.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

This test is only applicable if the maximum protective level of the voltage limiting device or if the transient voltage that can appear across the primary terminals during a capacitor bank fault is greater than √2 times the peak value of the inter-turn over-voltage test.

Fifteen (15) impulses of each polarity shall be applied on each primary terminal with the other terminal solidly grounded or grounded through a suitable low resistance measuring shunt. The secondary terminals may be short-circuited or loaded with a resistive burden up to its assigned burden.

The impulse test level shall be 130% of the maximum protective level of the voltage limiting device or 130% of maximum peak voltage that can appear across the primary terminals if non-protected.

Because of the low inductance of the primary winding, an impulse having a shorter t_2 time than the prescribed minimum time t_2 (i.e., 40 μs) is acceptable provided that the minimum capacitance used in the impulse generator is equal to or greater than 3.0 μF.

NOTE 1—For obtaining the minimum required impulse generator capacitance, the use of parallel stages within the impulse generator is generally needed.

NOTE 2—In order to get a longer t_2 time, it is permissible to load the secondary winding up to the assigned burden. If such a procedure is used, care should be exercised to not exceed the voltage withstand capability of the secondary winding due to transmitted overvoltage.

The transformer shall be considered as having met the requirements if

a) The number of external disruptive discharges is not more than two for the sequence of each polarity

b) No deviation is detected between the reduced wave and full wave oscillograms and/or between full wave oscillograms (see NOTE)

c) No audible noise is noted from the transformer during the test

d) No internal disruptive discharge is observed

NOTE—It may happen that small deviations are observed between reduced wave and full wave oscillograms. If this is the case, comparison between the first and the other full wave oscillograms may be used to insure that the deviations observed when using the reduced wave oscillograms are solely caused by the different voltage level and corresponding non-linearities in the test circuit and/or measuring circuit.

G.10.4.1 Switching impulse voltage test on the primary winding —wet

In general, 10.4 does not apply since the rated voltage of this type of current transformers is lower than 345 kV.

G.10.5 External Radio influence voltage (RIV) test

See 10.5.

G.10.6 Power frequency voltage withstand test —wet

See 10.6.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.10.7 Power frequency voltage withstand / partial discharge test —dry

See 10.7.

G.10.8 Temperature rise test

Subclause 10.8 generally applies.

Nevertheless, these current transformers have a low rated continuous current (e.g., 5 A rms to 10 A rms) and the current densities in primary and secondary windings are also very low because the dimensioning factor for the winding cross-sections is the short-circuit current that is, in general, more than 40 times the rated current. Temperature rises of such devices are generally in the order of 10°C or less.

Instead of performing a heat run test, manufacturers may provide calculations of the expected temperature rises. These calculations shall be based on previous heat run tests performed on similar unit(s).

G.10.9 Short-time mechanical and thermal rating test

See 10.9.

G.10.10 Accuracy performance test

Subclause 10.10 applies. In addition a measurement of the leakage inductance of the primary winding in saturated mode may be performed.

G.10.11 Creepage distance measurement

See 10.11.

G.10.12 Sealing system test for gas-filled instrument transformers

See 10.12.

G.11 Type test procedure (applicable to current transformers)

G.11.1 Secondary open-circuit voltage withstand test

See 11.1.

G.12 Special test procedures

G.12.1 Endurance chopped wave test

In general, 12.1 does not apply since the rated voltage of unbalance current transformers is lower than 345 kV.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.12.2 Internal arc test

Subclause 12.2 applies if such performance and test have been specifically required.

G.12.3 Seismic qualification

See 12.3.

G.13 Identification of test sample in the type test report

See Clause 13.

G.14 Tests on voltage limiting devices

Zinc oxide arresters shall be routine and type tested according to IEEE Std C62.11-2005. Tests on spark gaps are not covered by any standards and should be agreed upon between manufacturer and user. For spark gaps, atmospheric conditions should be taken into account in the test program.

G.15 Test code

Annex A is applicable with the exception of A.3.

G.16 Dielectric tests performed at an altitude of 1000 m or less for instrument transformers designed for installation at altitudes greater than 1000 m

See Annex B.

G.17 Dielectric tests, oil sampling and other related measurements in the field

See Annex C.

G.18 Internal arc protection for instrument transformers

Annex D is applicable if such performance and test have been specifically required.

G.19 Validity of type test reports and guidance for reviewing the design comparison report for the modified design

See Annex E.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

G.20 Rated voltage factor

See Annex F.

G.21 Current transformers having transient performance requirements

Annex H is not applicable.

G.22 Electrical endurance test, explanatory note

See Annex I.

G.23 Bibliography

Annex J is applicable.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex H

(informative)

Current transformers having transient performance requirements

IEEE standards do not cover current transformers having transient performance requirements. These current transformers are normally built with air gaps within the magnetic circuit to prevent or delay the saturation of the magnetic core under asymmetrical fault current and to provide an accurate measurement of the AC and DC components of the fault current up to a certain specified time. Some utilities in North America are requesting such transient performance and do specify this type of current transformers (class TPS, TPX, TPY, or TPZ) according to IEC 60044-6-1992 [B15]. Class TPY is the most common in use. If such requirement is needed within the scope of this standard, it is recommended to follow the accuracy class requirements and accuracy testing methods outlined in IEC 60044-6-1992.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex I

(informative)

Electrical endurance test, explanatory note

This test is intended to simulate voltage stresses produced by the operation of a disconnector located in the vicinity of an instrument transformer.

During such an operation, the disconnector is trying to clear the capacitive current of an open-circuit bus bar. The disconnector is continuously restriking (one restrike per half–cycle) until the air-gap between the disconnector contacts is sufficient to withstand the recovery voltage (source side voltage + trap dc voltage on open busbar). The restriking duration may be up to 1 s (e.g., up to 120 transient voltage applications per single disconnector operation)

For each of the restrikes, the transient voltage applied to the instrument transformer is typically going from one polarity of the surge arrester protective level to the same level but to the opposite polarity. The resultant transient seen by the instrument transformer is approximately a voltage excursion of 2 times the protective level of the surge arrester. The instrument transformer should be designed to withstand such transient voltages with a certain safety margin. Its withstand level should be slightly over the surge arrester protective level. A minimum margin of 15% seems to be reasonable if we consider a certain aging over the years.

Table I.1—Typical protective levels

Maximum system voltage (kV)	Typical BIL level (LIWL) (kV)	Chopped-wave level (1.15 x BIL) (kV)	Typical voltage excursion during chopped-wave test* (kV)	Typical switching surge protective level (SIPL) (kV)	Typical voltage excursion in service during a disconnector operation (2 x SIPL) (kV)	Suggested minimum margin (%)	Test level in % of the BIL level (%)
362	1175	1350	1755	501	1002	15	75
550	1550	1785	2321	706	1412	15	81
800	2100	2420	3146	1071	2142	15	90

*Based on a 30% undershoot level.

Based on the above data, a uniform test level for the electrical endurance test of 80% of the rated BIL level has been specified in this standard.

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.

Annex J

(informative)

Bibliography

[B1] ASTM Book, Section 10-1992 Volume 10.2 Electrical Insulation (II).

[B2] ASTM Book, Section 10-1992 Volume 10.3 Electrical Insulating Liquids.

[B3] ASTM D1868-07, Standard Test Method for Detection and Measurement of Partial discharge (Corona) Pulses in Evaluation of Insulation Systems.

[B4] CAN/CSA-C50052-99(R2003), Cast Aluminum Enclosures for Gas-filled High-voltage Switchgear and Controlgear.[36]

[B5] CAN/CSA-C C50064-89 (R2003), Wrought Aluminum and Aluminum Alloy Enclosures for Gas-filled High-voltage Switchgear and Controlgear.

[B6] CAN/CSA-C50068-99(R2003) Wrought Steel Enclosures for Gas-filled High-voltage Switchgear and Controlgear.

[B7] CAN/CSA-C50069-89 (R2003), Welded Composite Enclosures of Cast and Wrought Aluminum Alloys for Gas-filled High-voltage Switchgear and Controlgear.

[B8] CAN/CSA-C62155-06, Hollow Pressurized and Unpressurized Ceramic and Glass Insulators for use in Electrical Equipment

[B9] EN 50052-1986, Cast Aluminum Alloy Enclosures for Gas-filled High-voltage Switchgear and Controlgear.[37]

[B10] EN 50064-1989, Wrought Aluminum and Aluminum Allow Enclosures for Gas-Filled High-voltage Switchgear and Controlgear.

[B11] EN 50068-1991, Wrought Steel Enclosures for Gas-filled High-voltage Switchgear and Controlgear.

[B12] EN 50069-1991, Welded Composite Enclosures of Cast and Wrought Aluminum Alloys for Gas-filled High-voltage Switchgear and Controlgear.

[B13] EPRI Publication, “Workshop-Failed High-voltage Instrument Transformers,” Palo Alto, CA, September 24-26, 1990.

[B14] EPRI Publication Proceedings, “High-voltage Current Transformers & Bushings: Failure prediction and Prevention,” Palo Alto, CA September 1999, TR-1113649.

[B15] IEC 60044-6:1992, Instrument Transformers—Part 6: Requirements for Protective Current Transformers for Transient Performance.

[B16] IEC 61181:2007, Mineral Oil-Filled Electrical Equipment—Application of dissolved Gas Analysis (DGA) to Factory Tests on Electrical Equipment.

[B17] IEEE C57.19.100™-1995, IEEE Guide for Application of Power Apparatus Bushings.

[36] CAN/CSA publications are available from the Sales Department of the Canadian Standards Association, 5060 Spectrum Way, Suite 100, Mississauga, ON, L4W 5N6, CANADA, (http://www.csa.ca/).

[37] EN publications are available from European Committee for Standardization, Avenue Marnix 17, B-1000, Brussels, Belgium, (http://www.cen.eu).

Copyright © 2009 IEEE. All rights reserved.

Copyrighted material licensed to Pattaraporn Sritrakool on 2015-04-08 for licensee's use only. Copyrighted and Authorized by IEEE. Restrictions Apply.