DRAFT INTERNATIONAL STANDARD ISO/IEC 14908-3

Attributed to ISO/IEC JTC 1 by the Central Secretariat (see page iii)

Voting begins on	Voting terminates on
2007-12-21	**2008-05-21**

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОММИСИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

FAST-TRACK PROCEDURE

Open Data Communication in Building Automation, Controls and Building Management — Control Network Protocol —

Part 3: Power Line Channel Specification

Communication de données ouverte en immotique, contrôles et gestion d'immeuble -- Protocole de réseau de contrôle —

Partie 3: Spécification de canal de courants porteurs

ICS 35.200; 35.240.99

In accordance with the provisions of Council Resolution 21/1986 this DIS is circulated in the English language only.

Conformément aux dispositions de la Résolution du Conseil 21/1986, ce DIS est distribué en version anglaise seulement.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

© International Organization for Standardization, 2007
© International Electrotechnical Commission, 2007

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

--`,,```,,,,````-`-`,,`,,`,`,,`---

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

© ISO/IEC 2007 — All rights reserved

Not for Resale

NOTE FROM ITTF

This draft International Standard is submitted for JTC 1 national body vote under the Fast-Track Procedure.

In accordance with Resolution 30 of the JTC 1 Berlin Plenary 1993, the proposer of this document recommends assignment of ISO/IEC 14908-3 to JTC 1/SC 25.

"FAST-TRACK" PROCEDURE

1 Any P-member and any Category A liaison organization of ISO/IEC JTC 1 may propose that an existing standard from any source be submitted directly for vote as a DIS. The criteria for proposing an existing standard for the fast-track procedure are a matter for each proposer to decide.

2 The proposal shall be received by the ITTF which will take the following actions.

2.1 To settle the copyright and/or trade mark situation with the proposer, so that the proposed text can be freely copied and distributed within JTC 1 without restriction.

2.2 To assess in consultation with the JTC 1 secretariat which SC is competent for the subject covered by the proposed standard and to ascertain that there is no evident contradiction with other International Standards.

2.3 To distribute the text of the proposed standard as a DIS. In case of particularly bulky documents the ITTF may demand the necessary number of copies from the proposer.

3 The period for combined DIS voting shall be six months. In order to be accepted the DIS must be supported by 75 % of the votes cast (abstention is not counted as a vote) and by two-thirds of the P-members voting of JTC 1.

4 At the end of the voting period, the comments received, whether editorial only or technical, will be dealt with by a working group appointed by the secretariat of the relevant SC.

5 If, after the deliberations of this WG, the requirements of 3 above are met, the amended text shall be sent to the ITTF by the secretariat of the relevant SC for publication as an International Standard.

If it is impossible to agree to a text meeting the above requirements, the proposal has failed and the procedure is terminated.

In either case the WG shall prepare a full report which will be circulated by the ITTF.

6 If the proposed standard is accepted and published, its maintenance will be handled by JTC 1.

© ISO/IEC 2007 – All rights reserved

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Contents

Page

Foreword 3

Introduction 4

1 Scope 5

2 Normative references 5

3 Terms and definitions 5

4 General description 6
4.1 Electrical safety 6
4.2 Functional partitioning of PL specification 6

5 Power Line Medium specifications 6
5.1 Power 6
5.2 Data channel 6
5.3 Physical and electrical specifications 7
5.4 Connectors and coupling 7
5.5 Signal coupling between phases 7
5.6 Surge protection and related devices 7

6 PL Node specifications 7
6.1 Compliance 7
6.2 Interface to MAC sub-layer 8
6.3 Word encoding 8
6.4 PL packet timing 8
6.5 Transmitter characteristics 9
6.5.1 Carrier modulation 9
6.5.2 Waveform amplitude 9
6.5.3 Device coupling 10
6.5.4 Single phase coupling 10
6.5.5 Multiple phase coupling 10
6.6 Receiver characteristics 10
6.6.1 Receive mode effective input impedance 10
6.6.2 Receiver performance 11
6.6.3 Receiving on a quiet line 12
6.6.4 Receiving with interference 12
6.6.5 Receiving through a distorted channel 14
6.6.6 Receiving with impulsive noise 14

Bibliography 16

--`,,```,,,,````-`-`,,`,,`,`,,`---

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Foreword

This document (EN 14908-3:2006) has been prepared by Technical Committee CEN/TC 247 “Building Automation, Controls and Building Management”, the secretariat of which is held by SNV.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2007, and conflicting national standards shall be withdrawn at the latest by May 2007.

This European Standard is part of the standard EN 14908 *Open Data Communication in Building Automation, Controls and Building Management — Control Network Protocol* and consists of the following parts:

Part 1: Protocol Stack

Part 2: Twisted Pair Communication

Part 3: Power Line Channel Specification

Part 4: IP Communication

Part 5: Implementation Guideline

The content of this European Standard covers the data communications used for management, automation/control and field functions. This standard is based on the American standard ANSI-709.2-A-2000 Control Network Powerline Channel Specification but with extensive changes to meet European requirements in respect of the topology and nature of electrical distribution networks, limitations on radio frequency emissions and requirements to use powerline access protocols.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Introduction

This European Standard specifies the Control Network Power Line (PL) Channel and serves as a companion document to EN 14908-1. Its purpose is to present the information necessary for the development of a PL physical network and nodes to communicate and share information over that network. This is one of a series of documents covering the various media that comprise the CNP standard.

This European Standard covers the complete physical layer (OSI layer 1) including the interface to the Medium Access Control (MAC) Sub-Layer and the interface to the medium. It includes parameters specific to the PL channel type, even though the parameters may be controlled at an OSI layer other than layer 1. This European Standard also provides a set of guideline physical and electrical specifications for the power line environment as an aid in developing products for that environment.

This European Standard has been prepared to provide mechanisms through which various vendors of building automation, control and of building management systems may exchange information in a standardised way. It defines communication capabilities.

This European Standard is used by all involved in design, manufacture, engineering, installation and commissioning activities and has been made in response to the essential requirements of the Constructive Products Directive.

The CNP specification model is based on the OSI 7-layer model Reference Model. There are also important extensions to the OSI Reference Model. Figure 1 shows the scope of this specification in reference to the entire CNP model. In this European Standard, only the parts of the model relevant to power line communication are specified. Anything outside this boundary is covered in other parts of the standard. Similar specifications exist for other CNP media.

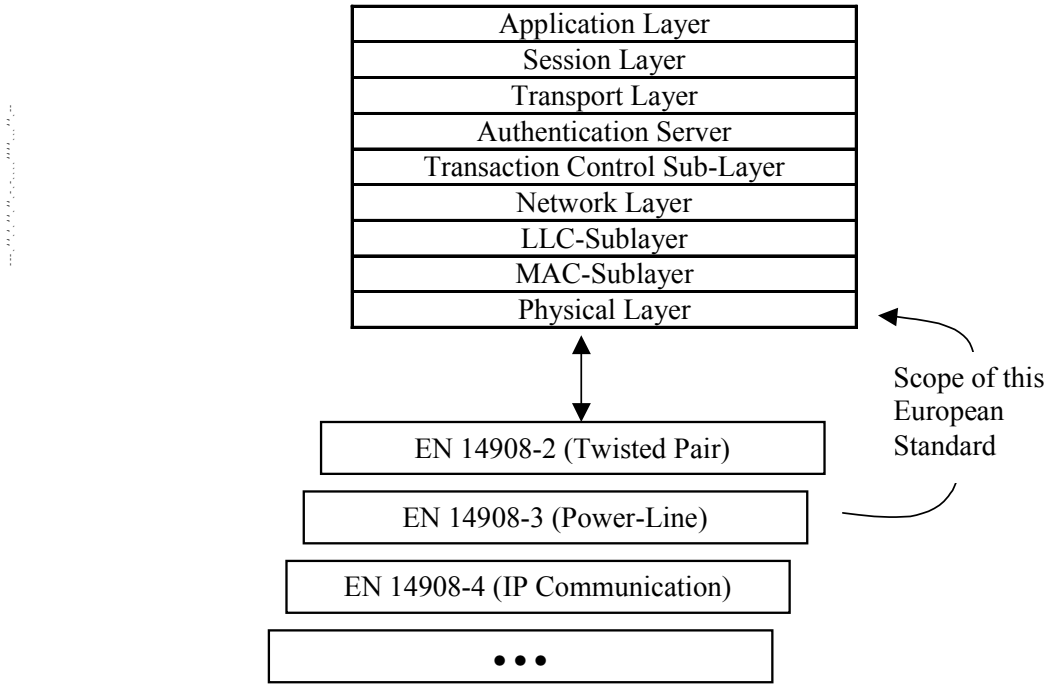


Figure 1 — Relationship of CNP 3 Specification to the CNP 1 Specification Model

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

1 Scope

This European Standard specifies all the information necessary to facilitate the exchange of data and control information over the power line medium.

This European Standard establishes a minimal set of rules for compliance. It does not rule out extended services to be provided, given that the rules are adhered to within the system. It is the intention of the standard to permit extended services (defined by users) to coexist.

Certain aspects of the standard are defined in other documents. These documents are referenced where relevant. In the case where a referenced standard conflicts with this European Standard, this European Standard will prevail.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 14908-1:2005, *Open Data Communication in Building Automation, Controls and Building Management – Control Network Protocol — Part 1: Protocol Stack*

EN 50065-1, *Signalling on low-voltage electrical installations in the frequency range 3 kHz to 148, 5 kHz — Part 1: General requirements, frequency bands and electromagnetic disturbances*

EN 50065-2-1, *Signalling on low-voltage electrical installations in the frequency range 3 kHz to 148,5 kHz — Part 2-1: Immunity requirements for mains communications equipment and systems operating in the range of frequencies 95 kHz to 148,5 kHz and intended for use in residential, commercial and light industrial environments*

EN 50065-2-2, *Signalling on low-voltage electrical installations in the frequency range 3 kHz to 148,5 kHz — Part 2-2: Immunity requirements for mains communications equipment and systems operating in the range of frequencies 95 kHz to 148,5 kHz and intended for use in industrial environments*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 14908-1:2005 and the following, specifically with the power line medium and physical layer shown in Figure 1, apply..

3.1
PL Node
user node attached to the power line medium at a tap that meets the requirements of this specification

3.2
Line Cord
cable not part of the power line network that allows a node located away from the power line network to be connected to the network

3.3
Power Line Network
communication network based on power distribution lines (“power lines”), from the final distribution transformer to and including all homes served by that transformer, including all wiring in those homes

3.4
Non-Network-Powered Node
compatible node that attaches to the power line network but does not draw any power from the network

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

4 General description

4.1 Electrical safety

This clause gives several recommendations related to safety concerns with respect to this European Standard.

This discussion is not complete, nor does it address all possible safety issues. The designer is urged to consult, among other things, the relevant local and national electrical codes for the country of intended use. Local codes may supplement national electrical codes and impose additional safety related requirements.

Products conforming to this European Standard shall be designed, constructed, assembled, tested and installed following recognised safety provisions appropriate to products covered by the standard.

Power line network cables are subject to at least five direct electrical safety hazards during their use:

- high-energy transients coupled into the power line network from external environmental sources;
- possible differences between safety grounds to which network components are connected;
- possible high voltages on neutral or ground wiring;
- possible open safety grounds;
- high short-circuit current levels available at interface.

These electrical safety hazards should be alleviated for the network to perform properly. In addition to provisions for properly handling these faults in an operational system, special measures should be taken to maintain the intended safety features during changes of an existing network.

All wire and wiring to which nodes connect should conform to wiring standards of the appropriate national code for the country of intended use and should have been inspected to comply with that code.

4.2 Functional partitioning of PL specification

This specification divides the complete power line environment into two basic parts: the powerline medium, and the node physical access specification.

The medium specification concerns the capabilities and properties of the physical medium. This encompasses such items as its bandwidth, frequency allocation, electrical and physical specifications, connectors etc.

The node physical access specification deals with the physical properties of that part of the node that makes contact with the medium. Also described is the interface between the physical layer and the symbol-encoding sub-layer.

5 Power Line Medium specifications

5.1 Power

The nodes should not rely on the line frequency for timing or synchronisation to perform communications. AC power may be used to power the interface and application needs of a node.

5.2 Data channel

The channel occupies bandwidth from 125 kHz to 140 kHz frequency band, as defined in EN 50065-1, as a Binary Phase Shift Keyed (BPSK) modulated carrier. This channel is used to send protocol messages

--`,,```,,,,````-`-`,,`,,`,`,,`---
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

containing control, status, configuration and diagnostic information. The rules established in the CNP Medium Access Control (MAC) Layers and above shall be followed. The signalling characteristics of the channel are described in Clause 6.

5.3 Physical and electrical specifications

Physical and electrical specifications for the PL medium are not formally given in this European Standard since: 1) the PL medium is assumed to already exist in any environment using power line communications and; 2) this specification lacks control over the installation of the power line medium, its physical properties, topology, or other devices connected to the medium.

5.4 Connectors and coupling

If a connector is used to attach a CNP node to the power line network (as opposed to a direct connection), then the connector shall meet the following requirements:

— the connector shall impose a negligible signal loss (less than 0,1 dB) from the power line network and the attached node;

— the connector shall not impose any signal or voltage loss (greater than 0,1 dB) to the power line network (with or without a node connected to the connector).

Single-phase power line node connectors are assumed to fit standard electrical outlets appropriate for the country of use and may or may not include a connection to the protective conductor of such outlets if present. Signalling shall only be between phase and neutral conductors and no functional connection shall be made to the protective conductor.

Multi-phase powerline nodes may use any of the connection schemes given in EN 50065-1 permitting signalling between all phases simultaneously and the neutral conductor or between any of the phase conductors individually and the neutral conductor. No functional connection shall be made to the protective conductor.

5.5 Signal coupling between phases

Signal coupling between phases in multi-phase installations may be achieved by using phase couplers according to EN 50065-4-1.

5.6 Surge protection and related devices

Certain surge protection and related frequency selective protection devices may be installed on the power network. These devices may attenuate the CNP channel waveform sufficiently to prevent operation in part or the entire network. Precautions should be taken such that the device chosen does not substantially attenuate the signals in the 125 kHz to 140 kHz range.

6 PL Node specifications

6.1 Compliance

PL nodes shall comply with the requirements of EN 50065-1 and with either EN 50065-2-1 or EN 50065-2-2 depending upon the intended field of application of the nodes.

PL nodes shall comply with the additional requirements given in Clause 5 and 6.2 to 6.6.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

6.2 Interface to MAC sub-layer

The data is passed from the MAC sub-layer to the PL transceiver in an 8 bit byte format containing a L2Hdr byte, the NPDU and a 16 bit CRC as described in 6.3, 6.4 and 6.5 of EN 14908-1:2005. The PL transceiver encodes each byte of data into an 11 bit word and adds a bit sync pattern, a word sync word, and an End-of-Frame consisting of two EndofPacket (EOP) words. The entire packet is shown below in Figure 2. The bit sync pattern consists of 24 bits of alternating "10". The word sync word is "11001111011". The EndofPacket word is "11100110011". The bit sync pattern provides clock timing information. The word sync pattern provides bit polarity and word boundary information.

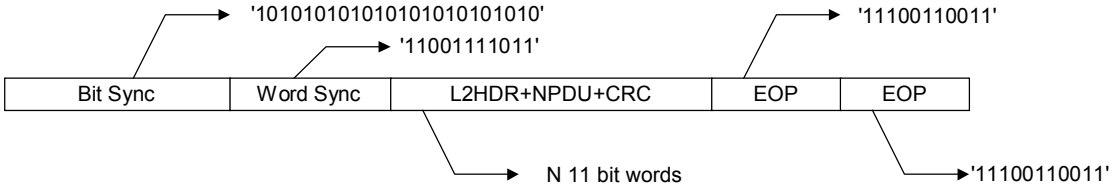


Figure 2 — Power Line Packet format

6.3 Word encoding

Each 8-bit byte in the L2Hdr, the NPDU and the CRC is encoded into an 11-bit word as follows. The first 8 bits of the 11-bit word are the 8 bits of data that are transmitted in NRZ format (uncoded). Bit 9 is an even parity bit P for the first 9 bits. Bits 10 and 11 are the last two bits and are always '01'. A data word is shown in Figure 3.




Figure 3 — 11-bit Word format

6.4 PL packet timing

As described in EN 14908-1, the protocol uses an interpacket spacing defined as a Beta1 time and randomising slots defined as Beta2 times. Beta1 is measured from the end of a packet to the beginning of the first Beta2 slot. The CNP protocol and PL transceiver in combination shall produce a Beta1 time of 3,4 ms ± 0,1 ms and B2 times of 2,0 ms ± 0,1 ms each. For optimum communication between nodes, there should be 8 priority Beta2 slots. In addition, the transceiver shall meet the timing parameters defined below and specified in Table 1.

Carrier Detect - The time from when the beginning of the packet is at the receiver's input until the receiver has detected carrier and caused P_Channel_Active to be set to true.

Transmit Start Delay - The time from when P_Data_request is activated to when the beginning of the packet is initiated onto the power line.

Table 1 — Transceiver timing specifications

Parameter	Specification
Carrier Detect	1,7 ms max.
Transmit Start Delay	100 us max.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale


6.5 Transmitter characteristics

6.5.1 Carrier modulation

The transmitter shall be a differential driver capable of driving the specified signal on the PL network. Each bit is sent as NRZ data BPSK modulated on to a carrier. The carrier frequency is 131,579 kHz with a tolerance of ±200 PPM. The symbol rate is 5 482,45 symbols/sec with a tolerance of ±200 PPM. Note that appropriate shaping shall be performed on the modulated waveform to meet the requirements in EN 50065-1 for conducted emissions.

6.5.2 Waveform amplitude

The amplitude of the carrier output voltage during packet transmission should be measured at 23 ºC ± 3 ºC using the test circuit shown in Figure 4. The V-network is an artificial network of (50 Ω//(50 µH+5 Ω)) conforming to 8.2.1 of CISPR 16. The amplitude is measured using the tuned receiver at a frequency of 131,5 kHz with a peak detector and a 30 kHz resolution bandwidth. The tuned receiver using its peak detector should read the rms value of a sinusoid. The amplitude limits shall be met both with switch closed and with the switch open. The transmit voltage will be calculated using the following formula $V_{pp}=2{,}828 \times V_{measured}$ and $dBV=20 \times \log_{10}(V_{measured})$. The transmit voltage $V_{measured}$ shall be greater than 0 dBV (2,828 V_{pp}) and less than 11 dBV (10,0 V_{pp}) when the switch is open and greater than –12 dBV (0,7 V_{pp}) when the switch is closed.

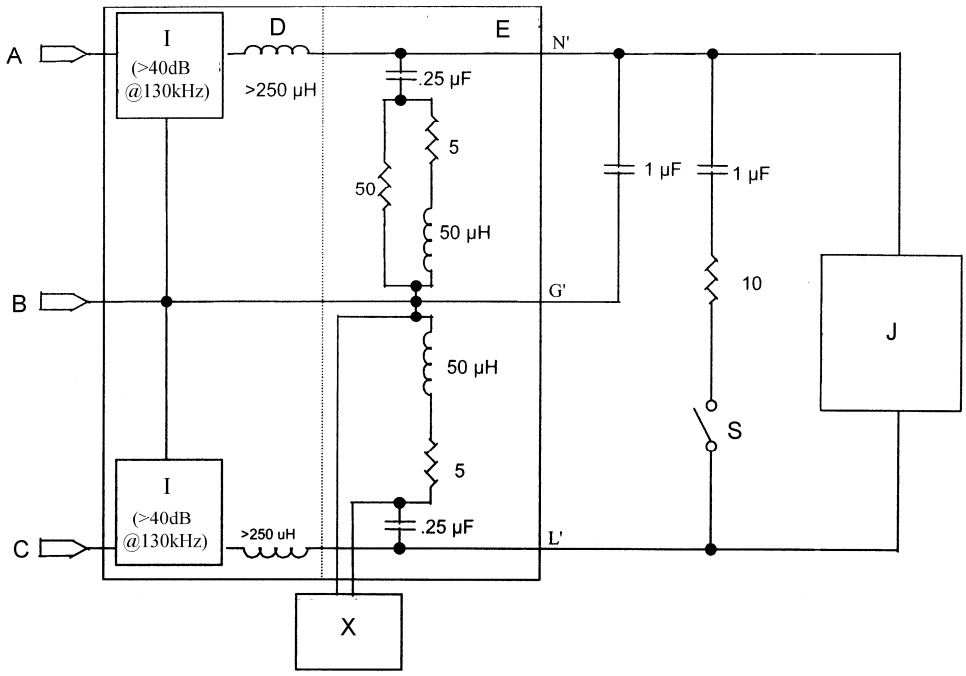

Key:

A Neutral
B Ground
C Line
D Filter
E V-Network
I Power line filter
J Power line transceiver under test
S Switch

Figure 4 — Test circuit for determining transmit amplitude

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

6.5.3 Device coupling

The devices will couple the control channel signal to the power line in various ways depending on which lines are available and what local electrical code restrictions apply.

6.5.4 Single phase coupling

A power line node shall only be coupled to phase and neutral conductors. No connection shall be made to the protective (earth) conductor for signalling purposes although such connection may be made for other protective or functional purposes.

6.5.5 Multiple phase coupling

If a power line node has access to more than one phase and neutral then any or all phases may be used to couple with respect to neutral as described in EN 50065-1. No connection shall be made to the protective (earth) conductor for signalling purposes although such connection may be made for other protective or functional purposes.


6.6 Receiver characteristics

6.6.1 Receive mode effective input impedance

The receive-mode effective input impedance shall be measured using the test circuit shown in Figure 5 and at an ambient temperature of 23 ºC ± 3 ºC. The V-network is an artificial network of (50 Ω//(50 μH+5 Ω)) conforming to 8.2.1 of CISPR 16. The receiver impedance is measured as follows. Set the signal generator to a sine wave of amplitude 5 V peak-to-peak at a frequency of 131,5 kHz. All measurements are made with a tuned receiver using a peak detector and a 30 kHz resolution bandwidth. The tuned receiver using its peak detector should read the rms value of a sinusoid. With the transceiver unplugged, measure the voltage (V_{oc}) on the V-network 50 Ω resistor (the signal generator provides this resistor with its internal termination) with the tuned receiver. The voltage V_{oc} should be 5,5 dBV ± 1 dB (5,3 V_{pp} ± 10 %) where dBV is defined as $dBV=20\times\log_{10}(V_{pp}/2{,}828)$. Next, with the transceiver plugged in and powered up in receive mode measure the voltage (V_{ic}) on the V-network 50 Ω resistor. The effective receive input impedance is calculated with the following formula where Z_e is the effective receiver input impedance, Z_n is a constant value of 29, V_{oc} and V_{ic} are the two voltages measured as described above (they shall be corrected for the 1/10 divider). The calculated value for Z_e shall be greater than or equal to 200.

$$Z_e \equiv 50\times V_{ic}\times\frac{Z_n}{V_{oc}(50+Z_n)-V_{ic}(50+Z_n)} \quad (1)$$

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

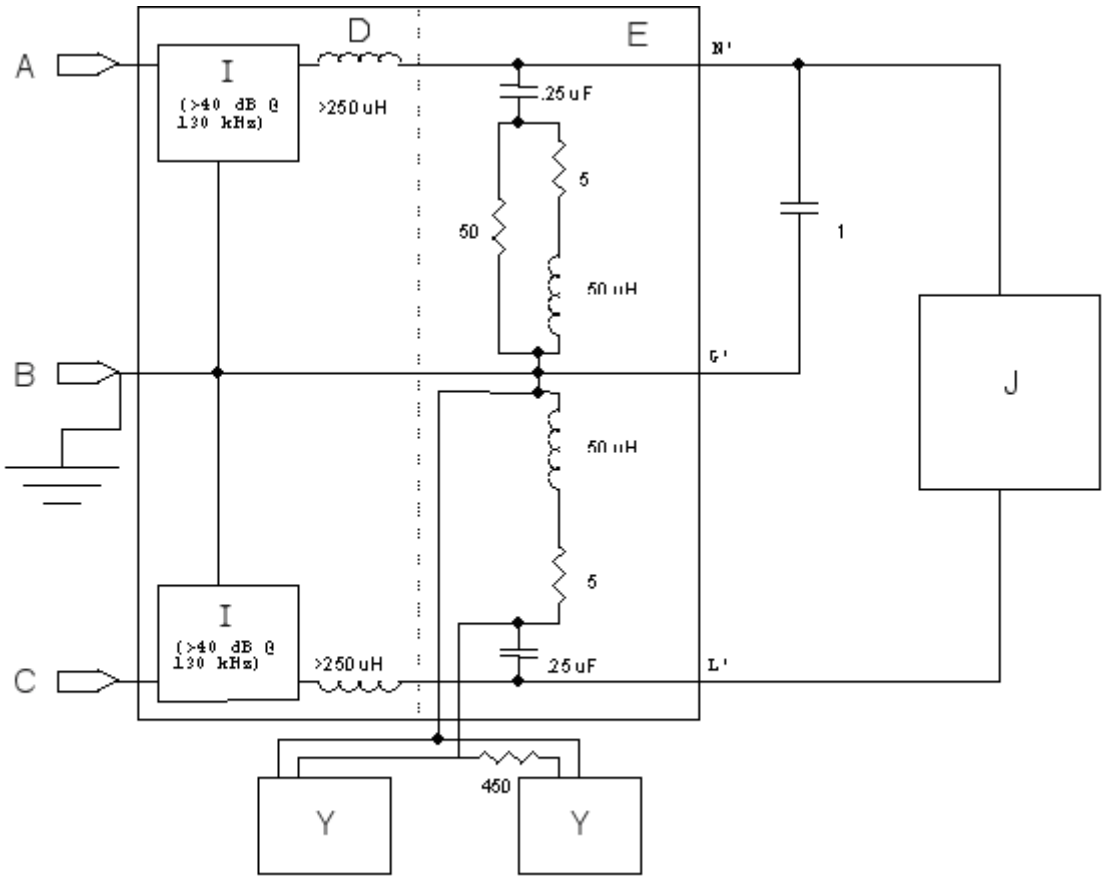

Key

A	Neutral	E	V-Network
B	Ground	I	Power line filter
C	Line	J	Power line transceiver under test
D	Filter	Y	Signal Generator(50 Ω)

Figure 5 — Test circuit for determining effective receiver impedance

6.6.2 Receiver performance


There are four receiver performance specifications. The performance is measured under various conditions as described in the following sections for each of the four tests. The performance metric used is packet error rate (PER%) which is defined by the equation below where P_r is packets received and P_s is packets sent. The number of packets sent (P_s) shall be more than 1 000.

$$\mathrm{PER}\% = 100 \times \left(1 - \frac{P_r}{P_s}\right) \tag{2}$$

The test circuit for all of the receiver performance tests is shown in Figure 6. The V-networks shown shall conform to the same standard as described in 6.6.1. The tuned receiver should be using a peak detector, a resolution bandwidth of 10 kHz (10 kHz is wide enough to encompass the power line signal and is a commonly available filter bandwidth in standard measuring equipment) and a video bandwidth of 30 Hz. The tuned receiver using its peak detector should read the rms value of a sinusoid. Note that the tuned receiver is measuring 1/10 of the actual voltage on the 50 Ω resistor of the V-network. When a test does not use the

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

signal generator's output care shall be taken to insure that the 50 Ω termination is still present. In this case, the signal generator can be either set to 0 amplitude or can be removed and replaced with a 50 Ω termination.

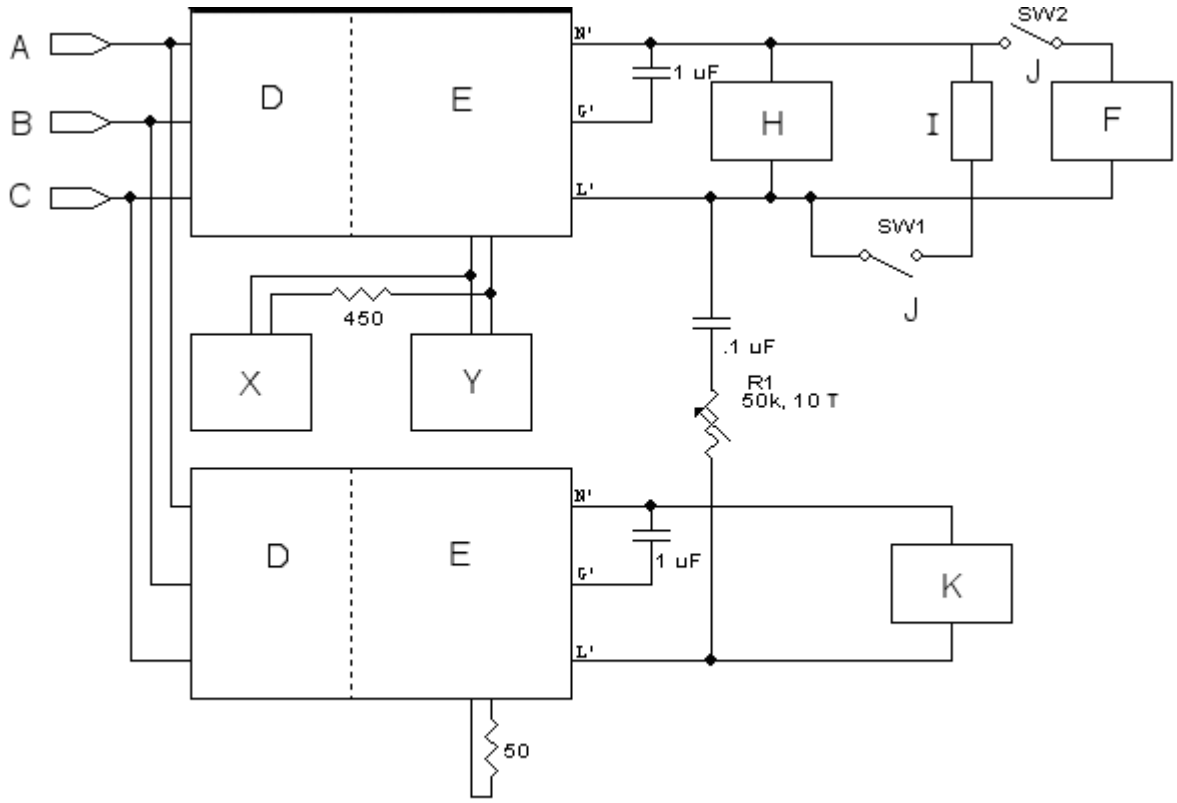

Key:

A	Neutral	H	Receiver under test
B	Ground	I	Notch circuit
C	Line	J	Switch
D	Filter	K	Transmitter
E	V-Network	X	Measuring Receiver(50 Ω)
F	Dimmer Circuit	Y	Signal Generator(50 Ω)
T	Turn		

Figure 6 — Test circuit for receiver performance

6.6.3 Receiving on a quiet line


The quiet line test is performed using the test set-up shown in Figure 6. Switches SW1 and SW2 are open. The packet error rate is measured when there are no impairments and the received signal level ranges from –60 dBV (2,828 mV_{pp}) to at least 9 dBV (8 V_{pp}). (8 V is chosen as a reasonable compromise between node design complexity, performance and ease of testing). The received signal level is measured across the V-network 50 Ω resistor using the measuring receiver while the transmitter is sending packets. Adjusting R1 sets the received level. The verification procedure is to check performance at each endpoint i.e. at –60 dBV and ≥ 9 dBV where the PER% shall be < 0,1%.

6.6.4 Receiving with interference

This test is designed to measure PL transceiver's immunity to interference at various frequencies. There are four frequency bands of interference identified. Figure 7 depicts the four bands and the performance specification. Power line noise is present throughout the entire frequency spectrum and generally increases in amplitude with decreasing frequencies.

--`,,```,,,,````-`-`,,`,,`,`,,`---
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Commercial broadcast signals can be at very high levels and for the purposes of this specification are defined to be between 150 kHz and 500 kHz. European and North American AM broadcast is present at high levels because power lines act as antennas for radio broadcasts. The broadcast region for this test is defined to be between 500 kHz and 1 MHz. The PL transceiver band is defined to be between 100 kHz and 150 kHz.

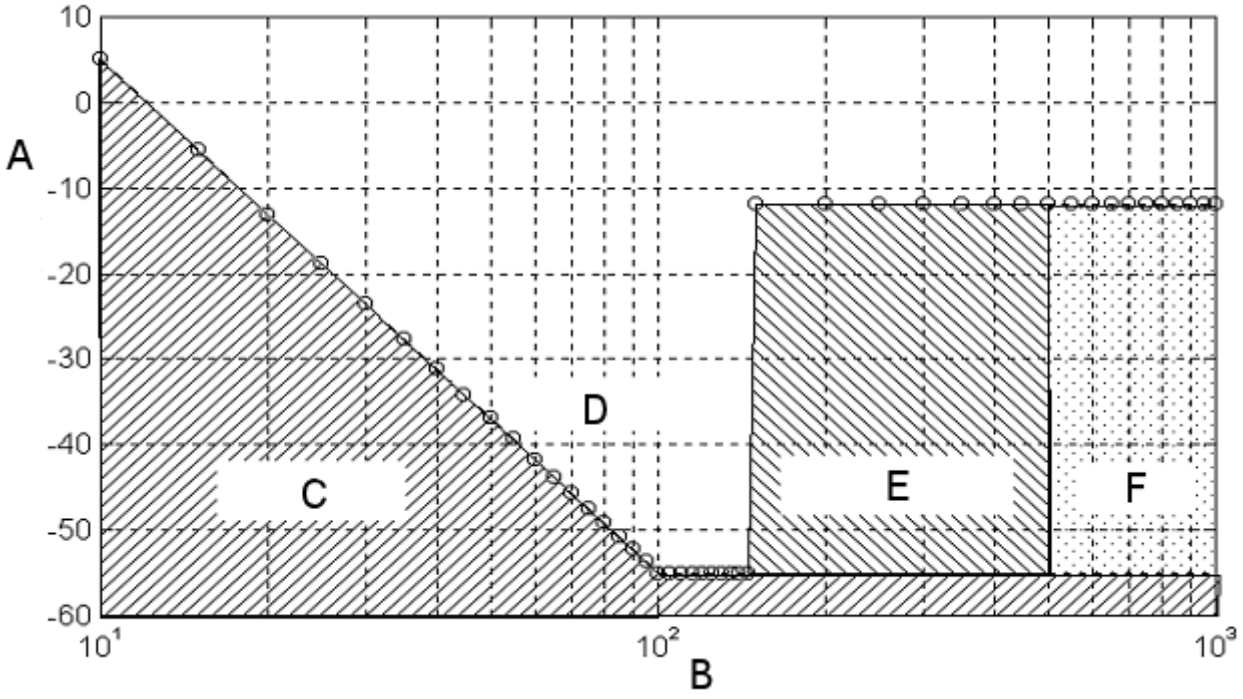

Key:

A Tone Level (dBv)
B Frequency kHz
C Power Line Noise Region
D Power Line Modem Region
E Power Line Intercom and Broadcast Region
F Broadcast Region

Figure 7 — Graph of Tone Interference Specification

The method of measurement is as follows. Referring to Figure 6, switches SW1 and SW2 are open. The receive level is set to –47 dBV on the 50 Ω resistor of the V-network by adjusting R1 when the transmitter is sending packets. The signal generator is set to frequency and amplitudes as shown in Table 2. The frequency spacing is every 5 kHz from 10 kHz to 150 kHz and every 50 kHz from 150 kHz to 1 MHz. The interfering tone level (I_{tone}) is then measured with the tuned receiver. Then for each frequency and amplitude of tone the received packet error rate (PER%) shall be less than 2 %.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table 2 — Settings for receive performance with interfering tone test

Signal generator frequency kHz	Interfering tone level (dBV)
10	5
15	-5
20	-13
25	-19
30	-24
35	-28
40	-31
45	-34
50	-37
55	-39
60	-42
65	-44
70	-46
75	-47
80	-49
85	-51
90	-52
95	-54
100 to 145	-56
150 to 500	-12
550 to 1 000	-12

6.6.5 Receiving through a distorted channel

This test is designed to measure the PL transceiver's immunity to frequency notches in the power line. The test circuit of Figure 6 is used with SW1 closed and SW2 open. The notch circuit is a series RLC network with values R=8,5 Ω, L=150 μH, and C=0,01 μF. This will generate a 10 dB notch with a Q of 5, centred at approximately 130 kHz .The received signal strength is the voltage on the 50 Ω resistor of the V-network and is set by adjusting R1 when the transmitter is sending packets. The received PER% shall be less than 2 % when the received signal is -60 dBV (2,828 mV_{pp}).

6.6.6 Receiving with impulsive noise

This test is designed to measure the PL transceiver's immunity to impulsive noise such as produced by triac-controlled dimmers. The test circuit of Figure 6 is used with SW1 open and SW2 closed. The impulse generator waveform has a shape defined by

$$V_{impulse} \equiv A\sin(2\pi ft)e^{-bt} \tag{3}$$

where

A=75 V;

f=120 kHz;

b=2,4 $\times$ 10^5

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

occurring once each half cycle of the power line voltage with an arbitrary phase offset from the zero crossing point. The waveform can be generated with a commercially available triac controlled dimmer set to the appropriate phase and driving a 100 W bulb. Compliance to the waveform requires that the amplitude of the initial three peaks of the measured time domain signal be within 20 % of the defined shape when measured in a 50 Ω system.

The received signal shall be measured with the $V_{impulse}$ waveform turned off. The received signal strength is the voltage on the 50 Ω resistor of the V-network and is set by adjusting R1 when the transmitter is sending packets. The received PER% shall be less than 2% for a received signal strength of -60 dBV (2,828 mV peak to peak) and the waveform turned on.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Bibliography

[1] EN 50065-4-1, *Signalling on low-voltage electrical installations in the frequency range 3 kHz to 148,5 kHz — Part 4-1:Low voltage decoupling filters — Generic specification*

[2] CISPR 16:1987, *Specification for radio interference measuring apparatus and measurement methods*

[3] EN 50065-7, *Signalling on low-voltage electrical installations in the frequency range 3 kHz to 148,5 kHz — Part 7: Equipment impedance*

--`,,```,,,,````-`-`,,`,,`,`,,`---

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale