The American Society of Mechanical Engineers

PERFORMANCE STANDARD FOR ELECTRIC CHAIN HOISTS

AN AMERICAN NATIONAL STANDARD

REAFFIRMED 2004

FOR CURRENT COMMITTEE PERSONNEL
PLEASE E-MAIL CS@asme.org

ASME HST-1-1999

[Revision of ASME HST-1M-1989 (R1995)]

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

The American Society of Mechanical Engineers

AN AMERICAN NATIONAL STANDARD

PERFORMANCE STANDARD FOR ELECTRIC CHAIN HOISTS

ASME HST-1-1999

[Revision of ASME HST-1M-1989 (R1995)]

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

Date of Issuance: November 8, 1999

This Standard will be revised when the Society approves the issuance of a new edition. There will be no addenda or written interpretations of the requirements of this Standard issued to this edition.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assumes any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of the infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Three Park Avenue, New York, NY 10016-5990

Copyright © 1999 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All Rights Reserved
Printed in U.S.A.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

FOREWORD

This Standard is one in a series that provide performance requirements for hoists and was originally issued in 1982. It was developed by the ASME Standards Committee HST, Hoists — Overhead. It is intended to serve as a guide to manufacturers of the equipment, and to the purchasers and users of the equipment.

Standards in this series are:

HST-2 Hand Chain Manually Operated Chain Hoists
HST-3 Manually Lever Operated Chain Hoists
HST-4 Electric Wire Rope Hoists
HST-5 Air Chain Hoists
HST-6 Air Wire Rope Hoists

This revision adds a new appendix that, in conjunction with ASME HST-1-1999, is intended to replace MIL-H-15317 now used to procure electric chain hoists by the Department of Defense.

Suggestions for improvement of this Standard are welcome. They should be sent to The American Society of Mechanical Engineers; Attn: Secretary, HST Committee, Three Park Avenue, New York, NY 10016-5990.

This Standard was approved as an American National Standard on July 12, 1999.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

ASME STANDARDS COMMITTEE HST
Hoists — Overhead

(The following is the roster of the Committee at the time of approval of this Standard.)

OFFICERS

A. R. Toth, *Chair*
C. J. Gomez, *Secretary*

COMMITTEE PERSONNEL

C. J. Gomez, The American Society of Mechanical Engineers
D. A. Merkel, Square D Co.
E. R. Naylor, Campbell Chain
R. R. Reisinger, FKI Industries, Inc.
A. R. Toth, Harnischfeger Industries, Inc.
F. W. Weidner, Naval Sea Systems Command

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

CONTENTS

Foreword iii
Committee Roster v

1 General 1
1.1 Scope 1
1.2 The Appendices 1
1.3 Reference Standards 1
1.4 Definitions 1

2 Performance 4
2.1 General 4
2.2 Hoist Duty Service Classification 4
2.3 Duty Classification 5
2.4 Application Analysis 6
2.5 Specification of Lift, Headroom, and Reach 6
2.6 Hoist and Trolley Speeds 6
2.7 Types of Trolleys 7

3 Mechanical 7
3.1 Design Stresses 7
3.2 Load Sprockets (Pocket Wheels) 8
3.3 Load Chain 8
3.4 Hooks 8
3.5 Load Blocks 9
3.6 Hoist Brakes 9
3.7 Hand Chain (Hand Chain Operated Trolleys Only) 9
3.8 Overtravel Protection 9
3.9 Overload Limiting Device 9
3.10 Trolley Wheels 9
3.11 Brakes for Motor Driven Trolleys 9

4 Electrical 9
4.1 General 9
4.2 Motors 9
4.3 Controllers 10
4.4 Control Enclosures 10
4.5 Resistors 10
4.6 Current Conductor Systems 10

5 Testing, Marking, Manuals, Installation, Maintenance, and Operating Procedures 11
5.1 Testing of Hoists 11
5.2 Marking 11

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

5.3 Manual 11
5.4 Installation 11
5.5 Maintenance and Operating Procedures (User's Responsibility) 12

6 Typical Hoist and Trolley Inquiry Data 12

Figures

1 Headroom, Lift, and Reach 3
2 Reeving 3

Tables

1 Duty Classifications 7
2 Typical Hoist and Motorized Trolley Speeds 8
3 Standard Rated Motor Voltages 10

Nonmandatory Appendices

A Performance Requirements for Electric Chain Hoists Used in Marine and Other Applications as Required by the U.S. Department of Defense (DOD) 15
B Typical Examples of Hoist Class Selection 25

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

PERFORMANCE STANDARD FOR ELECTRIC CHAIN HOISTS

1 GENERAL

1.1 Scope

(a) This Standard establishes performance requirements for electric chain hoists for vertical lifting service involving material handling of freely suspended (unguided) loads using load chain of the roller or welded link types with one of the following types of suspension:

(1) lug;

(2) hook or clevis;

(3) trolley.

(b) This Standard is applicable to hoists manufactured after the date on which this Standard is issued. It is not applicable to:

(1) damaged or malfunctioning hoists;

(2) hoists that have been misused or abused;

(3) hoists that have been altered without authorization of the manufacturer or a qualified person;

(4) hoists used for lifting or supporting people;

(5) hoists used for the purpose of drawing both the load and the hoist up or down the hoist's own load chain(s); and

(6) hoists used for marine and other applications as required by the Department of Defense (DOD).

1.2 The Appendices

Nonmandatory Appendix A, Performance Requirements for Hoists Used in Marine Applications and Other Applications as Required by the Department of Defense (DOD), applies to the performance requirements for hoists used in marine and other applications.

The requirements stated in Appendix A are in addition to the requirements of ASME HST-1-1999 and must be separately invoked.

Nonmandatory Appendix B, Typical Examples of Hoist Class Selection, includes examples of hoist applications as an aid to users in making the selection of the proper hoist for the application.

1.3 Reference Standards

The following documents form a part of this Standard to the extent specified herein. The latest issue shall apply.

ANSI Z535.4, Product Safety Signs and Labels

NEMA 250, Enclosures for Electrical Equipment (1,000 Volts Maximum)

Publisher: National Electrical Manufacturers Association (NEMA), 1300 North 17th Street, Rosslyn, VA 22209

ANSI/NFPA 70, National Electrical Code

Publisher: National Fire Protection Association (NFPA), 1 Batterymarch Park, Quincy, MA 02269

ASME B29.1, Precision Power Transmission Roller Chains, Attachments, and Sprokets

ASME B30.2, Overhead and Gantry Cranes (Top Running Bridge, Single or Multiple Girder, Top Running Trolley Hoist)

ASME B30.7, Base Mounted Hoists

ASME B30.9, Slings

ASME B30.10, Hooks

ASME B30.11, Monorails and Underhung Cranes

ASME B30.16, Overhead Hoists (Underhung)

ASME B30.17, Overhead and Gantry Cranes (Top Running, Bridge, Single Girder, and Underhung Hoist)

Publisher: The American Society of Mechanical Engineers (ASME International), Three Park Avenue, New York, NY 10016; ASME Order Department: 22 Law Drive, Box 2300, Fairfield, NJ 07007-2300

1.4 Definitions

abnormal operating conditions: environmental conditions that are unfavorable, harmful, or detrimental to the operation of a hoist, such as excessively high or low temperature, exposure to weather, corrosive fumes, dust laden or moisture laden atmospheres, and hazardous locations.

ambient temperature: the temperature of the atmosphere surrounding the hoist.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

beam: an overhead standard structural or specially fabricated shape, on which the trolley operates.

brake: a device, other than a motor, used for retarding or stopping the hoist or trolley motion by friction or power means.

brake, holding: a friction brake for a hoist that is automatically applied and prevents motion when power is off.

brake, mechanical load: an automatic type of brake used for controlling loads in a lowering direction. This unidirectional device requires torque from the motor to lower a load but does not impose additional load on the motor when lifting a load.

contactor: an electromechanical device for opening and closing an electric power circuit.

control actuator: a manual means at the operating station by which hoist controls are energized.

control enclosure: the housing containing the electrical control components.

controlled braking means: a method of controlling speed by removing energy from the moving body, or by imparting energy in the opposite direction.

dynamic: a method of controlling speed by using the motor as a generator, with the energy being dissipated by resistance.

mechanical: a method of controlling or reducing speed by friction.

regenerative: a method of controlling speed in which the electrical energy generated by the motor is fed back into the power system.

cushioned start: an electrical or mechanical method for reducing the rate of acceleration of trolley motion.

hand chain: the chain provided to control movement of a hand-chain operated trolley.

hazardous (classified) locations: locations where fire or explosion hazards may exist. Locations are classified depending on the properties of the flammable vapors, liquids or gases, or combustible dusts or fibers that may be present, and the likelihood that a flammable or combustible concentration or quantity is present. Refer to ANSI/NFPA 70.

class 1 locations: locations in which flammable gases or vapors are or may be present in the air in quantities sufficient to produce explosive or ignitable mixtures.

class 2 locations: locations that are hazardous because of the presence of combustible dust.

class 3 locations: locations that are hazardous because of the presence of easily ignitable fibers or flyings, but in which such fibers or flyings are not likely to be in suspension in the air in quantities sufficient to produce ignitable mixtures.

headroom: headroom is measured with the load hook at its upper limit of travel and is the distance from the saddle of the load hook to the following locations (see Fig. 1):

(a) saddle of the top hook on hook suspended hoists;

(b) center line of the suspension holes on lug suspended hoists;

(c) bottom of the beam on trolley suspended hoists.

hoist: a suspended machinery unit that is used for lifting or lowering a freely suspended (unguided) load.

hoist speed: the rate of motion that the load hook obtains while lifting rated load.

hook suspended: suspension of hoist from a trolley or rigid structure by means of a hook at top of hoist.

idler sprocket: a freely rotating device that changes the direction of the load chain. This device is sometimes called idler wheel, idler sheave, pocket wheel, or chain wheel (see Fig. 2).

lift: the maximum vertical distance through which the load hook can travel, and is the total hook movement between its upper limit of travel and its lower limit of travel (see Fig. 1).

lifting devices: devices that are not normally reeved onto the hoist chains such as hook-on buckets, magnets, grabs, and other supplemental devices used for handling certain types of loads. The weight of these devices is to be considered part of the load to be lifted.

lift limiting device: an electrical, mechanical, or electromechanical device for limiting the upward or downward travel of the load hook at the extremities of lift. This device may limit lift at any point within the extremities of lift, if designed to be adjustable.

load: the total imposed weight on the load block or hook.

load block: the assembly of hook or shackle, swivel, bearing, pins, sprocket, and frame suspended by the load chain. This shall include all appurtenances reeved in the load chain.

load chain: the load suspension chain in the hoist.

roller chain: a series of alternately assembled roller links and pin links in which pins articulate inside the

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

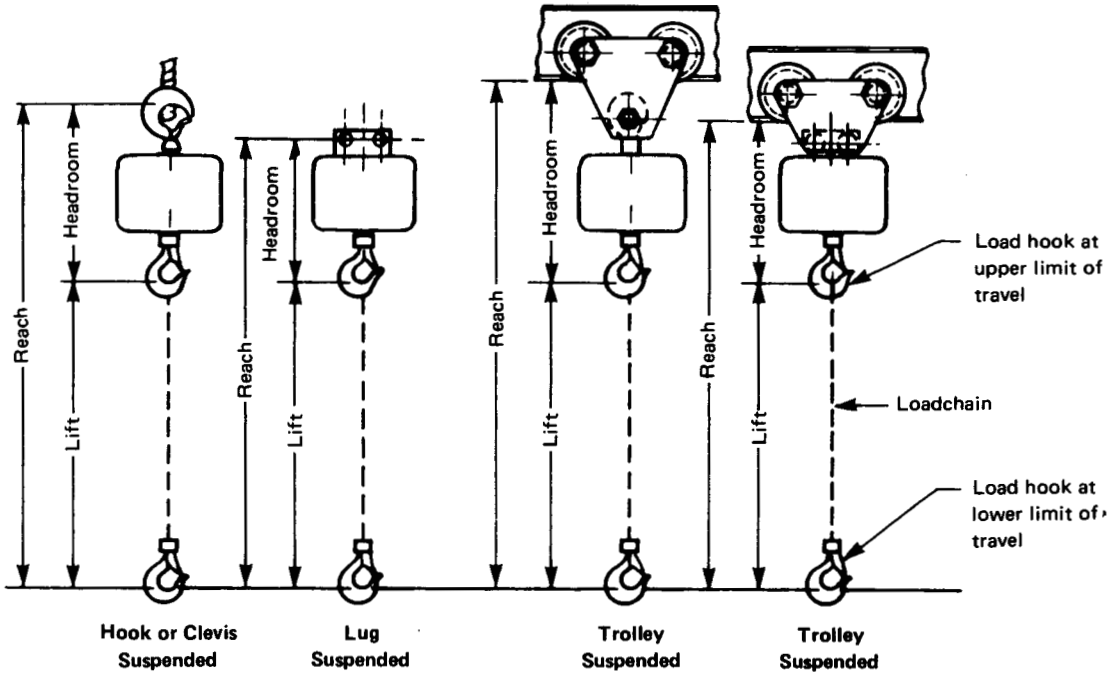


FIG. 1 HEADROOM, LIFT, AND REACH

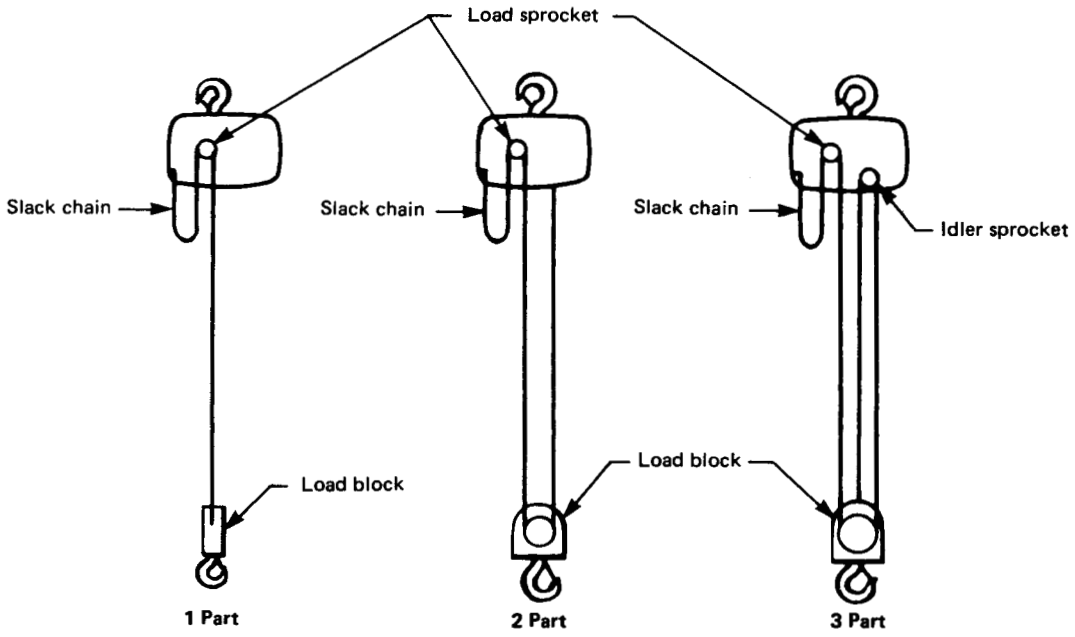


FIG. 2 REEVING

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

bushings and rollers are free to turn on the bushings. Pins and bushings are press-fit in their respective link plates.

welded link chain: a chain consisting of a series of interwoven links formed and welded.

NOTE: Hand chain and load chain properties do not conform to those shown in ASME B30.9, or ASME B29.1.

load chain container: a device used to collect the slack load chain.

load hook: the hook used to connect the load to the hoist.

load sprocket: a hoist component that transmits motion to the load chain. This component is sometimes called load wheel, load sheave, pocket wheel, chain wheel, or lift wheel (see Fig. 2).

load suspension parts: the load suspension parts are the means of suspension (trolley, hook, or lug), the chain, the sprocket(s), the structure or housing that support the sprocket(s), and the load block.

lug suspended: suspension of the hoist from a trolley or permanent structure by means of a bolt(s) or pin(s) through a rigid or swivel type lug.

magnetic control: a means of controlling the direction and speed of the hoist and trolley by using magnetic contractors and relays.

minimum radius: the smallest radius of the beam, measured to the center line of the web of the beam, on which the trolley will operate.

normal operating conditions: conditions during which a hoist is performing functions within the scope of the original design.

overload: any load greater than the rated load.

parts (lines): number of lines of chain supporting the load block or hook.

pendant station: electrical controls suspended from the hoist for operating the unit.

power transmission parts: the power transmission parts of the hoist are the machinery components, including the gears, shafts, clutches, coupling, bearings, motors, and brakes.

qualified person: a person who, by possession of a recognized degree, certificate of professional standing, or who by extensive knowledge, training, and experience has successfully demonstrated the ability to solve or resolve problems relating to the subject matter and work.

rated load: the maximum load for which a hoist or trolley is designated by the manufacturer.

reach: the distance from saddle of load hook at its lower limit of lift to the upper point of the headroom measurement. Reach is equal to lift plus headroom (see Fig. 1).

reeving: a system in which a chain travels around sprockets (see Fig. 2).

shall: use of the word shall indicates that adherence to the particular requirement is necessary in order to conform to the Standard.

should: use of the word should indicates that the rule is a recommendation, the advisability of which depends on the facts in each situation.

STOP-START, OFF-ON, POWER OFF-POWER ON, control function: a control function used to close and open a mainline contactor, that provides or removes line power to or from all other function contactors.

switch: a device for making, breaking, or for changing the connections of an electric circuit.

trolley: a wheeled mechanism from which a hoist is suspended to provide horizontal motion of the hoist along a beam.

trolley speed: the rate of motion that a motor operated trolley (and hoist) obtains while traveling along a beam.

trolley suspended: suspension of hoist from a trolley. Hoist can be connected to trolley by hook, clevis, or lug suspension, or the hoist can be integral with trolley.

2 PERFORMANCE

2.1 General

All equipment selected in accordance with this Standard is designed to perform satisfactorily when used in accordance with para. 5.5 and used within the rated load and hoist duty service classification. All equipment shall provide speeds, lifts, and headroom in accordance with manufacturer's specifications or to specifications agreed upon by the manufacturer and the user.

2.2 Hoist Duty Service Classification

2.2.1 General Considerations. Service conditions have an important influence on the performance of the wearing parts of a hoist such as gears, bearings, load chain, sprockets, electrical equipment, brake lin-

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

ings, load and lift limiting devices, and wheels. Careful consideration of the hoist duty service classifications described in this section will enable the user to evaluate the application, and to obtain a hoist designed for optimum performance and minimum maintenance. If doubt exists regarding hoist selection, the hoist supplier should be consulted. Many factors enter into the selection of the proper hoist to perform a given function. Hoisting equipment consists of both mechanical and electrical components and both must be considered when analyzing the service the hoist must perform. The factors that influence the mechanical and electrical performance of any hoist include:

(a) load distribution: the actual distribution or proportion of full and partial loads to be handled by the equipment, including lifting devices, has an important effect on the life of power transmission components. For example, ball-bearing life varies according to the cube of the load. A two ton hoist operated at a mean effective load of one ton will have a ball bearing life eight times that of the same hoist used steadily at its rated load.

(b) operational time: the total running time of the hoist per hour or per work period;

(c) work distribution: whether the operational time is uniformly distributed over the work period or concentrated in a short time span. Work distribution generally does not appreciably affect mechanical wear, but does materially affect the electrical components such as motors, brakes and controls. For example, a hoist motor designed to operate 15 min out of each hour of an 8 hr shift cannot handle 2 hr of steady run and 6 hr of idle time even though either condition only requires 2 hr of operational time per 8 hr shift.

(d) number of starts and stops: directly affects all electromechanical devices, such as motors, contactors, brakes, and solenoids;

(e) repetitive long lowering operations: such operations generate heat in control braking means;

(f) environmental conditions: hoist equipment is designed to operate in ambient temperatures between 0°F (−18°C) and 104°F (40°C), and in atmospheres reasonably free from dust, moisture, and corrosive fumes unless otherwise specified;

(g) hazardous locations: when hoists are used in hazardous locations as defined by ANSI/NFPA 70 or other special codes, modifications or additional precautions not covered by this Standard may be required. In these locations, only hoists designed in a manner suitable for the conditions encountered shall be used.

2.3 Duty Classification

While all the factors listed in para. 2.2.1 must be considered in selecting the proper class of hoist, most industrial applications, having randomly distributed loads or uniform loads up to 65% of rated load handled periodically throughout the work period, can be generalized according to the type of work shop or area of application. Listed in Col. 1, Table 1 are the three duty classes that have been established for electric chain hoists. In Col. 2 are listed typical areas of application where each class can normally be applied. The majority of hoist applications will fall into one of the two categories, H2 or H3, and the use of the generalized description in Col. 2 of Table 1 for selection of the hoist will be adequate.

2.3.1 Operational Time Ratings. If in doubt as to the required duty classification for an application, refer to the data in Cols. 3 through 6 of Table 1, which show the operational time ratings for each class.

(a) Uniformly Distributed Work Periods:

(1) Maximum on Time, min/hr (Col. 3): the maximum running time in minutes per hour permitted for duty class when hoist utilization is uniformly distributed over a given work period;

(2) Maximum Number of Starts per Hour (Col. 4): the maximum number of motor starts per hour permitted for the duty class when hoist utilization is uniformly distributed over a given work period.

(b) Infrequent Work Periods:

(1) Maximum on Time From Cold Start, in Minutes (Col. 5): the maximum total running time for hoist utilization for the duty class starting with hoist at ambient temperature. These values cover infrequent periods of extended use and are applicable only with hoist at ambient temperature and cannot be repeated unless hoist is allowed to cool down to ambient temperature between periods. Typical examples would include setting machinery in place, unloading a truck-load of steel, filling a stock order from a stock room, etc.

(2) Maximum Number of Starts (Col. 6): the maximum total number of motor starts permitted for infrequent work periods specified in Col. 5.

2.3.2 Mean Effective Load. Mean effective load denotes a theoretical single load value that has the same effect on the hoist as various loads actually applied to the hoist over a specified period of time. K is the mean effective load factor and is expressed as:

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

$$K = \sqrt[3]{W_1^3 P_1 + W_2^3 P_2 + W_3^3 P_3 \ldots . + W_n^3 P_n}$$

where:

K = mean effective load factor. Mean effective load factor is the ratio of mean effective load to rated load.

W = load magnitude. Load magnitude is the ratio of the hoist operating load to the hoist rated load. Operation with no load must be included along with the weight of any dead load such as lifting attachment of devices.

P = load probability. Load probability is the ratio of running time under each load magnitude condition to the hoist total running time. The sum total of all load probabilities used in the above equation must equal 1.0.

2.3.3 Randomly Distributed Loads. Randomly distributed implies that loads applied to the hoist are assumed to be evenly distributed within the rated load of the hoist in decreasing steps of 20% of the previous load value. Random loads are, therefore, considered as 100, 80, 64, 51, 41, 33, 26, etc., % of rated load. Operation with random loads is considered on an equal time basis for the operating time remaining after accounting for the time the hoist is operating at no load and with rated load. Randomly distributed loads will result in a mean effective load factor of 0.65.

2.4 Application Analysis

2.4.1 General

(a) If the operation consists of lowering loads over long distances of more than 50 ft (15 m), the mechanical load brake heat dissipation capability (overheating) may become a factor. Consult manufacturer for particulars.

(b) Motor heating generated by the number of starts is not appreciably affected by the load on the hook and therefore the limits imposed by Cols. 3 through 6 are applicable for the motor regardless of the load being handled.

2.4.2 Fundamental Application Analysis. It is not necessary to perform a detailed application analysis or calculate mean effective load factor if all of the conditions listed below are met.

(a) The hoist is operating at no load during one-half of its operating time (load probability equals 0.5.).

(b) The hoist is operating with rated load for a period of time not exceeding 20% of its operating time (load probability equal to or less than 0.2).

(c) Other loads applied to the hoist during the remainder of its operating time are randomly distributed.

Conditions wherein the above operating criteria are met will result in a mean effective load factor of 0.65 or less. If any one of these conditions cannot be met, or if a below-the-hook lifting device is attached to the load hook, a detailed application analysis using a calculated mean effective load factor should be conducted.

2.4.3 Detailed Application Analysis. The following general method may be used to make a detailed application analysis. Several examples of this detailed analysis method are given in Appendix B.

(a) Select a hoist class from Table 1 based on the general descriptions given in Col. 2.

(b) Select a hoist with a rated load rating equal to or greater than maximum load to be lifted.

(c) Using the information in Cols. 3 through 6, select the hoist speed that will meet the operational time ratings for hoist duty class.

(d) Determine value of K. If K is greater than 0.65, select a hoist with a higher rated load rating and recalculate K to make sure it is equal to or less than 0.65.

(e) If the requirements of the operational time values in Table 1 and K equal to or less than 0.65 cannot be met, contact the manufacturer.

2.5 Specification of Lift, Headroom, and Reach

2.5.1 Lift. Most electric chain hoists are manufactured with standard lifts of 10 ft (3.1 m), 15 ft (4.6 m), and 20 ft (6.1 m). One of these standard lifts will normally be adequate for the particular requirement. It is recommended that purchaser specify the required lift on his inquiry or bid request.

2.5.2 Headroom. Headroom should be specified if important to the application.

2.5.3 Reach. Reach should be specified if important to the application.

2.6 Hoist and Trolley Speeds

Hoisting equipment is available over a wide range of hoist and trolley speeds. Listed in Table 2 are typical speed ranges commonly available. Hoist and trolley speeds may vary ±10% from the specified speed.

NOTE: Table 2 is to be used as a guide only and is not intended to restrict either the manufacturer or buyer from offering or specifying speeds outside the ranges shown, nor should it be inferred that

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

TABLE 1 DUTY CLASSIFICATIONS

Host Duty Class (Col. 1)	Typical Areas of Application (Col. 2)	Operational Time Ratings at $K = 0.65$ [Note (1)]			
		Uniformly Distributed Work Periods		Infrequent Work Periods	
		Max. On Time, min/hr (Col. 3)	Max. No. Starts/hr (Col. 4)	Max. On Time From Cold Start, min (Col. 5)	Max. No. of Starts (Col. 6)
H2	Light machine shop fabricating, service, and maintenance; loads and utilization randomly distributed; rated loads infrequently handled	7.5 (12.5%)	75	15	100
H3	General machine shop fabricating, assembly, storage, and warehousing; loads and utilization randomly distributed	15 (25%)	150	30	200
H4	High volume handling in steel warehouses, machine shops, fabricating plants and mills, and foundries; manual or automatic cycling operations in heat treating and plating; loads at or near rated load frequently handled	30 (50%)	300	30	300

NOTE:
(1) See paras. 2.3.1 and 2.3.2.

speeds above or below the ranges shown are not compatible with the required class of hoist.

2.7 Types of Trolleys

Hoist trolleys are available in plain, hand chain operated, and motor driven types. Selection of each type depends upon the application.

2.7.1 Plain Type. This type is recommended where trolley motion is infrequent or relatively short. Due to the required force to manually operate this type of trolley, it is also recommended that use of plain trolleys be limited to a maximum load of 3 tons (3,000 kg) with the elevation of the beam not more than 20 ft (6 m) above the operator's floor level.

2.7.2 Hand Chain Operated. Motion is obtained by pulling on the hand chain that is connected to trolley wheels through gears or sprockets. This type is recommended where trolley motion is relatively infrequent or short, and especially for those loads and beam heights where a plain type trolley would be impractical. The hand chain operated trolley provides good load spotting ability.

2.7.3 Motor Operated. This type is recommended where operating frequency, distance of travel, or the type of load to be handled would cause unsatisfactory operation if trolley were plain or hand chain operated type. Design of motor operated trolleys shall be based on intermittent operation on a straight beam, unless otherwise specified. Where trolley travel involves curved beam, beam switches, exceptionally long runs, or near-continuous operation, a special design may be required and full particulars should be provided with inquiry.

3 MECHANICAL

3.1 Design Stresses

(a) The hoist and the means of suspension supplied with the hoist shall be designed to withstand all stresses imposed under normal operating conditions while handling loads within the rated load.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

TABLE 2 TYPICAL HOIST AND MOTORIZED TROLLEY SPEEDS

Rated Load				Hoist Speed [Note (3)]		Motorized Trolley Speed [Note (3)]	
tons [Note (1)]	(kg) [Note (1)]	tonnes [Note (2)]	(kg) [Note (2)]	ft/min	(m/min)	ft/min	(m/min)
1/8	(114)	1/8	(125)	16–64	(5–20)		
1/4	(227)	1/4	(250)				
1/2	(454)	1/2	(500)	7–64	(2–20)		
1	(908)	1	(1,000)				
						30–100	(9–30)
1 1/2	(1,361)	1 1/2	(1,500)				
2	(1,815)	2	(2,000)	4–40	(1–12)		
3	(2,722)	3	(3,000)				
4	(3,629)	4	(4,000)	4–24	(2–7)		
5 and over	(4,536)	5 and over	(5,000)				

GENERAL NOTES:
(a) Hoist and trolley speeds should be determined by an analysis of the number and length of cycles required for the work period.
(b) For trolley speeds above 100 ft/min (30 m/min) or for use on beams with curved sections, it is recommended that a cushioned start or multispeed drive be specified.
(c) In applications requiring close load spotting for hoist or trolley, refer to manufacturer for reduced speed or multiple speed control.

NOTES:
(1) Tons of 2,000 lb.
(2) Tonnes of 1,000 kg.
(3) Ranges shown are for single-speed hoists and trolleys.

(b) Load suspension parts shall be designed so that the static stress calculated for the rated load shall not exceed 20% of the average ultimate material strength. Elements specifically provided to give a visible warning of severe overload by structural deformation shall be designed so that the static stress calculated for the rated load shall not exceed 35% of the average ultimate strength.

(c) Power transmission parts shall be designed so that the dynamic stresses calculated for the rated load shall not exceed the fatigue and endurance limit established by the manufacturer.

(d) Modifications to upgrade, rerate, or modernize hoist equipment shall be as authorized only by the original equipment manufacturer or a qualified person. After such modifications are made, the hoist shall be tested in accordance with ASME B30.16.

3.2 Load Sprockets (Pocket Wheels)

(a) Load sprockets shall have pockets or teeth formed to allow proper engagement of the load chain.

(b) Load sprockets shall be guarded to minimize entrance of foreign objects.

(c) Provision shall be made to guard against jamming of the load chain within the hoist mechanism.

3.3 Load Chain

(a) Load chain may be either roller or welded link type and shall be suitable for powered hoist service. Chain shall be accurately pitched to pass over load sprockets without binding.

(b) Load chains shall be proof tested by the chain manufacturer or hoist manufacturer with a load at least equivalent to one and a half times the hoist rated load divided by the number of chain parts (lines) supporting the load.

(c) If a load is supported by more than one part of load chain, the tension of the parts shall be equalized.

3.4 Hooks

(a) If the hooks are of the swiveling type, they should be free to rotate. Load block hooks should be capable of rotating through 360 deg when supporting the rated load.

(b) Hooks shall be equipped with latches unless the

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

application makes the use of the latch impractical. When required, a latch shall be provided to bridge the opening of the hook for the purpose of retaining slings, chains, etc., under slack conditions.

3.5 Load Blocks

Load blocks shall be of the enclosed type and shall guard against load chain jamming during normal operating conditions.

3.6 Hoist Brakes

(a) The braking system shall consist of a brake and controlled braking means and shall perform the following functions under normal operating conditions with a rated load, and under test conditions with test loads up to 125% of rated load.

(1) Stop and hold the load when controls are released.

(2) Control the load during lowering to a maximum speed of 120% of rated lowering speed for the load being handled.

(3) Stop and hold the load in the event of a complete power failure.

(b) The braking system shall have heat dissipation capability for the frequency of operation required by the hoist duty service classification.

(c) The braking system shall have provision for adjustment where necessary to compensate for wear.

3.7 Hand Chain (Hand Chain Operated Trolleys Only)

(a) The hand chain shall be guarded to prevent hand chain disengagement from the hand chain wheel.

(b) The hand chain shall withstand, without permanent distortion, a force of three times the pull required to traverse the trolley with rated load.

3.8 Overtravel Protection

A lift limiting device shall be provided so that the load hook, either loaded or empty, shall not exceed the upper limit of travel.

3.9 Overload Limiting Device

An overload limiting device, when furnished, shall be designed to permit operation of the hoist within its rated load and to limit the amount of overload that can be lifted by a properly maintained hoist, under normal operating conditions.

The overload limiting device may allow the lifting of an overload, but shall be designed to prevent the lifting of an overload that could cause damage to the hoist. This does not imply that any overload is to be intentionally applied to the hoist.

The overload limiting device is an emergency device and shall not be used to measure the maximum load to be lifted, and shall not be used to sense the overload imposed by a constrained load.

3.10 Trolley Wheels

When a trolley is required for use with a hoist, the type and size of support beam must be specified to ensure that the trolley wheel contour is suitable for the contour of the beam.

3.11 Brakes for Motor Driven Trolleys

Brakes, when specified, may be actuated by mechanical or electrical means and shall have the following characteristics.

(a) Brakes shall have sufficient capacity to stop the trolley within a distance in feet (meters) equal to 10% of the rated speed in feet per minute (meters per minute) when traveling at a rated speed with rated load.

(b) Brakes shall have heat dissipation capability for the specified frequency of operation.

(c) Brakes shall have provision for adjustment where necessary to compensate for wear.

4 ELECTRICAL

4.1 General

All electrical equipment furnished shall conform to the applicable section of the latest issue of ANSI/NFPA 70. The user shall specify the voltage, frequency, and phase of the power supply. The supply voltage shall be maintained within ±10% of the rated motor voltage at the motors with hoist operating at rated load.

4.2 Motors

(a) Motors shall be reversible, with torque characteristics suitable for hoist or trolley service and capable of operation at rated loads and speeds in accordance with the class of service specified.

(b) Temperature rise of motors shall be in accordance with the latest NEMA Standards for the class of insulation and enclosure used. The hoist manufacturer will assume 104°F (40°C) ambient temperature unless otherwise specified by the user.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

TABLE 3 STANDARD RATED MOTOR VOLTAGES

Power Supply	Nominal System	Rated Motor Voltages	Permissible Motor Operating Range
AC Single	120	115	104 to 126
Phase 60 Hz	240	230	207 to 253
AC	208	200	180 to 220
Polyphase	240	230	207 to 253
60 Hz	480	460	414 to 506
	600	575	518 to 632
AC	208	200	180 to 220
Polyphase	230	220	198 to 242
50 Hz	400	380	342 to 418

(c) All motors at rated frequency shall be capable of operation at ±10% of rated motor voltage, but not necessarily at rated voltage performance.

(d) Standard rated motor voltage shall be in accordance with Table 3.

(e) For nominal system voltages other than shown in Table 3, the rated motor voltage should not be less than 95% and shall not exceed the nominal system voltage.

4.3 Controllers

4.3.1 Types of Control

(a) Hoists and motor driven trolleys will have single-speed controls unless otherwise specified.

(b) Other types of hoist and trolley controls are available. Consult the hoist manufacturer.

4.3.2 Contactors. Each magnetic control shall have contactors sized for the specified service. Reversing contactors shall be interlocked to prevent line-to-line faults.

4.3.3 Pendant Control

(a) Motion control actuators shall be spring return to the "**OFF**" position.

(b) Pendant control station shall be mechanically supported to protect the electrical conductors against strain.

(c) The pendant control station shall be clearly marked to indicate the function of each actuator.

(d) Unless otherwise specified, and as applicable, the order of control functions shall be, from top to bottom, "**HOIST**," "**TROLLEY**," and other functions.

(e) "**STOP-START (OFF-ON, POWER OFF-POWER ON)**" control, if supplied, should be located at the top, above the hoist control function. The "**STOP (OFF, POWER OFF)**" control shall be red.

(f) Any pendant station that might present a hazard to the operator if a ground fault occurs shall be grounded.

(g) The maximum voltage in the pendant control station shall be 150 V AC.

(h) Unless otherwise specified, the standard pendant control shall have a cord length that will locate the pendant approximately 3 ft to 4 ft (0.9 m to 1.2 m) above the lower limit of lift.

4.3.4 Pull Cord Control. Pull cord control, when furnished, shall consist of a self-centering, return-to-neutral controller or master switch for the motion of hoist or trolley. Two nonconducting pull cords with suitable handles, clearly marked for direction, shall be provided for operation of each controller or master switch. Unless otherwise specified, the standard pull cord control shall have a cord length that will locate the control handles approximately 4 ft to 5 ft (1.2 m to 1.5 m) above the lower limit of lift.

4.4 Control Enclosures

Control enclosures, unless otherwise specified, shall be Type 1, general purpose for indoor application, in accordance with NEMA 250.

4.5 Resistors

Resistors, when furnished, shall have sufficient heat dissipation capability for the class of service specified. Enclosures for resistors shall provide means for heat dissipation and shall be installed to minimize the accumulation of combustible matter. Provision shall be made to contain broken resistor parts or molten metal.

4.6 Current Conductor Systems

A length of flexible power cord shall be provided unless otherwise specified. The user should contact hoist

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

manufacturer for special arrangements to accommodate systems for trolley suspended hoists such as the following:

(a) flexible cable;
(b) coiled cord;
(c) festooned cable;
(d) cable reel; and
(e) rigid conductor.

5 TESTING, MARKING, MANUALS, INSTALLATION, MAINTENANCE, AND OPERATING PROCEDURES

5.1 Testing of Hoists

All hoists shall be tested in accordance with ASME B30.16.

5.2 Marking

5.2.1 Rated Load. The rated load of the hoist shall be marked on the hoist or load block.

5.2.2 Controls. Each control actuator shall be marked to indicate the direction of resultant motion.

5.2.3 Identification. The hoist shall be marked with the following information:

(a) name of the manufacturer;
(b) manufacturer's model or serial number;
(c) voltage, phase and frequency of AC power supply; and
(d) hoist circuit ampacity.

5.2.4 Warnings. All hoists shall have affixed to the hoist, load block, or controls, in a readable position, a label or labels displaying information concerning operating procedures. The label or labels shall be in compliance with ANSI Z535.4, and shall include cautionary language against:

(a) lifting more than rated load;
(b) operating hoist when load is not centered under hoist;
(c) operating hoist with twisted, kinked, or damaged chain or rope;
(d) operating damaged or malfunctioning hoist;
(e) lifting people or loads over people;
(f) operating a rope hoist with a rope that is not properly seated in its groove; and
(g) removing or obscuring warning label.

5.3 Manual

The manufacturer shall furnish, with each hoist, one copy of an instruction manual.

The manual shall include information on the following:

(a) installation;
(b) operation;
(c) inspection and testing;
(d) lubrication, maintenance, and repair; and
(e) wiring diagram (may be supplied separately).

5.4 Installation

5.4.1 Procedures. All equipment should be installed according to the manufacturer's recommendations, the applicable sections of ASME B30.16, B30.11, B30.17, ANSI/NFPA 70, and any other pertinent federal, state, and local regulation.

5.4.2 Support

(a) The supporting structure, including trolley(s), monorail, or crane, if any, shall be designed to withstand the loads and forces imposed by the hoist.
(b) Trolley stops shall be installed at the limits of trolley travel.

5.4.3 Location

(a) A hoist shall be operated only in locations that will permit the operator to be clear of the load at all times.
(b) When hoists are used in hazardous locations as defined by ANSI/NFPA 70, modifications to these rules or additional safety requirements may be necessary. In these locations, hoists shall be designed and installed in a manner suitable for the conditions encountered.
(c) Pendant controls should be located at a convenient level above the operating floor.
(d) A hoist shall not be installed where the load hook can be lowered beyond the lower limit of travel under normal operating conditions unless the hoist is equipped with a lower limit device.
(e) Where the slack load chain hanging from the hoist may create a hazard to operations or personnel, a chain container, of a design recommended by the hoist manufacturer, should be used.

5.4.4 Direction of Motion. Polyphase hoist motors shall be connected to the power supply lines in such a manner that the hook motion agrees with the control marking. Internal connections in the hoist or pendant station wiring shall not be changed to accomplish this. Phase reversal (motor reversal), if necessary, shall be

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

accomplished by reversing the power leads to the hoist unit.

5.4.5 Check Points. After installation, the following items should be checked:

(a) hoist hook motion and trolley motion for agreement with control direction indication and prompt return of actuators to "**OFF**" position;

(b) hoist load chain free from twists, damage, and improper seating in sprockets;

(c) lift and travel limiting devices for proper operation;

(d) braking system for proper operation;

(e) load chain for proper lubrication; and

(f) hoist and trolley for proper lubrication.

5.5 Maintenance and Operating Procedures (User's Responsibility)

All equipment should be inspected, tested, operated, and maintained according to the manufacturer's recommendations and the applicable sections of ASME B30.16, B30.11, and B30.17. Consideration should also be given to pertinent federal, state, and local regulations.

6 TYPICAL HOIST AND TROLLEY INQUIRY DATA

See form on next page.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

TYPICAL HOIST AND TROLLEY INQUIRY DATA FORM

HOIST

Quantity required _____

Rated capacity _____tons (_____kg)

Lift[1] _____ft (_____m)

Reach _____ft (_____m)

Headroom _____in. (_____m)

Distance from operating floor to underside of beam or to point of support:

_____ft _____in. (_____m)

Hoisting speed _____ft/min (_____m/min)

Type of control: ☐ Single Speed ☐ Two Speed

☐ Other_____

POWER SUPPLY

Voltage	Phase	Hertz	Control Voltage
☐ 200	3	60	☐ 24
☐ 230	3	60	☐ 115
☐ 460	3	60	☐ Other ___
☐ 575	3	60	
☐ 115	1	60	
☐ 230	1	60	
☐ ___	___	___ Other	

Performance Requirements (see Section 2 and Appendix B):

Average lift _____ft (_____m)

Number of lifts/hr _____

Number of starts/hr _____

Shift hrs/day _____

Hoist service classification H- _____

Furnish complete information regarding any abnormal operating conditions: _____

_____

_____

_____

_____

Type of Suspension:

☐ Lug ☐ Hook ☐ Clevis

☐ Plain trolley ☐ Hand chain operated trolley

☐ Motor operated trolley

☐ Other _____

TROLLEY (See Section 2)

Travel speed _____ft/min (_____m/min)

☐ Trolley brake required

Type of control:

☐ Single speed ☐ Two speed ☐ Cushioned start

☐ Other _____

Type and size of beam _____

Width of running flange _____in. (_____mm)

Minimum radius of beam curves

_____ft _____in. (_____m)

Clearance dimensions of interlocks, switches, or beam splices (if used) _____

_____

_____

Current conducter system:

☐ Flexible cable or ☐ Festooned cable

☐ Cable Reel ☐ Rigid conductor ☐ Coiled cord

☐ Other _____

Type of conductors (manufacturer) _____

Location of conductors on beam (use sketch if necessary) _____

_____

_____

OPTIONAL EQUIPMENT

_____

_____

_____

_____

_____

_____

[1] Refer to manufacturer's catalog for standard lift that will meet the application requirement.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS Not for Resale

NONMANDATORY APPENDIX A

A1 General 16
A1.1 Scope 16
A1.2 Classification 16
A1.3 Definitions 16
A1.4 References to Other Codes and Standards 16

A2 Performance Requirements 17
A2.1 General 17
A2.2 Application 17
A2.3 Characteristics 17
A2.4 Emergency Manual Operation 17
A2.5 Load Positioning Control 17
A2.6 Lubrication 17
A2.7 Painting 17
A2.8 Workmanship 17
A2.9 Interchangeability 18

A3 Mechanical Requirements 18
A3.1 Design Stresses 18
A3.2 Load Hooks 18
A3.3 Construction 18
A3.4 Type I Electric Chain Hoist, Lug Suspension, Double-Acting 19
A3.5 Type II Electric Chain Hoist, Lug Suspension, Single-Acting 19
A3.6 Type III Electric Chain Hoist, Parallel or Right Angle Geared or Plain Trolley Suspension 19
A3.7 Type IV Electric Chain Hoist, Two-Wheel Tandem Trolley Suspension 19
A3.8 Type V Electric Chain Hoist, Hook Suspension 20
A3.9 Type VI Electric Chain Hoist, Powered Trolley Suspension 20
A3.10 Chain Guides 20
A3.11 Material 20

A4 Electrical 21
A4.1 General 21
A4.2 Electrical Equipment Characteristics 21

A5 Testing, Marking, and Data 21
A5.1 Testing 21
A5.2 Marking 23
A5.3 Data 23

A6 Typical Hoist Inquiry Data 24
A6.1 Acquisition 24

Tables
A1 Hook Throat Openings 18
A2 Electromagnetic Environment 22

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

PERFORMANCE REQUIREMENTS FOR ELECTRIC CHAIN HOISTS USED IN MARINE AND OTHER APPLICATIONS AS REQUIRED BY THE U.S. DEPARTMENT OF DEFENSE (DOD)

A1 GENERAL

A1.1 Scope

This Appendix provides performance requirements beyond those cited in ASME HST-1-1999 for electric chain hoists for use in marine and other applications as required by the Department of Defense (DOD).

This Appendix, in conjunction with ASME HST-1-1999, is replacing the requirements of MIL-H-15317 for Electric Chain Hoists.

A1.2 Classification

Chain electric powered hoists shall be of the following types, as specified [see para. A6.1(b)]:

Type I	Electric Chain Hoist, Lug Suspension, Double-Acting.
Type II	Electric Chain Hoist, Lug Suspension, Single-Acting.
Type III	Electric Chain Hoist, Parallel or Right Angle Geared or Plain Trolley Suspension.
Type IV	Electric Chain Hoist, Two-Wheel Tandem Trolley Suspension.
Type V	Electric Chain Hoist, Hook Suspension.
Type VI	Electric Chain Hoist, Powered Trolley Suspension.

A1.3 Definitions

brittle material: material showing less than 10% elongation in gauge length for the tensile test specimen.

continuous operation: lifting and lowering through the full hoisting range a rated load at the specified lifting and lowering speeds.

excessive wear: wear that is sufficient to impair safe operation of the hoist. The following conditions define excessive wear:

(a) increase in chain wheel pocket dimension in excess of 10%;

(b) increase in clearance tolerance between shaft and bearing in excess of 15%;

(c) life-lubricated bearings requiring lubrication;

(d) load-brake lining reduced in excess of 50% of useful life;

(e) reduction of bar diameter of link chain in excess of 10%;

(f) reduction of wall thickness for rollers and pins of roller chain in excess of 10%;

(g) reduction in gear tooth thickness of reduction gear drive in excess of 10%.

recovered materials: materials that have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials.

A1.4 References to Other Codes and Standards

Refer to the following publications, copies of which may be obtained from the publisher as indicated. The edition bearing the latest date of issue shall be used.

AGMA 6010, Standard for Spur, Helical, Herringbone, and Bevel Enclosed Drives

AGMA 6034, Practice for Enclosed Cylindrical Worm Gear Speed Reducers and Gear Motors

Publisher: American Gear Manufacturers Association (AGMA), 1500 King Street, Alexandria, VA 22314

ASTM A 48, Standard Specification for Gray Iron Castings (DOD adopted)

ASTM A 143, Standard Practice for Safeguarding Against Embrittlement of Hot-Dip Galvanized Structural Steel Products and Procedure for Detecting Embrittlement (DOD adopted)

ASTM B 26, Standard Specification for Aluminum-Alloy Sand Castings (DoD adopted)

ASTM B 633, Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel (DOD adopted)

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

Publisher: American Society for Testing and Materials (ASTM), 100 Barr Harbor, West Conshohocken, PA 19428

IEEE Std. 45, Recommended Practice for Electric Installations on Shipboard

Publisher: The Institute of Electrical and Electronics Engineers (IEEE), 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331

UL 991, Tests for Safety-Related Controls Employing Solid-State Devices

Publisher: Underwriters Laboratories Inc. (UL), Publication Stock, 333 Pfingsten Road, Northbrook, IL, 60062

MIL-E-917, Electric Power Equipment, Basic Requirements

MIL-S-901, Shock Tests, H.I. (High Impact) Shipboard Machinery, Equipment, and Systems, Requirements for

MIL-C-24643, Cable and Cords, Electric, Low Smoke, for Shipboard Use, General Specification for

Publisher: Department of Defense (DoD), Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094

A2 PERFORMANCE REQUIREMENTS

A2.1 General

Performance requirements shall be in accordance with ASME HST-1-1999, and as specified in this Appendix.

A2.2 Application

Metals susceptible to corrosion attack in a sea water environment shall be treated, plated, or painted to provide corrosion resistance. In order to minimize electrolytic corrosion between dissimilar metals in contact with each other, metal-to-metal contacts shall be limited to those metals which, when coupled, are in accordance with sea water corrosion of galvanic couples requirements of MIL-E-917. If a metal is coated or plated, the coating or plating metal rather than the base metal shall be considered in metal-to-metal contact between parts that depend upon coating or plating for corrosion resistance.

When specified [see para. A6.1(c)], hooks shall be zinc plated. Zinc plating shall be in accordance with ASTM B 633, Type I, Class Fe/Zn 12. The hook throat safety device shall be constructed of noncorrosive material or treated for corrosion resistance.

When specified [see para. A6.1(d)], the load chain shall be protected from corrosion by zinc plating in accordance with ASTM B 633, Type II, Class Fe/Zn 12.

The safeguarding against and procedure for detecting embrittlement of zinc coating shall be in accordance with ASTM A 143.

A2.3 Characteristics

A2.3.1 Weight and Dimensions. Maximum weight and envelope dimensions of hoists shall be specified if important to the application [see para. A6.1(e)].

A2.4 Emergency Manual Operation

When specified [see para. A6.1(f)], hoist shall be equipped with a hand wheel attached to an extension of the electric motor shaft for emergency manual operation of the hoist. It shall be possible to declutch the hand wheel when it is not in use. An interlock shall be provided to prevent operation of the hoist electrically while the hand wheel is engaged. A pull of not more than 1 lb per 200 lb of total hoist load shall be required, to initiate movement.

A2.4.1 Hand Chain. The hand wheel described in para. A2.4 shall be operated by a removable chain, which when fitted, will have a drop of approximately 2 ft less than the specified lift of the hoist.

A2.5 Load Positioning Control

Hoist control systems shall vertically position a load to within $\pm 1/4$ in.

A2.6 Lubrication

Lubricants used shall be readily available and free of ozone depleting chemicals (ODC).

A2.7 Painting

Paints and coatings shall be lead and chromate free.

A2.8 Workmanship

The hoist shall withstand any operation specified herein without malfunction or component failure caused by faulty workmanship. Edges and surfaces exposed to operating and maintenance personnel shall be smooth and rounded so that a hazardous surface does not exist.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

TABLE A1 HOOK THROAT OPENINGS

Hoist Rated Load, lb	Hook Throat Opening, Min., in.
1,000	0.75
2,000	0.906
3,000	1.0
4,000	1.125
5,000	1.125
6,000	1.5
7,500	1.375
10,000	1.625
11,000	2.0
13,000	2.063
15,000	2.063
17,000	2.063
20,000	2.25
25,000	2.25
30,000	2.75
40,000	3.0

A2.9 Interchangeability

In no case shall parts be physically interchangeable or reversible unless such parts are also interchangeable or reversible with regard to function, performance and strength. Component parts for the same type hoists from the same manufacturer shall be interchangeable to the greatest extent possible.

A3 MECHANICAL REQUIREMENTS

A3.1 Design Stresses

Maximum combined stress in component parts shall not exceed 35% of the tensile yield strength of the material for hoist operation at rated capacity. Combined stresses in component parts shall not exceed 70% of its tensile yield strength, when the hoist is subjected to static or dynamic overload tests. For hoists requiring repair parts, all wear parts shall be readily accessible for replacement. For hoist operation, a pull of not more than 1 lb per 200 lb of total hoist load shall be exerted to initiate movement, and not more than 1 lb per 300 lb of total hoist load shall be required for manual operation of the trolley.

A3.2 Load Hooks

Hook throat openings shall be in accordance with the dimensions shown in Table A1. The hook shall be clearly marked with manufacturer identification and allowable hook load or allowable hook load designator. Positive means shall be provided to prevent the load hook from loosening due to rotation of the load. Load hooks shall be readily detachable from the load chain.

A3.2.1 Range of Load Hooks. Load hooks for hoists Types I, II, III, V, and VI shall pick up a load with the hook anywhere within a radius of 3.5 ft perpendicular to the load wheel center line and 7 ft below the wheel, without jamming or jumping the pockets of the load wheel.

Load hooks for hoists Type IV (with the arrangement specified in para. A3.7.3 and with the trolley oscillating about the wire rope on which it operates), shall be capable of picking up a load from any point within a 19 in. radius, from an imaginary perpendicular, from the point of hoist suspension to a horizontal plane 7 ft below this point (an angle of approximately 15 deg).

A3.3 Construction

Rotating shafts shall be supported in anti-friction bearings or bushings or both and shall be enclosed against entry of foreign matter. Rotating and sliding surfaces shall be lubricated. Hoists shall operate through a temperature range of −20°F through 130°F for a minimum of 3,000 cycles without a failure. Gears shall be totally enclosed in a readily accessible casing that will permit examination, servicing and cleaning. Positive means shall be provided to prevent any component working loose. Hoist parts shall be readily accessible for servicing and replacement as required.

A3.3.1 Load Chain. The chain shall provide a safety factor of at least five for the rated load based on the ultimate strength of the material.

A3.3.2 Gearing. Gears shall be manufactured in accordance with AGMA 6010 and 6034.

A3.3.3 Overtravel Protection. The lift limiting device specified in para. 3.8 of ASME HST-1-1999 shall protect against upper and lower limits of travel. Type I hoists shall not have these devices (see para. A4.2.4).

A3.3.4 Overload Protection. Overload limiting devices shall not be used in Naval applications.

A3.3.5 Load-Chain Container. When specified, the hoist shall be equipped with a container attached to the hoist for receiving the chain as it is reeved in by the chain wheel.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS Not for Resale

A3.3.6 Trolley Track. Trolley tracks for Types III and IV hoists shall be I-beam of the size and radius specified.

A3.4 Type I Electric Chain Hoist, Lug Suspension, Double-Acting

A3.4.1 Double-acting Feature. The double-acting feature shall be obtained by arranging a load chain having two free ends, to operate back and forth over a power-driven chain wheel. Either end of the chain, when fitted with a load hook, shall handle the load for which the hoist is rated. The hoist will not be required to handle load on both hooks simultaneously. Separation of the load chains, when hanging vertically, shall be a maximum, to permit free passage of the empty and loaded hooks when traveling in the hoisting or lowering directions.

A3.4.2 Control Stations. Controllers shall be operated by two pendant type push-button stations, separately suspended from the hoist. Push-button stations shall be connected in series, thus making it necessary that corresponding push-buttons be depressed simultaneously at each station, to move the load hooks in either direction. Length of one of the control cables shall be as specified [see para. A6.1(g)]. The other cable shall be of a length equal to the lift of the hoist. Each push-button station shall be provided with indicating lights. These lights shall be arranged to indicate to the controls operator which push-button has been depressed at any other Station. Enclosure shall be spraytight.

A3.5 Type II Electric Chain Hoist, Lug Suspension, Single-Acting

A3.5.1 Control Stations. Control stations shall be pendant control type or bulkhead mounted as specified [see para. A6.1(h)].

A3.6 Type III Electric Chain Hoist, Parallel or Right Angle Geared or Plain Trolley Suspension

A3.6.1 Trolleys. Trolleys shall be geared or plain, as specified [see para. A6.1(i)].

A3.6.1.1 Trolley Wheels. Trolley wheel spacing shall be suitable for use on an applicable standard "I" beam flange size. Means shall be provided to prevent the trolley wheel flanges from riding up onto the supporting beam.

A3.6.1.2 Trolley Equalizers. Means shall be provided for distributing the hoist load equally into trolley side frames.

A3.6.1.3 Trolley Track Clamps. Quick acting track clamps shall be provided for locking fully loaded hoists to the track. Hand pull required to set or release the track clamps shall not exceed 80 lb. Chain drop from beam shall be approximately 2 ft less than the specified lift of the hoist.

A3.6.2 Cable Reel. An automatic, clock spring type cable take-up reel for ceiling mounting shall be furnished for the hoist motor power supply cable.

A3.6.3 Control Stations. Control stations shall be pendant control type or bulkhead mounted as specified [see para. A6.1(h)].

A3.7 Type IV Electric Chain Hoist, Two-Wheel Tandem Trolley Suspension

A3.7.1 Load-Lifting Medium. Close link, coil type load chains shall be the load-lifting medium.

A3.7.2 Hoist Trolley. Trolleys shall operate on high grade plow steel, constant tensioned wire rope, as specified [see para. A6.1(j)]. The trolley shall not jump or fall from the wire rope under any condition. The trolley assembly shall be quickly removed from the rope for storage purposes. A hole shall be accessibly located at each end of the trolley structure to permit making a clevis connection, the clevis being located at the end of the ropes used to tow the trolley along the wire suspension. The trolley structure around the hole shall be reinforced so that pull on the clevis connection will not cause any permanent distortion.

A3.7.3 Trolley Connection to Hoist. Trolleys shall be pin connected to the hoist with a degree of freedom to permit the hoist to swing forward or backward in the direction of trolley travel. Hoist swing angle shall be limited by stops on the trolley, to prevent the hoist from making contact with the trolley wire suspension.

A3.7.4 Control Station. Motor controllers shall be operated from a pendant suspended, retractable, three-element push-button station. The retractable feature shall be provided through use of a clock spring actuated cable reel, which shall be included as part of the motor control enclosure. Push-button enclosure shall be fitted with a handle to enable the hoist operator to conveniently hold the push-button station at proper operating height.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

Enclosure shall be fitted with an eyebolt or other means for securing a reach rope, which will be used to haul the control station down to the operator. When three elements are required, the pushbuttons shall be legibly and permanently marked "**HOIST**," "**LOWER**," and "**EMERGENCY RUN**," to indicate hoist operation. The function of the "**EMRERGENCY RUN**" push-button shall be to by-pass the thermal overload device.

A3.8 Type V Electric Chain Hoist, Hook Suspension

A3.8.1 Mounting. Mounting hooks shall have a spring loaded type safety gate resting against the tip of the hook. Safety gate shall be of sufficient strength to withstand a pull against the safety gate equal to the weight of the fully loaded hoist.

A3.8.2 Control Stations. Control stations shall be pendant control type or bulkhead mounted as specified [see para. A6.1(h)].

A3.9 Type VI, Electric Chain Hoist, Powered Trolley Suspension

A3.9.1 Hoist Trolley Connection. Hoists shall be suspended from their trolleys by means of a pin connection that will permit the hoist body to swing a maximum of 15 deg fore and aft in direction of trolley travel. When the hoist is allowed to swing, it shall be so restrained that no part of the hoist will contact the load lifting medium. Trolley motor and gearing, as specified herein, shall be attached to the hoist so as to permit the front of the hoist to approach the end of the trolley track, with the intent of bringing the hanging load chain as close to the end of the track as practicable.

A3.9.2 Load Attachment Device. The lifting end of the load chain shall be fitted with a swivel connection device.

A3.9.3 Power-Operated Trolley. Trolleys shall be positive traversing, shall operate on a standard I-beam, and shall traverse the hoist along the track through a speed of 0 to 40 ft/min with rated load. Trolley shall drive the hoist with rated load along a track tilted and inclined ±15 deg from horizontal. For this requirement, overloading of the trolley drive motor up to 50% of its rated capacity for 20 min during ship rolling and pitching conditions, will be acceptable.

A3.9.4 Positive Traversing Feature. To provide positive traversing of the hoist, the trolley shall be equipped with a sprocket, rotating in vertical plane, and driven by the trolley motor. Sprocket shall engage a strip of roller type chain attached to the flange of the I-beam trolley track. The roller chain shall be of the length as specified, and shall be suitable for tack welding to the flange of the I-beam. This arrangement shall ensure that the hoist and trolley, when stopped, will hold its position on the trolley track. A brake, attached to the sprocket shaft or nonoverhauling worm gears, shall be provided.

A3.9.5 Hoist and Trolley Control Station. Hoists and trolleys shall be operated by a pendant type hand held or bulkhead mounted control station, as specified. Control station design shall incorporate a four-element push-button circuit with the dead man feature (push-buttons automatically return to off position when released). Two push-buttons shall be marked "**Hoist**" and "**Lower**" for hoisting and lowering operations and the other two push-buttons shall be identified with arrows "◀" "▶" and color coded to indicate direction of trolley operation. Corresponding color coded arrows shall be affixed to the hoist and shall be visible from all operating positions of the hoist. If the control station is bulkhead mounted, the control leads shall be fed from a cable reel as specified herein (see para. A3.6.2).

A3.10 Chain Guides

Enclosed chain guides shall be provided to ensure that the hoist load chain enters the sprocket in the proper position to prevent misalignment or jamming of the hoist load chain and sprocket. These guides, if bolted on, shall have means to prevent loosening under vibration.

A3.11 Material

Material used on hoists and their components shall be of sufficient hardness and strength to withstand intended use and applicable tests.

A3.11.1 Recycled, Recovered, or Environmentally Preferable Materials. Recycled, recovered (see para. A1.3), or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS Not for Resale

A3.11.2 Prohibited Material. Cadmium, asbestos, beryllium, brittle materials (see para A1.3), and magnesium or magnesium based alloys (except steel or aluminum alloys that contain less than 0.5% magnesium) shall not be used unless otherwise specified. Welded aluminum 6061-T6, 2XXX, and 7XXX material shall not be used.

A3.11.3 Cast Iron. Cast iron shall not be used for load bearing parts. Cast iron for non-load bearing parts shall be in accordance with ASTM A 48, Class 35 or better.

A3.11.4 Aluminum. Aluminum castings, if used, shall be in accordance with ASTM B 26.

A4 ELECTRICAL

A4.1 General

Motors, controllers, brakes, and power supply cable shall be in accordance with IEEE Std. 45 and, when specified [see para. A6.1(k)], shall withstand high impact, grade A shock (see para. A5.1.1). If shock testing is specified, the supply power cable shall be in accordance with MIL-C-24643.

A4.1.1 Hazardous Locations. When hoists are used in hazardous locations as defined by IEEE Std. 45 or other special codes, modifications or additional safety precautions not covered by this Appendix may be required.

A4.2 Electrical Equipment Characteristics

A4.2.1 Motors. Temperature rise of motors shall be in accordance with IEEE Std. 45 for the class of insulation and enclosure used.

A4.2.2 Hoist Brakes. Hoists shall be equipped with an electric brake, and except Type I, a load brake. The load brake shall be provided to prevent operation of the hoist in the lower direction unless power is applied, and it shall be independent of the electric brake. The electrical brake shall stop and safely hold 150% of the hoist rated load at any operating speed. The electrical brake shall hold a static load equal to 200% of the hoist rating.

When specified [see para. A6.1(l)] manual release of the electric brake shall be provided to permit manual operation by the hand wheel as specified herein (see para. A2.4).

A4.2.3 Operator's Control Station. Push-button controls shall be momentary contact type (spring return to the "**OFF**" position when released). Push-button controls shall be fully enclosed in a shock resistant, watertight case, with rounded corners. Enclosure shall be watertight.

A4.2.4 Lower Limit Switch. A lower limit switch shall be provided on Type I hoists to prevent the load hook from over travel. The switch shall be arranged to automatically stop the hoist motor and apply the motor brake when the hook reaches its lower travel limit position. The lower limit switch shall ensure stopping the load hook with not less than two complete turns of rope remaining on the drum.

A4.2.5 Control Enclosures. Control enclosures, unless otherwise specified [see para. A6.1(m)], shall be NEMA Type 12 in accordance with IEEE Std. 45.

A4.2.6 Speed Governor. When specified [see para. A6.1(n)], Type I hoists shall be equipped with a centrifugal type speed governor to limit lowering speed to a maximum of 80 ft/min. Stopping of the hoist shall be accomplished by the electric brake specified herein (see para. A4.2.2).

A4.2.7 Electromagnetic Interference and Compatibility. Hoist electrical equipment shall operate satisfactorily under the electromagnetic environment specified in Table A2.

A5 TESTING, MARKING, AND DATA

A5.1 Testing

A5.1.1 High Impact Shock. When specified, hoists shall undergo the high impact shock test in accordance with the requirements of MIL-S-901. Resilient mountings shall not be used. Trolley hoists shall be secured only by their own track clamps. Trolley hoists and hook suspension hoists shall be mounted in their normal position. Type V hoists shall be tested in the stowed position (horizontal attitude), constrained (not fastened) to prevent lateral movement, and clamped or strapped to resist vertical movement and to prevent test unit from becoming a missile hazard to test personnel. Hoists shall have the load hook retracted for the test. The chain shall be looped in bights not to exceed 2 ft, and secured in or lashed to the load hook during the test. Test fixture for mounting the hoist shall conform, as applicable, to the deck-platform or bulkhead mounting figures shown in MIL-S-901. A request to

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

TABLE A2 ELECTROMAGNETIC ENVIRONMENT

Frequency Range	Units	
Communications 250 kHz to 30 MHz	V/m 50	
Radar:	Average (mW/cm^2)	Peak (mW/cm^2)
200 MHz to 225 MHz	7	1,600
400 MHz to 450 MHz	5	300
850 MHz to 942 MHz	12	400
1.215 GHz to 1.365 GHz	3	3,900
2.7 GHz to 3.7 GHz	78	32,000
5.4 GHz to 5.9 GHz	2	1,400
16.3 GHz to 33 GHz	1	1,000

deviate from the test fixture, for mounting hoists differing from those specified, shall be submitted to the contracting activity. Shock tests shall comply with the requirements as specified. Following successful completion of high-impact shock test, the hoist shall be subjected to the following tests:

A5.1.2 Load. Hoists with overload protection devices shall demonstrate its ability to lift and hold a load equal to $1\frac{1}{2}$ times its rated capacity without slippage.

A5.1.2.1 Static Load. Hoists shall support a static load of twice the maximum rated capacity for a period of 10 min. This load shall be suspended with the hoist load chain extended to the limit of the hoist's rated lift height. This extension may be changed to a minimum of 1 ft provided the contractor demonstrates that the entire length of chain is capable of 200% load. The suspended test load shall be held by the hoist brake.

A5.1.2.2 Dynamic Load. Hoists shall be loaded to 150% of rated capacity and operated by hoisting and lowering the test load through the full operating range. Trolley type hoists shall be operated back and forth over a section of track, 8 ft or more in length, with the 150% load in suspension. This test shall be performed 10 times. Hoists and trolleys shall operate satisfactorily and brakes shall exhibit no sign of slippage.

A5.1.3 Operating. Hoists shall be tested to determine that they are satisfactory for operation with rated loads as follows:

(a) Hoisting Speed. Hoists shall be operated for approximately 90% of lift height, to verify conformance with the hoisting speed requirements.

(b) Lowering Speed. Hoist load hooks shall be lowered at a maximum speed of 80 ft/min and timed to determine conformance with the speed governor requirements.

(c) Travel Limit. Hoists shall be operated in the up and down directions so as to engage the limit switches to demonstrate hoist ability to prevent load hook overtravel.

(d) Load Positioning Control. Hoists shall demonstrate their capability of accurately positioning a load. The test shall be conducted by establishing a reference height and then jogging the load to a position $\pm\frac{1}{4}$ in. above and below the reference height. Repeat each test at least six times. Each positioning shall be accomplished by energizing the motor not more than six times.

(e) Performance. Hoists shall be continuously operated at maximum speed (80 ft/sec) through approximately 90% of lift height for a period of not less than 30 min. During this test, the hoist shall operate satisfactorily without any indication of malfunction.

A5.1.4 Manual Operation. Hoists shall be tested to demonstrate:

(a) The ability to lift and lower, through the full hoisting range, a rated load by means of the handwheel arrangement.

(b) The interlock prevents electrical operation.

A5.1.5 Electromagnetic Interference Measurements. Electromagnetic interference testing shall be done in accordance with UL 991.

A5.1.6 Geared Trolley Traverse. On Type III geared trolley hoists, a pull of not more than 1 lb per 200 lb of total hoist load shall be exerted on the hand chain to initiate movement of the hoist load and a pull of not more than 1 lb per 300 lb to initiate hoist and trolley movement.

A5.1.7 Track Clamp. Track clamps on Type III hoists shall be tested by subjecting the loaded hoist to a pull equal to one-third of the rated capacity of the hoist. The pull shall be exerted in either direction parallel to the trolley tracks. Clamps shall hold the loaded hoist from moving in either direction when the trolley track is in a horizontal position. Track clamps shall have no sign of slipping or of permanent deformation.

A5.1.8 Fleet Angle. Hoists shall demonstrate their ability to pick up a load with the hook attached to the load at 3.5 ft out from an imaginary perpendicular 7 ft below the hoist. Chain hoists shall accomplish this

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS Not for Resale

without the chain jamming or jumping the pockets of the load wheel. The lift shall be conducted four times, once forward, once aft, and once on each side of the hoist.

A5.1.9 Trolley Test for Type IV Hoist. Hoist trolleys shall be tested to demonstrate their capability of maintaining its positioning on the wire rope on which it operates under the following conditions:

(a) With the hoist attached to the trolley and load hook empty, oscillating the suspended hoist ten times about the axis of the wire rope through an included angle of 70 deg (35 deg on either side).

(b) Repeat (a) with rated load.

(c) Repeat (a) with 150% rated load.

(d) Demonstrate the hoist capability to pick up a load in any direction that is at an angle of 15 deg from the point of hoist suspension to a perpendicular, from the same point on the hoist (see para. A3.2.1).

(e) Plain Trolley Test. The pull required to move the capacity-loaded hoist (plain trolley suspension) along a straight portion of track shall be determined by attaching a wire rope or cord to the trolley so that the pull is exerted parallel to the track, and then over a sheave hanging from the track at a reasonable distance from the trolley, and measuring the required pull by means of weights or spring balance attached to cable or cord. Failure to comply to the requirements for maximum pull to traverse the hoist shall constitute failure of this test.

(f) Geared Trolley Test. The pull required on geared trolley hand chain to move a capacity-loaded hoist (gear trolley suspension) along a straight portion of track shall be determined by attaching weights or a spring balance to the hand chain. Failure to comply to the requirements for maximum pull to traverse the hoist shall constitute failure of this test.

(g) Hand Operation. The hoist and the trolley of Types III, IV, and VI shall be operated by hand on straight and curved track with rated load. A pull of not more than 1 lb per 200 lb of hoist load shall be required to initiate movement, and not more than 1 lb per 300 lb of hoist load shall be required to sustain movement.

A5.1.10 Mounting Hook for Type V Hoist. The safety gate of the mounting hook shall demonstrate its ability to hold a load equal to the weight of the fully loaded hoist. This hook shall be attached to a padeye of sufficient strength and a cable shall be rigged through the hook and safety gate to a load equal to the weight of the fully loaded hoist. The safety gate shall hold this load (without assistance from the hook) without any distortion and shall operate properly upon removal of the load.

A5.1.11 Trolley for Type VI Hoist. Powered trolley hoists shall be subjected to the following tests to determine capability of trolley operation:

(a) Traversing Speed Test. The power-operated trolley shall traverse the hoist with rated load along a horizontal trolley track, simulating a ship at an even keel to verify compliance with the traversing speed specified.

(b) Trolley Drive Test (rolling conditions). The trolley shall traverse the loaded hoist on a trolley track inclined at an angle of 15 deg from a horizontal centerline, to verify satisfactory operation during ship rolling. The trolley will not be required to operate at a specified speed on this incline but shall move along steadily.

(c) Trolley Brake Test. With the hoist fully loaded and the trolley on an inclined and tilted track at an angle of 15 deg, it shall be demonstrated that when stopped, the trolley shall maintain its position on the track by means of the braking arrangement specified in para. A3.9.4.

A5.1.12 Endurance. Hoists shall be subjected to 3,000 cycles of continuous operation (see para. A1.3). After completion of the above tests, gears, chain, bearings, chain sprockets, brakes, and other wearing parts shall be examined for excessive wear (see para A1.3).

A5.2 Marking

A5.2.1 Identification. In addition to the requirements in para. 5.2.3 of ASME HST-1-1999, hoists shall be identified with the following:

(a) hoist weight and shock grade, as applicable;
(b) type, as applicable;
(c) rated load;
(d) ASME HST-1 Appendix A;
(e) national stock number (NSN) (if established);
(f) contract or order number; and
(g) date of manufacture.

A5.3 Data

A5.3.1 Technical Manuals. When specified [see para. A6.1(o)], the manufacturer shall prepare technical manuals in accordance with the data ordering documents and include the following:

(a) complete list of material;

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

(b) identification of each component for replacement; and

(c) final drawings.

A6 TYPICAL HOIST INQUIRY DATA

A6.1 Acquisition

In addition to the typical hoist inquiry data of ASME HST-1-1999, acquisition documents must specify the following:

(a) Appendix A, ASME HST-1-1999;

(b) type of hoist required (see para. A1.2);

(c) if zinc coating of hooks is required (see para. A2.2);

(d) whether zinc plating is required for load chain (see para. A2.2);

(e) maximum weight and dimensions required (see para. A2.3.1);

(f) whether manual operation is required (see para. A2.4);

(g) length of control cable required for Type I hoist (see para. A3.4.2);

(h) type of control station, if other than pendant control (see paras. A3.5.1, A3.6.3, and A3.8.2);

(i) geared or plain trolley on Type III hoists (see para. A3.6.1);

(j) Type IV hoist trolley requirements (see para. A3.7.2):

(1) size and type of wire rope required;

(2) speed and acceleration rates;

(3) load pull on clevis connection;

(k) whether shock resistance grade A is required (see para. A4.1);

(l) whether manual brake release is required (see para. A4.2.2);

(m) control enclosures if other than specified (see para. A4.2.5);

(n) whether speed governor is required (see para. A4.2.6); and

(o) if technical manual is required (see para. A5.3.1).

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

NONMANDATORY APPENDIX B
TYPICAL EXAMPLES OF HOIST CLASS SELECTION

B1 TYPICAL EXAMPLES OF HOIST CLASS SELECTION

B1.1 Example No. 1

(a) Application. The hoist is to be used for machine shop work, to be operated no more than 10% of the time with no more than 50 starts/hr and will have randomly distributed loads. No unusually heavy work periods are expected.

(b) Selection. A review of Table 1 shows that hoist utilization does not exceed that specified for Class H2. Class H2 can be specified with no further analysis needed.

B1.2 Example No. 2

(a) Application. Same as Example No. 1 except the hoist will be used periodically to unload a truck. It is estimated that it will take up to 1 hr to unload the truck, with the hoist running 50% of that time.

(b) Selection. The normal utilization still falls within the Class H2 rating. However, the periodic unloading of the truck of steel would require the necessity of specifying Class H3 (see Cols. 5 and 6 of Table 1).

B1.3 Example No. 3

(a) Application. A foundry hoist is to be used to handle raw castings for storage. Two basic sizes of castings will be handled, one weighing 300 lb (136 kg), and the other 1,500 lb (681 kg). A 1 ton (908 kg) capacity hoist is being considered. It is estimated that it will take 15 min of running time per hour to handle the duty cycle, and that out of the 15 min, the hoist will be operating 50% of the time with 1,500 lb (681 kg) on the hook, 25% with 300 lb (136 kg), and 25% with no load, with a maximum of 150 starts/hr.

(b) Selection. The load distribution is not randomly distributed. Therefore, choosing a hoist directly from Col. 2 of Table 1 could lead to incorrect selection. Tentatively select a Class H3 hoist, based on the 15 min utilization time. Calculate mean effective load K as follows:

$$K = \sqrt[3]{(0.75^3 \times 0.50) + (0.15^3 \times 0.25) + (0^3 \times 0.25)}$$

$$K = 0.60$$

K is less than 0.65, so that selection is correct.

B1.4 Example No. 4

(a) Application. Basically the same as Example No. 3, except that the user has decided to purchase a $\frac{3}{4}$ ton (681 kg) capacity hoist.

(b) Selection. Following the same procedure as in Example No. 3:

$$K = \sqrt[3]{(1.0^3 \times 0.5) + (0.2^3 \times 0.25) + (0^3 \times 0.25)}$$

$$K = 0.79$$

K is in excess of 0.65 and the selection is incorrect.

B1.5 Example No. 5

(a) Application. An electric chain hoist is to be used for dipping several racks of parts into a series of tanks. Racks are 3.5 ft (1.1 m) high and about 0.5 ft (0.2 m) clearance is required over the edge of the tank so that the total lift distance is 4 ft (1.2 m). The operation is repetitive requiring 50 lift-lower cycles/hr. The total load is 500 lb (227 kg) including racks. Empty racks weigh 80 lb (36 kg). The hoist is operating 90% of the time with 500 lb (227 kg) and 10% of the time with 80 lb (36 kg).

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

(b) Selection. A ½ ton (454 kg) hoist has been selected.

$$K = \sqrt[3]{(0.5^3 \times 0.90) + (0.08^3 \times 0.10)}$$

$K = 0.48$, which is less than 0.65

Selection of ½ ton (454 kg) capacity was correct. Total lifting and lowering distance/hr equals:

4 ft × 2 × 50 = 400 ft/hr (122 m/hr)

A hook speed of 15 ft/hr (4.6 m/mm) is selected. The resulting "**ON**" time per hour is: 400.15 = 27 min/hr, which requires the use of a Class H4 hoist. The user estimated that five starts are required per lift-lower cycle resulting in 250 starts/hr, also requiring a Class H4 hoist. Note that the selection of a 30 ft/min (9.2 m/min) hook speed would result in a 13 min/hr "**ON**" timel, but the hoist would still have to be Class H4 because of the 250 starts/hr.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

AMERICAN NATIONAL STANDARDS FOR HOISTS, PALLETS, AND TRANSMISSION CHAINS

Performance Standard for Electric Chain Hoists HST-1-1999
Performance Standard for Hand Chain Manually Operated Chain Hoists HST-2-1999
Performance Standard for Manually Lever Operated Chain Hoists HST-3-1999
Performance Standard for Overhead Electirc Wire Rope Hoists HST-4-1999
Performance Standard for Air Chain Hoists..... HST-5-1999
Performance Standard for Air Wire Rope Hoists..... HST-6-1999

The ASME Publications Catalog shows a complete list of all the Standards published by the Society. For a complimentary catalog, or the latest information about our publications, call 1-800-THE-ASME (1-800-843-2763).

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale