Recognized as an
American National Standard (ANSI)

IEEE Std 620-1996
(Revision of IEEE Std 620-1987)

IEEE Guide for the Presentation of Thermal Limit Curves for Squirrel Cage Induction Machines

Sponsor

Electric Machinery Committee
of the
IEEE Power Engineering Society

Approved 20 June 1996

IEEE Standards Board

Approved 25 August 1999

A**merican National Standards Institute**

Abstract: Thermal limit curves for induction machines are defined. A procedure is established for the presentation of these curves, and guidance for the interpretation and use of these curves for machine thermal protection is provided.
Keywords: machine thermal protection, rotor cage windings, stator cage windings, thermal limit curves, three-phase squirrel cage induction machines

---

The Institute of Electrical and Electronics Engineers, Inc.
345 East 47th Street, New York, NY 10017-2394, USA

Copyright © 1995 by the Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 1995. Printed in the United States of America

ISBN 1-55937-

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

--`,,-`-`,,`,,`,`,,`---

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS

Not for Resale

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Board. Members of the committees serve voluntarily and without compensation. They are not necessarily members of the Institute. The standards developed within IEEE represent a consensus of the broad expertise on the subject within the Institute as well as those activities outside of IEEE that have expressed an interest in participating in the development of the standard.

Use of an IEEE Standard is wholly voluntary. The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation. When a document is more than five years old and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of all concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.

Comments on standards and requests for interpretations should be addressed to:

Secretary, IEEE Standards Board
445 Hoes Lane
P.O. Box 1331
Piscataway, NJ 08855-1331
USA

Note: Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying all patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention.

Authorization to photocopy portions of any individual standard for internal or personal use is granted by the Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; (508) 750-8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

Introduction

(This introduction is not part of IEEE Std 620-1996, IEEE Guide for the Presentation of Thermal Limit Curves for Squirrel Cage Induction Machines.)

This revision of IEEE Std 620-1987 was initiated by the Induction Machinery Subcommittee of the Electric Machinery Committee of Power Engineering Society. The standard was originally issued in 1981 for trial-use only and had expired. Further, it was felt that the revised standard of 1987 needed to be issued as a guide.

The following is a list of participants in the Working Group:

Nirmal K. Ghai, *Chair*

Michael J. Costello
James H. Dymond
Jonathan D. Gardell
Franklin H. Grooms
James R. Michalec
Nils E. Nilsson
James Oliver

At the time IEEE Std 620-1996 was balloted, the Induction Machinery Subcommittee had the following membership:

Nirmal K. Ghai, *Chair*

Lloyd W. Buchanan
Stanley S. Burns
Douglas H. Cashmore
C. C. Chan
Jack L. Craggs
Jan A. DeKock
Paul Diamant
James H. Dymond
Steve Eiring
Ray Findlay
Paul C. Gaberson
Franklin H. Grooms
Robert J. Harrington
John Hsu
Thomas A. Higgins
Howard E. Jordan
J. Glen Karolyi
James A. Kirtley, Jr
Sian H. Lie
Thomas A. Lipo
Walter J. Martiny
Nigel P. McQuin
Edward J. Michaels
James R. Michalec
Nils E. Nilsson
Paul I. Nippes
Donald W. Novotny
Chee-Mung Ong
Edward L. Owen
Pragasen Pillay
Michel Poloujadoff
M. A. Rahman
Randy R. Schoen
A. M. Sharaf
Jan Stein
Barna Szabados
Larry Wall

The following persons were on the balloting committee:

Stanley S. Burns
Douglas H. Cashmore
C. C. Chan
Jack L. Craggs
Michael J. Costello
Jan A. DeKock
James H. Dymond
Paul C. Gaberson
Jonathan D. Gardell
Nirmal K. Ghai
Franklin H. Grooms
Robert J. Harrington
Thomas A. Higgins
John Hsu
Thomas A. Lipo
Walter J. Martiny
Edward J. Michaels
James R. Michalec
Nils E. Nilsson
James A. Oliver
Paragasen Pillay
M. Azizur Rahman
Randy R. Schoen
Jan Stein

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

When the IEEE Standards Board approved this standard on 20 June 1996, it had the following membership:

Donald C. Loughry, *Chair* **Richard J. Holleman,** *Vice Chair*
Andrew G. Salem, *Secretary*

Gilles A. Baril
Clyde R. Camp
Joseph A. Cannatelli
Stephen L. Diamond
Harold E. Epstein
Donald C. Fleckenstein
Jay Forster*
Donald N. Heirman
Ben C. Johnson
E. G. "Al" Kiener
Joseph L. Koepfinger*
Lawrence V. McCall
L. Bruce McClung
Marco W. Migliaro
Mary Lou Padgett
John W. Pope
Jose R. Ramos
Arthur K. Reilly
Ronald H. Reimer
Gary S. Robinson
Ingo Rüsch
John S. Ryan
Chee Kiow Tan
Leonard L. Tripp
Howard L. Wolfman

*Member Emeritus

Also included are the following nonvoting IEEE Standards Board liaisons:

Satish K. Aggarwal
Alan H. Cookson
Chester C. Taylor

Lisa S. Young
IEEE Standards Project Editor

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

Contents

CLAUSE PAGE

1. Overview 1

1.1 Purpose 1
1.2 Scope 1

2. Thermal overloads 2

2.1 Causes 2
2.2 Effects 2
2.3 Thermal limit curve 2

3. Presentation 4

3.1 Dependent variables 4
3.2 Current scale 4
3.3 Time scale 4
3.4 Conditions represented 4
3.5 Acceleration curve 4
3.6 Curves at multiple voltages 4
3.7 Additional information 5

4. Application 5

4.1 Caution 5
4.2 Starting from reverse rotation 5
4.3 Margins 5

5. Bibliography 6

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

IEEE Guide for the Presentation of Thermal Limit Curves for Squirrel Cage Induction Machines

1. Overview

1.1 Purpose

This guide defines thermal limit curves for induction machines, establishes a standard procedure for the presentation of these curves, and provides guidance for the interpretation and use of these curves for machine thermal protection.

1.2 Scope

This guide applies to three-phase squirrel cage induction machines, 250 hp (200 kW) and above. It is intended to be used for machines designed for specified load and application conditions. However, it may also be used for smaller, general purpose machines if application and load conditions are specified.

CAUTION

The portion of the thermal limit curves dealing with locked rotor and running overload conditions applies to all applications for a given machine. The acceleration portion of the curves when requested can be provided only if the user supplies load inertia (Wk^2), the load speed-torque curve, and the starting voltage.

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

2. Thermal overloads

2.1 Causes

The stator and rotor cage windings of a squirrel cage induction machine may exceed design temperatures due to a number of reasons, some of which are as follows:

a) The machine may lock up, i.e., remain at zero speed with voltage applied to the stator winding, as might happen in the case of low starting voltage and/or mechanical malfunction.
b) The machine may start but fail to accelerate to its running speed, due to inadequate accelerating torque at some speed lower than the breakdown torque point, causing it to run at that subsynchronous speed.
c) The machine may be overloaded continuously at close to its operating speed.

Under the locked-rotor condition, there is normally no ventilation, and the heat loss from the windings is by conduction and radiation. During acceleration, depending on the speed, the heat loss is both by conduction and by the ventilating effect of air movement. During running overloads, the normal ventilation of the machine is the primary mode of cooling.

2.2 Effects

Under locked rotor conditions, the current in the windings is 4 to 8 times the rated full-load current, and the stator winding losses are approximately 16 to 64 times the rated losses. The rotor losses are higher still at high slip values because of the increase in rotor resistance due to skin effect. Up to the breakdown torque point during acceleration, the current reduces somewhat in magnitude from the locked rotor value as the machine accelerates, but it is still many times the rated value. The stator and rotor losses are therefore high during the acceleration period. The temperatures of the stator and rotor cage windings therefore rise rapidly during the locked-rotor and acceleration conditions. The current can be maintained at any of these high values for brief periods until the winding temperatures reach values beyond which insulation, and/or winding damage, could occur. At running conditions, the overloads can be maintained for relatively longer periods of time depending on individual designs, since the currents are not as high as during starting and acceleration. Some motor loss of life is, however, experienced with each overload exceeding the thermal limit.

A knowledge of the length of safe operating time for each one of these overcurrent conditions is necessary if protection against damage due to over-temperatures is to be provided. Thermal limit curves are the vehicle for providing such information.

2.3 Thermal limit curve

A thermal limit curve is a plot of the maximum permissible safe time versus line current in the windings of the machine under conditions other than normal operation. It represents the following three situations:

a) Locked rotor
b) Starting and acceleration
c) Running overload

The complete curve, representative of these three conditions for the winding (stator or rotor) with the shortest safe time, may be discontinuous and may consist of up to three segments (see figure 1).

The thermal limit curve is intended to be used in conjunction with the machine time-current curve for a normal start to set the machine protective devices for the thermal protection of the machine during starting and running conditions. The machine time-current curves, when available, are presented on the same plot as the thermal limit curves.

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS Not for Resale

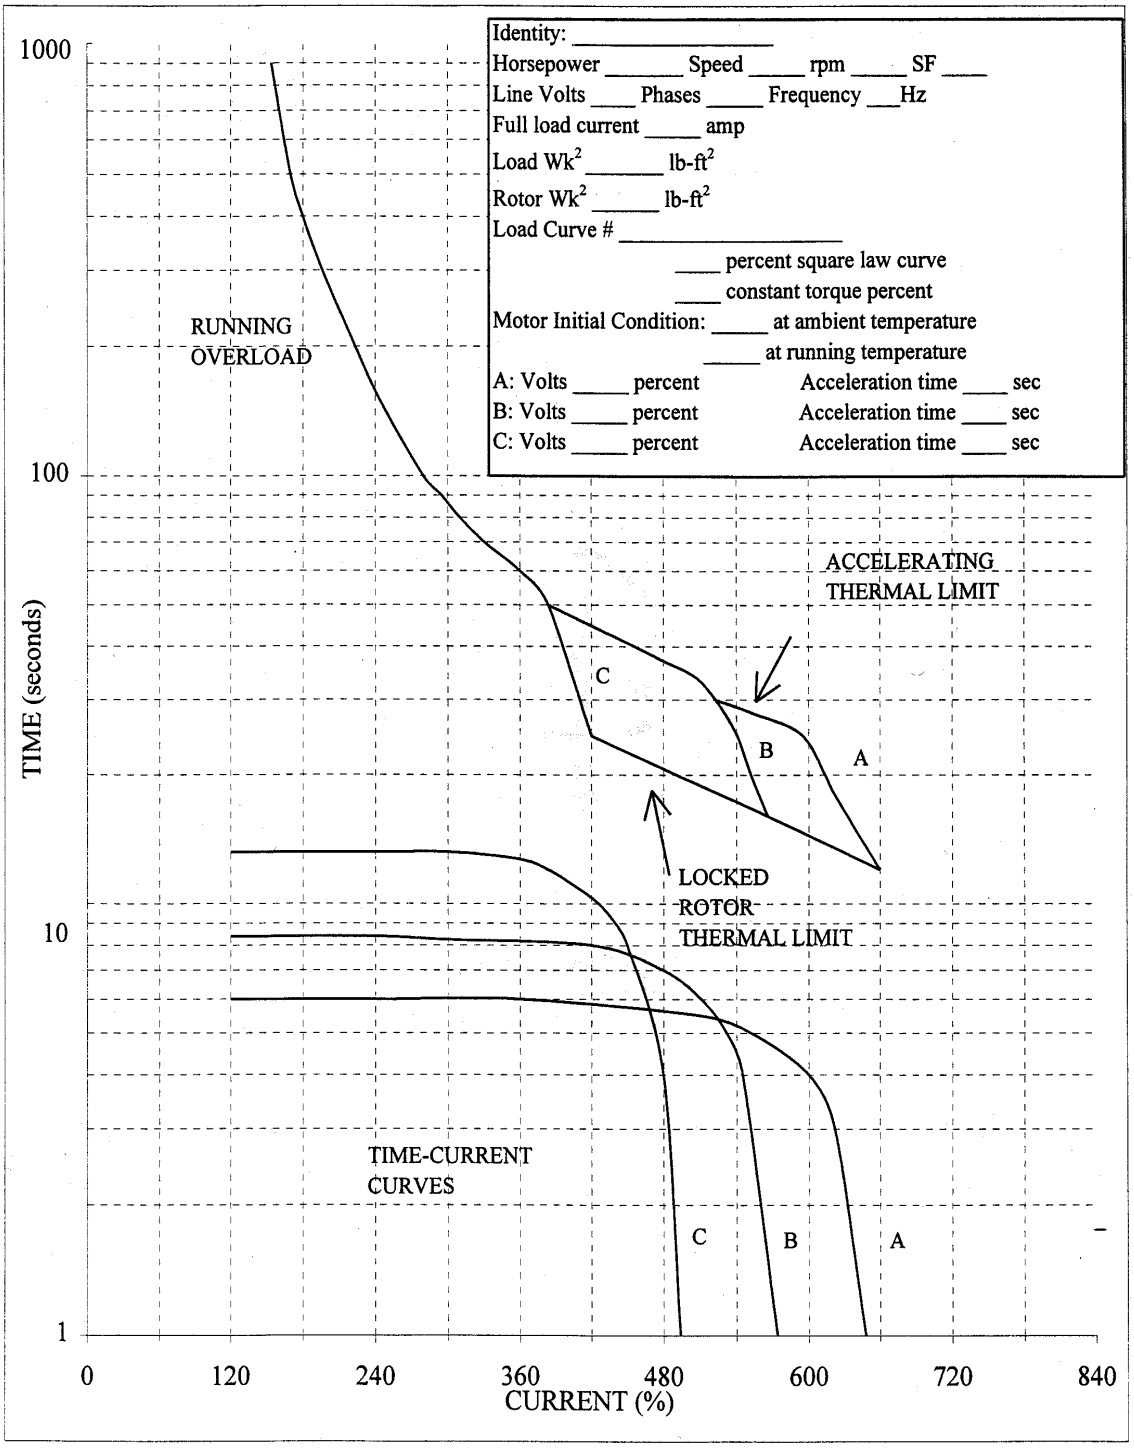

Figure 1—Typical thermal limit curves per IEEE 620-1996

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

3. Presentation

3.1 Dependent variables

The thermal limit curve shall be drawn with current as a percentage of the machine rated full-load current against the safe time in seconds.

3.2 Current scale

The current shall be plotted as the abscissa on a linear scale.

3.3 Time scale

Time shall be plotted as the ordinate on a multicycle logarithmic scale.

3.4 Conditions represented

The curve shall represent the following three conditions:

a) From approximately 60% of the locked rotor current to the rated locked rotor current, a safe locked rotor thermal capability curve shall be drawn that indicates the maximum length of time which the machine can stay locked without damage.

b) From the current at locked rotor to approximately the current at the breakdown torque point, a curve representing the thermal capability during acceleration shall be drawn.

c) From approximately the rated full-load current (or current at service factor load for motors with service factors) to current at approximately the breakdown torque, a motor running overload thermal capability curve shall be drawn.

The thermal limit curve may be continuous when a single curve adequately represents the data, or may be discontinuous with one or two breaks if necessary.

The thermal limit curves shall represent two initial conditions: the machine initially at ambient temperature, and the machine initially at the rated load operating temperature.

3.5 Acceleration curve

The motor acceleration time-current curve shall be plotted on the same graph as the thermal limit curve.

3.6 Curves at multiple voltages

When the motor is designed for starting at a voltage or voltages lower than the rated voltage, the thermal limit and the acceleration time-current curves shall be drawn for the rated voltage and for each of the lower voltages. These curves may be drawn on a single graph or on a series of graphs, one for each voltage. Curves for no more than three voltages may be represented on a single graph.

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS Not for Resale

3.7 Additional information

The following information shall appear on the same figure as the thermal limit curves (see figure1) preceded by the legend “Thermal Limit Curves Per IEEE Std 620-1996”:

a) Machine identity
b) Horsepower
c) Service factor
d) Speed
e) Line voltage
f) Number of phases
g) Frequency
h) Rated full-load current
i) Load and motor rotor inertias (Wk^2)
j) Load speed torque curve—reference number or description such as one of the following:
    1) National Electrical Manufacturers Association (NEMA) standard
    2) xx percent square law curve
    3) yy percent constant torque curve
k) Motor initial thermal condition
    1) Cold
    2) Running temperature

4. Application

4.1 Caution

The thermal limit curves are not an indication of the overload capacity of the motor, and shall not be used as a basis for planned running overload operations. Repeated operation up to the thermal limit will reduce motor life. In some cases, this reduction may be significant. Continuous operation of the stator winding above the insulation limiting temperature can reduce the life by one-half for each 10 °C that the winding temperature exceeds this limiting temperature.

If it is intended to frequently run the motor at overloads, a motor with a larger rating should be considered.

4.2 Starting from reverse rotation

Starting from reverse rotation is not addressed by this guide. Such conditions shall be a matter of agreement between the user and the manufacturer.

4.3 Margins

A margin between the locked rotor thermal limit curve and the current time curve for acceleration is desirable but may not be achievable in all applications. In such cases as large motors starting at low voltages and/or accelerating high inertia loads, a margin between the acceleration thermal limit curve and the time current curve should be the norm. If these conditions cannot be met, consultation between the manufacturer and the user is recommended.

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS
Not for Resale

5. Bibliography

This bibliography is listed in reverse chronological order of publication. While the bibliographies of IEEE standards are usually presented in alphanumeric order, the following bibliography lists first the most current and relevant references.

[B1] Chan, C. C., Lietong Yan, Pizhang Chen, Zezhong Wang, and Chau, K. T., "Analysis of Electromagnetic and Thermal Fields for Induction Motors During Starting," *IEEE Transactions on Energy Conversion*, Vol. 9, No. 1, Mar. 1994, pp. 53-60.

[B2] Dymond, James H., "Stall Time, Acceleration Time, Frequency of Starting: The Myths and the Facts," IEEE *Transactions on Industry Applications*, Vol. 29, No. 1, Jan./Feb. 1993, pp. 42-51.

[B3] Sarkar, Debasis, Mukherjee, P. K., and Sen, S. K., "Temperature Rise of an Induction Motor During Plugging," *IEEE Transactions on Energy Conversion*, Vol. 7, No. 1, Mar. 1992, pp. 116-124.

[B4] IEEE Std C37.96-1988, IEEE Guide for AC Motor Protection (ANSI).

[B5] Siyambalapitiya, D. J. T., and Tavner, P. J., "Transient Thermal Characteristics of Induction Machine Rotor Cage," *IEEE Transactions on Energy Conversion*, Vol. 3, No. 4, Dec. 1988, pp. 849-954.

[B6] Williamson, S., and Lloyd, M. R., "Cage Rotor Heating at Standstill," *IEEE Proceedings*, Vol. 134, Pt. B, No. 6, Nov. 1987, pp. 325-332.

[B7] Zocholl, S. E., Schweitzer III, E. O., and Aliangazogarra, A., "Thermal Protection of Induction Motors Enhanced by Interactive Electrical and Thermal Models," *AIEE Transactions on Power Apparatus and Systems*, Vol. PAS-103, Jul. 1984, pp. 1749-1755.

[B8] Eliasen, A. N., "High Inertia Drive Motors and Their Starting Characteristics," *IEEE Transactions on Power Apparatus and Systems*, Vol. PAS-99, No.4, Jul./Aug. 1980, pp. 1472-1482.

[B9] Eliasen, A. N., "The Protection of High Inertia Drive Motors During Abnormal Starting Conditions," *IEEE Transactions on Power Apparatus and Systems*, Vol PAS-99, No. 4, Jul./Aug. 1980, pp. 1483-1492.

[B10] Kolb, A. F., and Thom, H. W., "Motor Protection Characteristics of Ambient Insensitive Overload Devices", *IEEE Transactions on Industry Applications*, Vol. 1A-15, No. 3, May/June 1979, pp. 303-308.

[B11] Shulman, J. M., Elmore, W. A., and Bailey, K. D., "Motor Protection by Impedance Sensing," *IEEE Transactions on Power Apparatus and Systems*, Vol. PAS-97, No. 5, Sept./Oct.1978.

[B12] Bellinger, T. F., "Running Overload Protection for Motors—Pt. 2," *Allis-Chalmers Engineering Review*, Vol. 40, No. 1, 1975, pp. 28-31.

[B13] Regotti, A. A., and Russell, Jr., J. D., "Thermal Limit Curves for Large Squirrel Cage Induction Motors," IEEE PCIC Conference Paper No. PCI-74-26, Sept. 1974.

[B14] Boothman, D. R., Elgar, E. C., Rehder, R. H., and Woodall, R. J., "Thermal Tracking, a Rational Approach to Motor Protection," *IEEE Transactions on Power Apparatus and Systems*, Vol. PAS-93, Sept./ Oct.1974, pp. 1335-1344.

[B15] Bellinger, T. F., "Running Overload Protection for Motors—Pt. 1," *Allis-Chalmers Engineering Review*, Vol. 39, No. 2, 1974, pp. 27-31.

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS Not for Resale

[B16] Nailen, R. L., “Safe Locked Rotor Time: How Safe Is It?” *IEEE Transactions on Industry and General Applications*, Vol. IGA-7, Nov./Dec. 1971, pp. 708-712.

[B17] “Built-in Overheat Protection for 3-Phase Motors,” *Electrical Manufacturing*, August 1968.

[B18] Moore, R. C., “Protecting Motor Windings with Thermal Detectors,” *Allis-Chalmers Engineering Review*, Vol. 29, No. 3, 1964, pp. 24-27.

[B19] Martiny, W. T., McCoy, R. M., and Margolis, H. B., “Thermal Relationships in an Induction Motor Under Normal and Abnormal Operations,” *AIEE Transactions on Power Apparatus and Systems*, Apr. 1961, pp. 66-78.

[B20] White, A. P., “Motor Thermal Protection, Machine Design,” *The Electric Motor Book*, 1961 ed.

[B21] Yeaple, F., “Which Heat Protection for Motors?” *Product Engineering*, Sept. 2, 1960.

[B22] Gafford, B. N., “Thermal Synthesis Relay is Best Replica of Motor Heating,” *IEEE Transactions on Power Apparatus & Systems*, Vol. 78, June 1959, pp. 288-295.

[B23] Vaughn, V. G., and White, A. P., “New Hotter Motors Demand Thermal Protection,” *Electrical Manufacturing*, Feb. 1959.

[B24] Heidbreder, J.F., “Induction Motor Temperature Characteristics,” *IEEE Transactions*, pp. 800-804, Oct. 1958.

[B25] Sterns, F. P., “The Case for Inherent Overheat Protection for Motors,” *Electrical Manufacturing*, Feb. 1952.

[B26] Veinott, C. G., and Schaefer, L. C., “Fundamental Theory of Inherent Overheating Protection Under Running Overload Conditions,” *AIEE Transactions*, Vol. 68, Pt. 1, 1949, pp. 266-272.

[B27] Nilsson, N. E., “Induction Motor Starting,” *Handbook of Electric Motors*, edited by R. H. Engelmann and W. Middendorf. New York: Marcel Dekker, 1994, pp. 457-500

Copyright The Institute of Electrical and Electronics Engineers, Inc.
Provided by IHS under license with IEEE
No reproduction or networking permitted without license from IHS Not for Resale