STD·ASME B29·15M-ENGL 1997 ■ 0759670 0587282 055 ■

ASME B29.15M-1997
(Revision of ASME B29.15M-1995)

# STEEL ROLLER TYPE CONVEYOR CHAINS, ATTACHMENTS, AND SPROCKET TEETH

AN AMERICAN NATIONAL STANDARD

The American Society of Mechanical Engineers

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

STD.ASME B29.15M-ENGL 1997 ■ 0759670 0587283 T91 ■

The American Society of Mechanical Engineers

AN AMERICAN NATIONAL STANDARD

# STEEL ROLLER TYPE CONVEYOR CHAINS, ATTACHMENTS, AND SPROCKET TEETH

ASME B29.15M-1997
(Revision of ASME B29.15M-1995)

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

Date of Issuance: October 31, 1997

This Standard will be revised when the Society approves the issuance of a new edition. There will be no addenda or written interpretations of the requirements of this Standard issued to this edition.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Consensus Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment which provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable Letters Patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations issued in accordance with governing ASME procedures and policies which preclude the issuance of interpretations by individual volunteers.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
345 East 47th Street, New York, NY 10017

Copyright © 1997 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All Rights Reserved
Printed in U.S.A.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

# FOREWORD

(This Foreword is not part of ASME B29.15M-1997.)

Chains of the type covered by this Standard were introduced late in the nineteenth century. These chains met with considerable success on material conveyors and elevators. Manufacturers developed and marketed many sizes and types in the following years.

In the 1920s, a working group from the producers of these chains was formed to standardize them. In 1972, a subcommittee of American National Standards Committee B29 was appointed with American Chain Association members from the engineering steel chain industry to expand and update the existing standards.

The 1997 revision of this Standard incorporates the new definition of Minimum Ultimate Tensile Strength (M.U.T.S.), as well as updated sprocket symbols.

This revision was approved by the American National Standards Institute on April 17, 1997.



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

# ASME STANDARDS COMMITTEE B29
# Chains, Attachments, and Sprockets for Power Transmission and Conveying

(The following is the roster of the Committee at the time of approval of this Standard.)

## OFFICERS

**C. B. Norberg,** *Chair*
**R. H. Uttke,** *Vice Chair*
**J. L. Wright,** *Vice Chair*
**K. M. Padilla,** *Secretary*

## COMMITTEE PERSONNEL

**E. B. Beardslee,** Beardslee Transmission Equipment Co., Long Island City, New York
**L. E. Hampel,** Allied-Locke Industries, Inc., Dixon, Illinois
**J. Kane,** U.S. Tsubaki Inc., Holyoke, Massachusetts
**C. McDonald,** Jervis B. Webb Co., New Hudson, Michigan
**D. Moore,** Jeffrey Chain Co., Morristown, Tennessee
**C. B. Norberg,** Consultant, Ithaca, New York
**V. D. Petershack,** Hitachi Maxco Ltd., Oconomowoc, Wisconsin
**R. A. Reinfried,** Conveyor Equipment Manufacturers Association, Manassas, Virginia
**S. Rhoad,** Webster Industries, Inc., Tiffin, Ohio
**K. J. Smith,** Drives, Inc., Fulton, Illinois
**R. H. Uttke,** Rexnord Corp., Milwaukee, Wisconsin
**J. L. Wright,** Consultant, Indianapolis, Indiana
**D. N. Zwiep,** Worcester Polytechnic Institute, Worcester, Massachusetts



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

# CONTENTS

Foreword ..... iii
Standards Committee Roster ..... v

**1 Definitions** ..... 1

**2 General Chain Proportions and Designations** ..... 1

**3 Dimensions of Chain Links** ..... 1

**4 Attachment Dimensions** ..... 1

**5 Sprocket Tooth Form** ..... 1

**Figures**
1 Steel Roller Type Conveyor Chains ..... 2
2 Dimensions of Chain Links ..... 4
3 Sprocket Tooth Form ..... 5

**Tables**
1 General Chain Dimensions, M.U.T.S., Strand Length, and Measuring Load ..... 3
2 Maximum and Minimum Controlling Dimensions for Interchangeable Chain Links ..... 5
3 Chain Clearance Dimensions ..... 6
4 A-1 Attachments ..... 7
5 A-2 Attachments ..... 8
6 A-42 Attachments ..... 9
7 K-1 Attachments ..... 10
8 K-2 Attachments ..... 11
9 Sprockets — Maximum Eccentricity and Face Runout Tolerances ..... 12
10 Sprocket Factors ..... 12



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

# STEEL ROLLER TYPE CONVEYOR CHAINS, ATTACHMENTS, AND SPROCKET TEETH

## 1 DEFINITIONS

*M.U.T.S.:* Minimum Ultimate Tensile Strength, the minimum force at which an unused, undamaged chain could fail when subjected to a single tensile loading test.

*steel roller type conveyor chains:* a series of roller links having steel bushings with rollers to contact the sprocket teeth, alternating with links comprised of sidebars and pins, which articulate in the steel bushings of the roller link (see Fig. 1).

## 2 GENERAL CHAIN PROPORTIONS AND DESIGNATIONS

### 2.1 M.U.T.S.

*(a)* M.U.T.S. is not a working load. The M.U.T.S. greatly exceeds the maximum force that may be applied to the chain.

*(b)* Test Procedure: A tensile force is slowly applied, in a uniaxial direction, to the ends of the chain sample.

*(c)* The tensile test is a destructive test. Even though the chain may not visibly fail when subjected to the Minimum Ultimate Tensile Force, it will have been damaged and will be unfit for service.

Pins and bushings are fixed in the sidebar pitch holes by either press fits and/or mechanical locks, such as flats, to prevent rotation of the pins and bushings in the sidebar pitch holes.

### 2.2 Measuring Load

The measuring load in pounds or newtons, listed in Table 1, is the load under which a dry or lightly lubricated chain should be measured for length.

### 2.3 Strand Length Tolerance

New chains under measuring load may be over the theoretical length up to 0.38 in. in 120 in. (9.7 mm in 3048 mm), but must not be under the theoretical length. Maximum and minimum strand lengths for each chain are listed in Table 1.

## 3 DIMENSIONS OF CHAIN LINKS

To assure interchangeability of links as produced by the different makers of chain, standard maximum and minimum dimensions are listed in Tables 2 and 3. They are not actual dimensions used in manufacturing, but limiting dimensions, maximum or minimum, required to assure the desired interchangeability. (The metric equivalent dimensions are for reference only.) Dimensions are shown in Fig. 2, where

$B$ = inside diameter of bushing
$D$ = pin diameter
$F$ = overall chain height
$H$ = roller diameter
$J$ = pin head to centerline
$K$ = pin end to centerline
$P$ = assembled chain pitch (this is a theoretical reference dimension used for basic calculations)
$T$ = sidebar thickness
$U$ = sidebar height
$V$ = sidebar end clearance radius
$W$ = inside width of roller link
$X$ = outside width of roller link
$Z$ = width between outer sidebars

## 4 ATTACHMENT DIMENSIONS

See Tables 4, 5, 6, 7, and 8 for various attachment type dimensions.

## 5 SPROCKET TOOTH FORM

### 5.1 Nomenclature

Figure 3 and other parts of this Standard utilize the following nomenclature (see also Tables 9 and 10):

$C_b$ = undersize compensation (typically 0.06 in., 1.5 mm)
$C_c$ = chain clearance circle
$C_{cf}$ = chain clearance circle factor (see Table 10)
$C_p$ = pitch line clearance
$D_b$ = bottom diameter



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

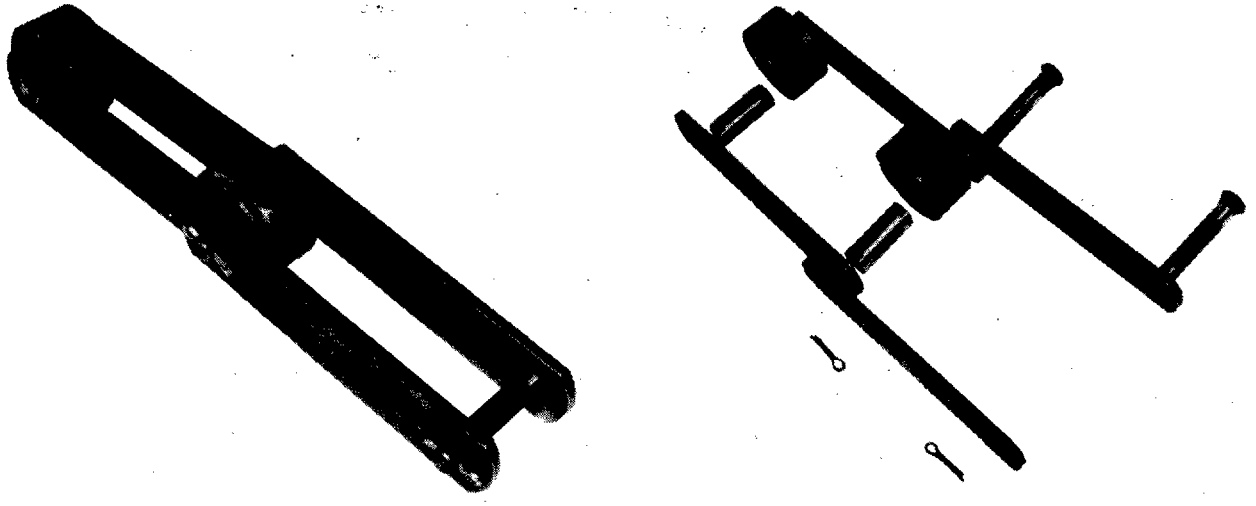


**FIG. 1 STEEL ROLLER TYPE CONVEYOR CHAINS**

$D_o$ = outside diameter
$D_p$ = pitch diameter
$D_{pf}$ = pitch diameter factor
$D_r$ = root diameter
$H$ = roller outside diameter, max. (see Table 2)
$N_t$ = number of teeth
$P$ = chain pitch
$R_p$ = pocket radius
$R_t$ = topping radius
$S_s$ = side slope
$U$ = sidebar height, max. (see Table 3)
$W_f$ = working face
$W_t$ = tooth width, max.
$\theta$ = pressure angle

## 5.2 Sprocket Tooth Form Data

The elements of a chain sprocket and the tooth form may be determined by the following:

| | |
|---|---|
| Pitch diameter: | $D_p = P \times D_{pf}$ |
| Root diameter max.: | $D_r = (P \times D_{pf}) - H$ max.[1] |
| Chain clearance circle: | $C_c = P(C_{cf} - 0.05) - U$ max.[2] |
| Outside diameter: | $D_o = (P \times C_{cf}) + U$ max.[3] |
| Pitch line clearance: | $C_p = P \times 0.10$ to $P \times 0.15$ |
| Pitch diameter factor: | $D_{pf} = csc(180/N_t)$ |
| Clearance circle/outside diameter factor: | $C_{cf} = cot(180/N_t)$ |
| Pressure angle: | $\theta$ |
| Working face: | $W_f = 0.01 \times P \times N_t$[4] |
| Pocket radius max.: | $R_p = H/2$[1] |
| Topping radius: | $R_t = 0.5 \times P$ |
| Tooth width: | $W_t = 0.95\ W$ min. of chain |
| Side slope: | $S_s$ = approx. $0.12 \times W_t$ (not to exceed 0.38 in., 9.6 mm) |
| Bottom diameter: | $D_b = D_r - C_b$ |

[1] The bottom diameter should be smaller than the root diameter and the pocket radius should be smaller than $H/2$. Oversize dimensions cause improper chain and sprocket action and excessive chain loads.

[2] No portion of hub, beads, lugs, or fillets shall extend beyond this circle in the sidebar zone.

[3] Outside diameter may be increased to give a full height tooth when the top of the chain is clear of flights, pans, buckets, etc. Tooth working face length provides for approximately 5% chain pitch elongation.

[4] Limitation on length of working face: the working face shall not extend beyond the line through the adjacent pitch point, which is perpendicular to the working face.



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

STD.ASME B29.15M-ENGL 1997 ■ 0759670 0587290 121 ■



## TABLE 1
## GENERAL CHAIN DIMENSIONS, M.U.T.S., STRAND LENGTH, AND MEASURING LOAD

| Chain No. | Chain Pitch, *P* | Pin Diameter, *D* | Roller Outside Diameter, *H* | Sidebar Height, *U* | Sidebar Thickness, *T* | Inside Width, *W* | Min. Ultimate Tensile Strength, lb | Max. Measuring Length of Nominal 120 in. Strand | Min. Measuring Length of Nominal 120 in. Strand | Measuring Load, lb |
|---|---|---|---|---|---|---|---|---|---|---|
| **Dimensions, in.** | | | | | | | | | | |
| 2915-10 | 3.000 | 0.438 | 1.50 | 1.13 | 0.19 | 1.00 | 11,000 | 120.38 | 120.00 | 200 |
| 2915-20 | 4.000 | 0.438 | 1.50 | 1.13 | 0.19 | 1.00 | 11,000 | 120.38 | 120.00 | 200 |
| 2915-30 | 4.000 | 0.438 | 2.00 | 1.25 | 0.19 | 1.13 | 14,000 | 120.38 | 120.00 | 200 |
| 2915-40 | 4.000 | 0.500 | 1.50 | 1.25 | 0.25 | 0.88 | 16,000 | 120.38 | 120.00 | 200 |
| 2915-50 | 4.000 | 0.625 | 2.25 | 1.50 | 0.38 | 1.31 | 24,000 | 120.38 | 120.00 | 500 |
| 2915-60 | 6.000 | 0.438 | 2.00 | 1.25 | 0.25 | 1.13 | 15,000 | 120.38 | 120.00 | 200 |
| 2915-70 | 6.000 | 0.563 | 2.50 | 1.50 | 0.25 | 1.25 | 20,000 | 120.38 | 120.00 | 400 |
| 2915-80 | 6.000 | 0.625 | 2.00 | 1.50 | 0.31 | 1.31 | 23,000 | 120.38 | 120.00 | 300 |
| 2915-90 | 6.000 | 0.750 | 3.00 | 2.00 | 0.38 | 1.38 | 33,000 | 120.38 | 120.00 | 500 |
| **Dimensions, mm** | | | | | | | | | | |
| 2915-10 | 76.20 | 11.13 | 38.1 | 28.7 | 4.8 | 25.4 | 48.95 | 3057.7 | 3048.0 | 0.9 |
| 2915-20 | 101.60 | 11.13 | 38.1 | 28.7 | 4.8 | 25.4 | 48.95 | 3057.7 | 3048.0 | 0.9 |
| 2915-30 | 101.60 | 11.13 | 50.8 | 31.8 | 4.8 | 28.7 | 62.30 | 3057.7 | 3048.0 | 0.9 |
| 2915-40 | 101.60 | 12.70 | 38.1 | 31.8 | 6.4 | 22.4 | 71.20 | 3057.7 | 3048.0 | 0.9 |
| 2915-50 | 101.60 | 15.88 | 57.2 | 38.1 | 9.7 | 33.3 | 106.80 | 3057.7 | 3048.0 | 2.2 |
| 2915-60 | 101.60 | 11.13 | 50.8 | 31.8 | 6.4 | 28.7 | 66.75 | 3057.7 | 3048.0 | 0.9 |
| 2915-70 | 152.40 | 14.30 | 63.5 | 38.1 | 6.4 | 31.8 | 89.00 | 3057.7 | 3048.0 | 1.8 |
| 2915-80 | 152.40 | 15.88 | 50.8 | 38.1 | 7.9 | 33.3 | 102.35 | 3057.7 | 3048.0 | 1.3 |
| 2915-90 | 152.40 | 19.05 | 76.2 | 50.8 | 9.7 | 35.1 | 146.85 | 3057.7 | 3048.0 | 2.7 |



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

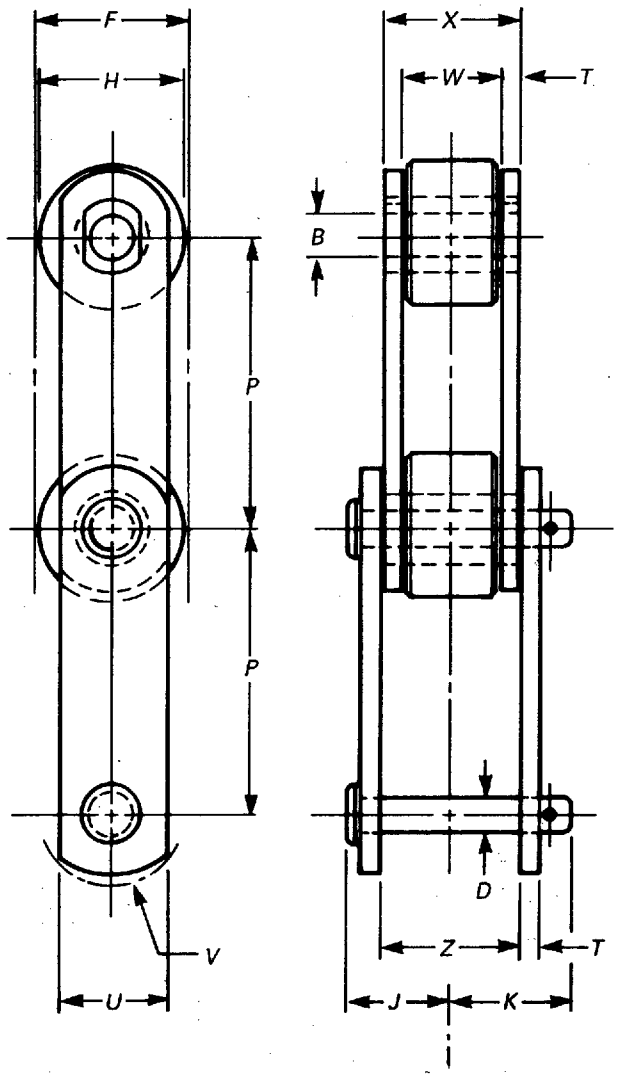



**FIG. 2 DIMENSIONS OF CHAIN LINKS**



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

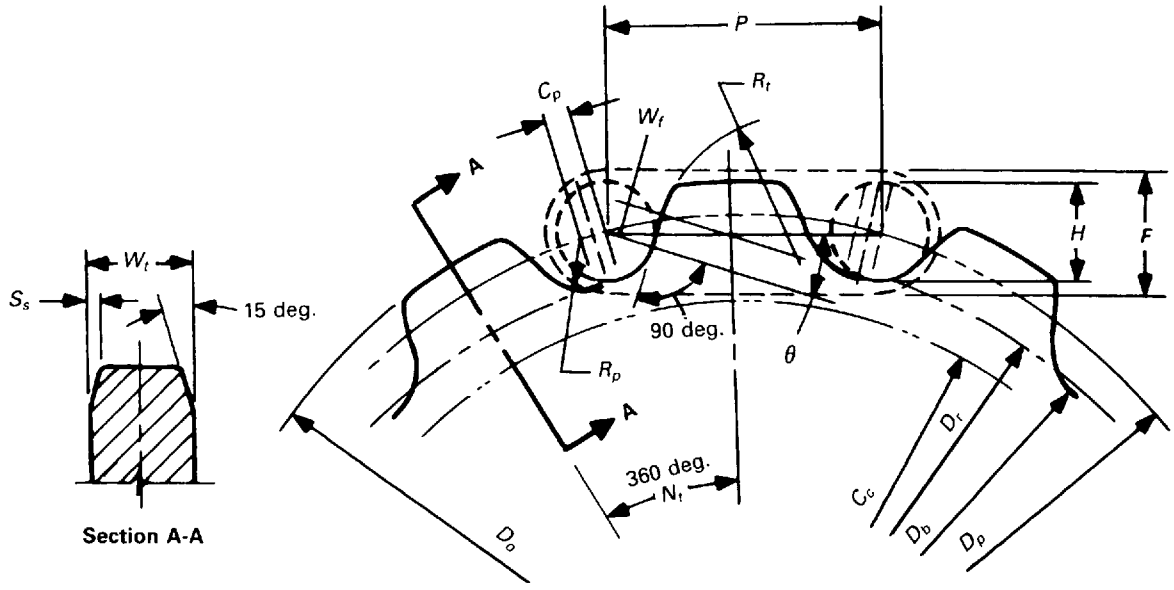



**FIG. 3 SPROCKET TOOTH FORM**

**TABLE 2**
**MAXIMUM AND MINIMUM CONTROLLING DIMENSIONS FOR INTERCHANGEABLE CHAIN LINKS**

| Chain No. | Chain Pitch, *P* | Pin Diameter, *D*, Max. | Bushing Inside Diameter, *B*, Min. | Roller Outside Diameter, *H*, Max. | Width Between OSSB, *Z*, Min. | Width of Roller Link, *X*, Max. | Width Between ISSB, *W*, Min. |
|---|---|---|---|---|---|---|---|
| | | | **Dimensions, in.** | | | | |
| 2915-10 | 3.000 | 0.441 | 0.446 | 1.51 | 1.40 | 1.39 | 0.96 |
| 2915-20 | 4.000 | 0.441 | 0.446 | 1.51 | 1.40 | 1.39 | 0.96 |
| 2915-30 | 4.000 | 0.441 | 0.446 | 2.01 | 1.52 | 1.51 | 1.09 |
| 2915-40 | 4.000 | 0.503 | 0.508 | 1.51 | 1.40 | 1.39 | 0.83 |
| 2915-50 | 4.000 | 0.628 | 0.633 | 2.26 | 2.09 | 2.08 | 1.26 |
| 2915-60 | 6.000 | 0.441 | 0.446 | 2.01 | 1.65 | 1.64 | 1.08 |
| 2915-70 | 6.000 | 0.566 | 0.571 | 2.51 | 1.77 | 1.76 | 1.20 |
| 2915-80 | 6.000 | 0.628 | 0.633 | 2.01 | 1.97 | 1.96 | 1.26 |
| 2915-90 | 6.000 | 0.753 | 0.758 | 3.01 | 2.15 | 2.14 | 1.33 |
| | | | **Dimensions, mm** | | | | |
| 2915-10 | 76.20 | 11.20 | 11.33 | 38.4 | 35.6 | 35.3 | 24.4 |
| 2915-20 | 101.60 | 11.20 | 11.33 | 38.4 | 35.6 | 35.3 | 24.4 |
| 2915-30 | 101.60 | 11.20 | 11.33 | 51.1 | 38.6 | 38.4 | 27.7 |
| 2915-40 | 101.60 | 12.78 | 12.90 | 38.4 | 35.6 | 35.3 | 21.1 |
| 2915-50 | 101.60 | 15.95 | 16.08 | 57.4 | 53.1 | 52.8 | 32.0 |
| 2915-60 | 152.40 | 11.20 | 11.33 | 51.1 | 41.9 | 41.7 | 27.4 |
| 2915-70 | 152.40 | 14.38 | 14.50 | 63.8 | 45.0 | 44.7 | 30.5 |
| 2915-80 | 152.40 | 15.95 | 16.08 | 51.1 | 50.0 | 49.8 | 32.0 |
| 2915-90 | 152.40 | 19.13 | 19.25 | 76.5 | 54.6 | 54.4 | 33.83 |



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale


## TABLE 3 CHAIN CLEARANCE DIMENSIONS

| Chain No. | Chain Height, *F*, Max. | Sidebar Height, *U*, Max. | Sidebar End Clearance Radius, *V*, Min. | Attachment Clearance Radius, *R*, Min. | Pin Head to Centerline, *J*, Max. | Pin End to Centerline, *K*, Max. |
|---|---|---|---|---|---|---|
| | | | **Dimensions, in.** | | | |
| 2915-10 | 1.52 | 1.18 | 0.69 | 0.71 | 1.06 | 1.26 |
| 2915-20 | 1.52 | 1.18 | 0.69 | 0.71 | 1.06 | 1.26 |
| 2915-30 | 2.02 | 1.31 | 0.78 | 0.80 | 1.16 | 1.35 |
| 2915-40 | 1.52 | 1.31 | 0.78 | 0.80 | 1.18 | 1.35 |
| 2915-50 | 2.27 | 1.56 | 0.90 | 0.92 | 1.67 | 1.91 |
| 2915-60 | 2.02 | 1.56 | 0.90 | 0.92 | 1.28 | 1.44 |
| 2915-70 | 2.52 | 1.56 | 0.90 | 0.92 | 1.36 | 1.66 |
| 2915-80 | 2.02 | 1.56 | 0.90 | 0.92 | 1.67 | 1.78 |
| 2915-90 | 3.02 | 2.06 | 1.20 | 1.22 | 1.79 | 2.06 |
| | | | **Dimensions, mm** | | | |
| 2915-10 | 38.6 | 30.0 | 17.5 | 18.0 | 26.9 | 32.0 |
| 2915-20 | 38.6 | 30.0 | 17.5 | 18.0 | 26.9 | 32.0 |
| 2915-30 | 51.3 | 33.3 | 19.8 | 20.3 | 29.5 | 34.3 |
| 2915-40 | 38.6 | 33.3 | 19.8 | 20.3 | 30.0 | 34.3 |
| 2915-50 | 51.7 | 39.6 | 22.9 | 23.4 | 42.4 | 48.5 |
| 2915-60 | 51.3 | 39.6 | 22.9 | 23.4 | 32.5 | 36.6 |
| 2915-70 | 64.0 | 39.6 | 22.9 | 23.4 | 34.5 | 42.2 |
| 2915-80 | 51.3 | 39.6 | 22.9 | 23.4 | 42.4 | 45.2 |
| 2915-90 | 76.7 | 52.3 | 30.5 | 31.0 | 45.5 | 52.3 |



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

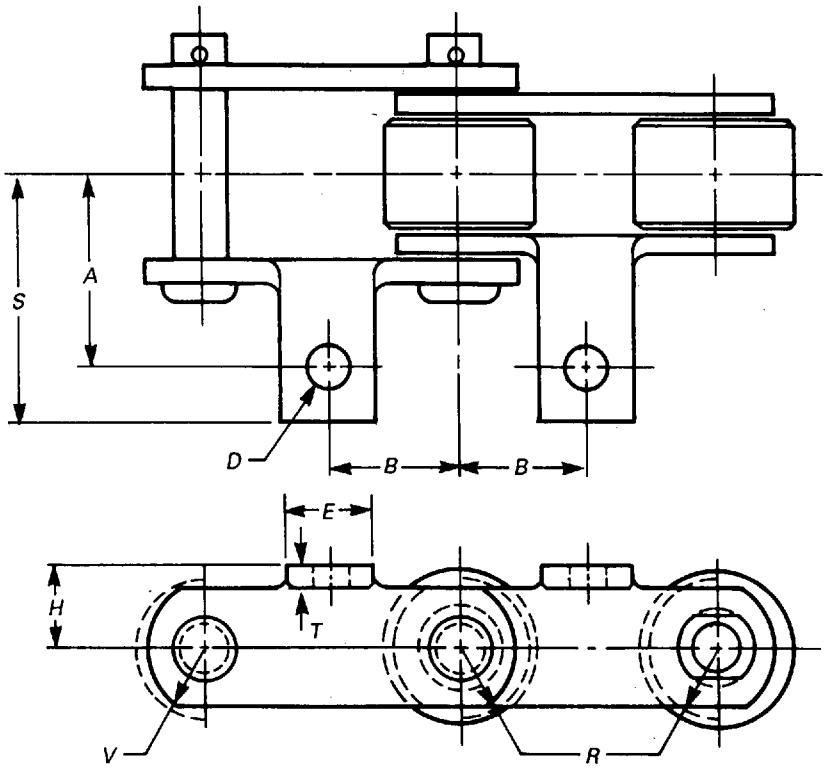



## TABLE 4 A-1 ATTACHMENTS

| Chain No. | A | B | E, Max. | H | S, Max. | T, Max. | R, Min. | D, Nominal Bolt | D, Min. Hole |
|---|---|---|---|---|---|---|---|---|---|
| **Dimensions, in. [Note (1)]** | | | | | | | | | |
| 2915-10 | 1.47 | 1.50 | 2.03 | 0.81 | 2.25 | 0.22 | 0.71 | 0.312 | 0.33 |
| 2915-20 | 1.38 | 2.00 | 2.53 | 0.81 | 2.25 | 0.22 | 0.71 | 0.375 | 0.40 |
| 2915-30 | 2.00 | 2.00 | 3.41 | 1.12 | 2.72 | 0.22 | 0.80 | 0.375 | 0.40 |
| 2915-40 | 1.38 | 2.00 | 2.75 | 0.88 | 2.00 | 0.28 | 0.80 | 0.375 | 0.40 |
| 2915-50 | 2.00 | 2.00 | 2.78 | 1.25 | 3.00 | 0.41 | 0.92 | 0.500 | 0.53 |
| 2915-60 | 2.00 | 3.00 | 3.50 | 1.25 | 2.81 | 0.28 | 0.92 | 0.375 | 0.40 |
| 2915-70 | 2.00 | 3.00 | 3.03 | 1.12 | 3.03 | 0.28 | 0.92 | 0.500 | 0.53 |
| 2915-80 | 2.00 | 3.00 | 3.03 | 1.12 | 2.66 | 0.34 | 0.92 | 0.500 | 0.53 |
| 2915-90 | 2.12 | 3.00 | 2.53 | 1.62 | 3.53 | 0.41 | 1.22 | 0.500 | 0.53 |
| **Dimensions, mm [Note (1)]** | | | | | | | | | |
| 2915-10 | 37.3 | 38.1 | 51.6 | 20.6 | 57.2 | 5.6 | 18.0 | 7.93 | 8.4 |
| 2915-20 | 35.1 | 50.8 | 64.3 | 20.6 | 57.2 | 5.6 | 18.0 | 9.53 | 10.2 |
| 2915-30 | 50.8 | 50.8 | 86.6 | 28.5 | 69.1 | 5.6 | 20.3 | 9.53 | 10.2 |
| 2915-40 | 35.1 | 50.8 | 69.9 | 22.4 | 50.8 | 7.1 | 20.3 | 9.53 | 10.2 |
| 2915-50 | 50.8 | 50.8 | 70.6 | 31.8 | 76.2 | 10.4 | 23.7 | 12.70 | 13.5 |
| 2915-60 | 50.8 | 76.2 | 88.9 | 31.8 | 71.4 | 7.1 | 23.7 | 9.53 | 10.2 |
| 2915-70 | 50.8 | 76.2 | 77.0 | 28.5 | 77.0 | 7.1 | 23.7 | 12.70 | 13.5 |
| 2915-80 | 50.8 | 76.2 | 77.0 | 28.5 | 67.6 | 8.6 | 23.7 | 12.70 | 13.5 |
| 2915-90 | 53.9 | 76.2 | 64.3 | 41.2 | 89.7 | 10.4 | 31.0 | 12.70 | 13.5 |

NOTE:
(1) For *V* dimension, see Table 3.



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS Not for Resale

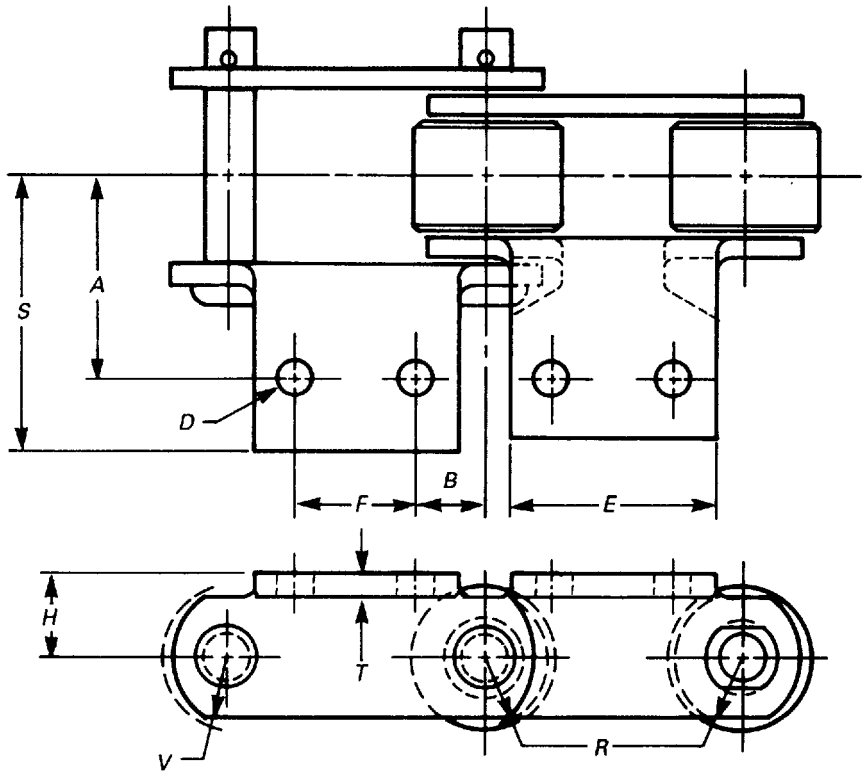


## TABLE 5 A-2 ATTACHMENTS


| Chain No. | A | B | E, Max. | F | H | S, Max. | T, Max. | R, Min. | D, Nominal Bolt | D, Min. Hole |
|---|---|---|---|---|---|---|---|---|---|---|
| **Dimensions, in. [Note (1)]** | | | | | | | | | | |
| 2915-10 | 1.47 | 0.97 | 2.03 | 1.06 | 0.81 | 2.25 | 0.22 | 0.71 | 0.250 | 0.27 |
| 2915-20 | 1.38 | 1.41 | 2.53 | 1.19 | 0.81 | 2.25 | 0.22 | 0.71 | 0.312 | 0.33 |
| 2915-30 | 2.00 | 1.00 | 3.41 | 2.00 | 1.12 | 2.72 | 0.22 | 0.80 | 0.375 | 0.40 |
| 2915-40 | 1.38 | 1.25 | 2.53 | 1.50 | 0.88 | 2.09 | 0.28 | 0.80 | 0.375 | 0.40 |
| 2915-50 | 2.00 | 1.25 | 2.88 | 1.50 | 1.25 | 2.89 | 0.41 | 0.92 | 0.375 | 0.40 |
| 2915-60 | 2.00 | 2.00 | 3.50 | 2.00 | 1.25 | 2.81 | 0.28 | 0.92 | 0.375 | 0.40 |
| 2915-70 | 2.00 | 2.00 | 3.50 | 2.00 | 1.12 | 3.03 | 0.28 | 0.92 | 0.375 | 0.40 |
| 2915-80 | 2.00 | 2.00 | 3.53 | 2.00 | 1.12 | 2.88 | 0.34 | 0.92 | 0.375 | 0.40 |
| 2915-90 | 2.12 | 1.69 | 5.53 | 2.62 | 1.62 | 2.9 | 0.41 | 1.22 | 0.500 | 0.53 |
| **Dimensions, mm [Note (1)]** | | | | | | | | | | |
| 2915-10 | 37.3 | 24.6 | 51.6 | 26.9 | 20.6 | 57.2 | 5.6 | 18.0 | 6.35 | 6.9 |
| 2915-20 | 35.1 | 35.8 | 64.3 | 30.2 | 20.6 | 57.2 | 5.6 | 18.0 | 7.93 | 8.4 |
| 2915-30 | 50.8 | 25.4 | 86.6 | 50.8 | 28.5 | 69.1 | 5.6 | 20.3 | 9.53 | 10.2 |
| 2915-40 | 35.1 | 31.8 | 64.3 | 38.1 | 22.4 | 53.1 | 7.1 | 20.3 | 9.53 | 10.2 |
| 2915-50 | 50.8 | 31.8 | 73.2 | 38.1 | 31.8 | 73.4 | 10.4 | 23.7 | 9.53 | 10.2 |
| 2915-60 | 50.8 | 50.8 | 88.9 | 50.8 | 31.8 | 71.4 | 7.1 | 23.7 | 9.53 | 10.2 |
| 2915-70 | 50.8 | 50.8 | 88.9 | 50.8 | 28.5 | 77.0 | 7.1 | 23.7 | 9.53 | 10.2 |
| 2915-80 | 50.8 | 50.8 | 89.7 | 50.8 | 28.5 | 73.2 | 8.6 | 23.7 | 9.53 | 10.2 |
| 2915-90 | 53.9 | 42.9 | 140.5 | 66.6 | 41.2 | 73.7 | 10.4 | 31.0 | 12.70 | 13.5 |

NOTE:
(1) For *V* dimension, see Table 3.



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

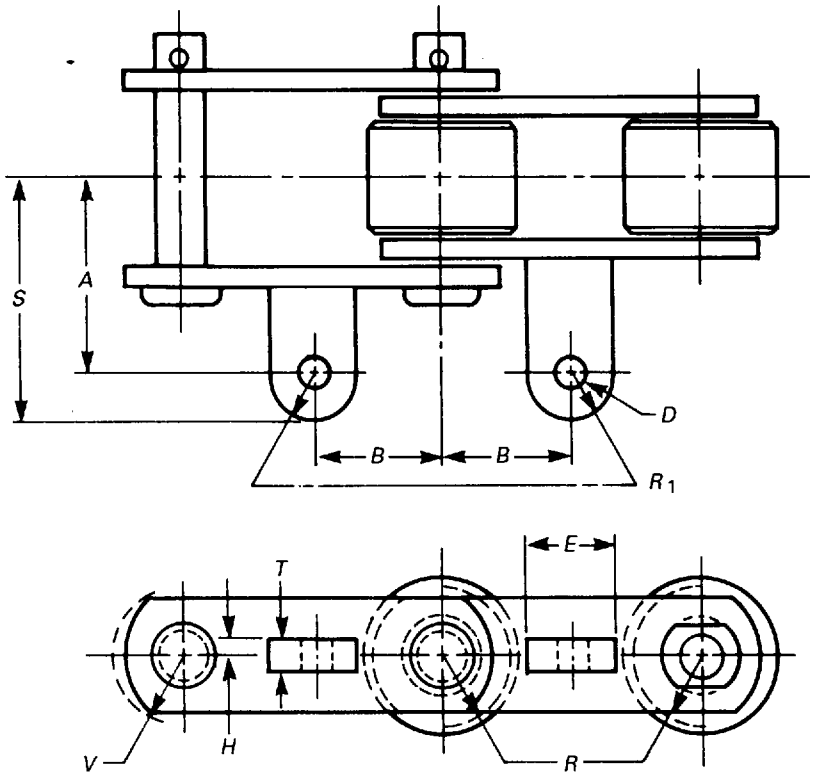


## TABLE 6 A-42 ATTACHMENTS


| Chain No. | *A* | *B* | *E*, Max. | *H* | *S*, Max. | *T*, Max. | *R*, Min. | $R_1$, Min. | *D*, Nominal Bolt | *D*, Min. Hole |
|---|---|---|---|---|---|---|---|---|---|---|
| **Dimensions, in. [Note (1)]** | | | | | | | | | | |
| 2915-10 | 1.56 | 1.50 | 1.28 | 0.12 | 2.25 | 0.28 | 0.71 | 0.69 | 0.375 | 0.40 |
| 2915-20 | 1.62 | 2.00 | 1.28 | 0.19 | 2.28 | 0.41 | 0.71 | 0.67 | 0.375 | 0.40 |
| **Dimensions, mm [Note (1)]** | | | | | | | | | | |
| 2915-10 | 39.6 | 38.1 | 32.5 | 3.1 | 57.2 | 7.1 | 18.0 | 17.5 | 9.53 | 10.2 |
| 2915-20 | 41.2 | 50.8 | 32.5 | 4.8 | 57.9 | 10.4 | 18.0 | 17.0 | 9.53 | 10.2 |

NOTE:
(1) For *V* dimension, see Table 3.



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

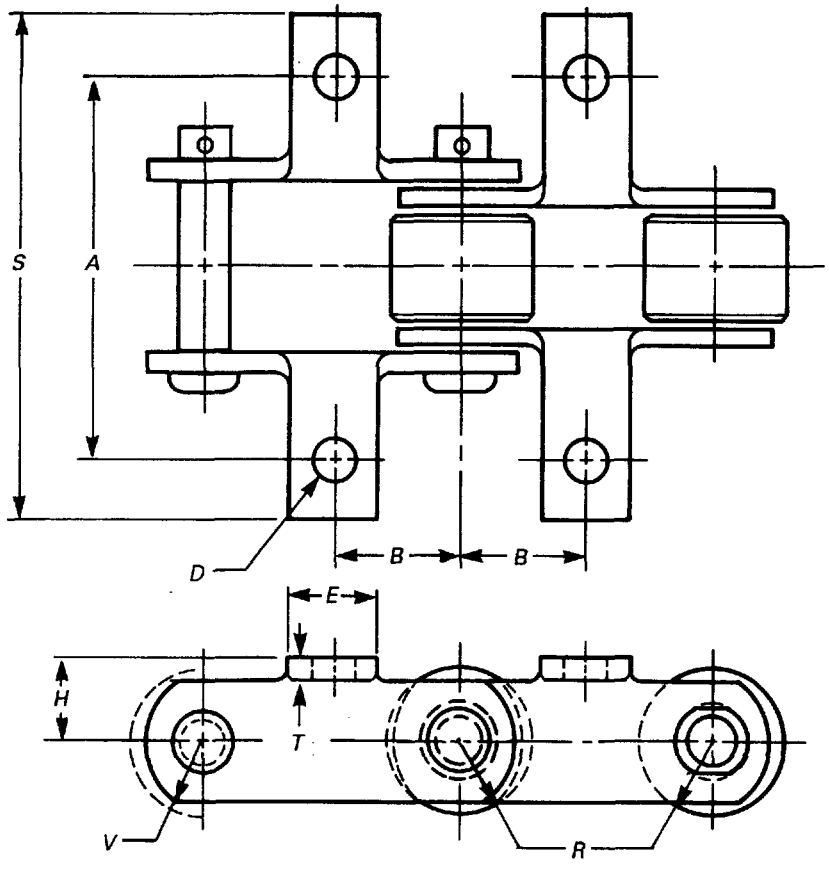



## TABLE 7 K-1 ATTACHMENTS

| Chain No. | A | B | E, Max. | H | S, Max. | T, Max. | R, Min. | D, Nominal Bolt | D, Min. Hole |
|---|---|---|---|---|---|---|---|---|---|
| **Dimensions, in. [Note (1)]** | | | | | | | | | |
| 2915-10 | 2.94 | 1.50 | 2.03 | 0.81 | 3.90 | 0.22 | 0.71 | 0.312 | 0.33 |
| 2915-20 | 2.76 | 2.00 | 2.53 | 0.81 | 4.50 | 0.22 | 0.71 | 0.375 | 0.40 |
| 2915-30 | 4.00 | 2.00 | 3.41 | 1.12 | 5.44 | 0.22 | 0.80 | 0.375 | 0.40 |
| 2915-40 | 2.76 | 2.00 | 2.75 | 0.88 | 4.00 | 0.28 | 0.80 | 0.375 | 0.40 |
| 2915-50 | 4.00 | 2.00 | 2.78 | 1.25 | 6.00 | 0.41 | 0.92 | 0.500 | 0.53 |
| 2915-60 | 4.00 | 3.00 | 3.50 | 1.25 | 5.62 | 0.28 | 0.92 | 0.375 | 0.40 |
| 2915-70 | 4.00 | 3.00 | 3.03 | 1.12 | 5.38 | 0.28 | 0.92 | 0.500 | 0.53 |
| 2915-80 | 4.00 | 3.00 | 3.50 | 1.12 | 5.32 | 0.34 | 0.92 | 0.500 | 0.53 |
| 2915-90 | 4.25 | 3.00 | 2.53 | 1.62 | 7.06 | 0.41 | 1.22 | 0.500 | 0.53 |
| **Dimensions, mm [Note (1)]** | | | | | | | | | |
| 2915-10 | 74.7 | 38.1 | 51.6 | 20.6 | 99.1 | 5.6 | 18.0 | 7.93 | 8.4 |
| 2915-20 | 70.1 | 50.8 | 64.3 | 20.6 | 114.3 | 5.6 | 18.0 | 9.53 | 10.2 |
| 2915-30 | 101.6 | 50.8 | 86.6 | 28.4 | 138.2 | 5.6 | 20.3 | 9.53 | 10.2 |
| 2915-40 | 70.1 | 50.8 | 69.9 | 22.4 | 101.6 | 7.1 | 20.3 | 9.53 | 10.2 |
| 2915-50 | 101.6 | 50.8 | 70.6 | 31.8 | 152.4 | 10.4 | 23.4 | 12.70 | 13.5 |
| 2915-60 | 101.6 | 76.2 | 88.9 | 31.8 | 142.8 | 7.1 | 23.4 | 9.53 | 10.2 |
| 2915-70 | 101.6 | 76.2 | 77.0 | 28.5 | 136.7 | 7.1 | 23.4 | 12.70 | 13.5 |
| 2915-80 | 101.6 | 76.2 | 88.9 | 28.5 | 135.1 | 8.6 | 23.4 | 12.70 | 13.5 |
| 2915-90 | 108.0 | 76.2 | 64.3 | 41.2 | 179.3 | 10.4 | 31.0 | 12.70 | 13.5 |

NOTE:
(1) For *V* dimension, see Table 3.



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

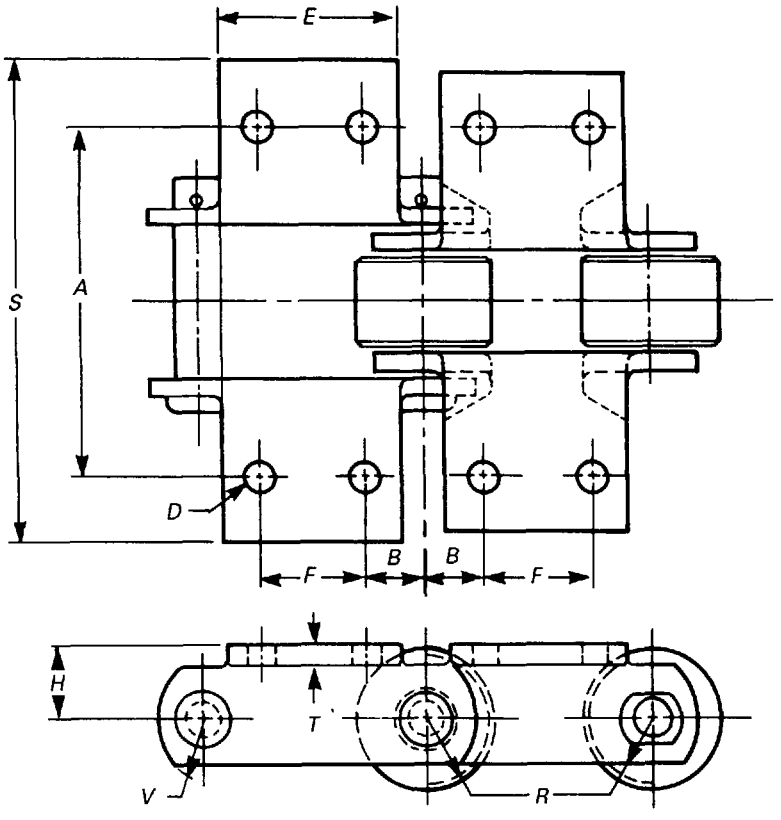


## TABLE 8 K-2 ATTACHMENTS

| Chain No. | A | B | E, Max. | F | H | S, Max. | T, Max. | R, Min. | D, Nominal Bolt | D, Min. Hole |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Dimensions, in. [Note (1)] | | | | | |
| 2915-10 | 2.94 | 0.97 | 2.03 | 1.06 | 0.81 | 4.50 | 0.22 | 0.71 | 0.312 | 0.33 |
| 2915-20 | 2.76 | 1.41 | 2.53 | 1.19 | 0.81 | 4.50 | 0.22 | 0.71 | 0.375 | 0.40 |
| 2915-30 | 4.00 | 1.00 | 3.41 | 2.00 | 1.12 | 5.44 | 0.22 | 0.80 | 0.375 | 0.40 |
| 2915-40 | 2.76 | 1.25 | 2.75 | 1.50 | 0.88 | 4.00 | 0.28 | 0.80 | 0.375 | 0.40 |
| 2915-50 | 4.00 | 1.25 | 2.78 | 1.50 | 1.25 | 6.00 | 0.41 | 0.92 | 0.500 | 0.53 |
| 2915-60 | 4.00 | 2.00 | 3.50 | 2.00 | 1.25 | 5.62 | 0.28 | 0.92 | 0.375 | 0.40 |
| 2915-70 | 4.00 | 2.00 | 3.03 | 2.00 | 1.12 | 5.38 | 0.28 | 0.92 | 0.500 | 0.53 |
| 2915-80 | 4.00 | 2.00 | 3.50 | 2.00 | 1.12 | 5.32 | 0.34 | 0.92 | 0.500 | 0.53 |
| 2915-90 | 4.25 | 1.69 | 2.53 | 2.63 | 1.62 | 7.06 | 0.41 | 1.22 | 0.500 | 0.53 |
| | | | | | Dimensions, mm [Note (1)] | | | | | |
| 2915-10 | 74.7 | 24.6 | 51.6 | 26.9 | 20.6 | 114.3 | 5.6 | 18.0 | 7.93 | 8.4 |
| 2915-20 | 70.1 | 35.8 | 64.3 | 30.2 | 20.6 | 114.3 | 5.6 | 18.0 | 9.53 | 10.2 |
| 2915-30 | 101.6 | 25.4 | 86.6 | 50.8 | 28.5 | 138.2 | 5.6 | 20.3 | 9.53 | 10.2 |
| 2915-40 | 70.1 | 31.8 | 69.9 | 38.1 | 22.4 | 101.6 | 7.1 | 20.3 | 9.53 | 10.2 |
| 2915-50 | 101.6 | 31.8 | 70.6 | 38.1 | 31.8 | 152.4 | 10.4 | 23.4 | 12.70 | 13.5 |
| 2915-60 | 101.6 | 50.8 | 88.9 | 50.8 | 31.88 | 142.8 | 7.1 | 23.4 | 9.53 | 10.2 |
| 2915-70 | 101.6 | 50.8 | 77.0 | 50.8 | 28.5 | 136.7 | 7.1 | 23.4 | 12.70 | 13.5 |
| 2915-80 | 101.6 | 50.8 | 88.9 | 50.8 | 28.5 | 135.1 | 8.7 | 23.4 | 12.70 | 13.5 |
| 2915-90 | 108.0 | 42.9 | 64.3 | 66.8 | 41.2 | 179.3 | 10.4 | 31.0 | 12.70 | 13.5 |

NOTE:
(1) For *V* dimension, see Table 3.



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

## TABLE 9 SPROCKETS — MAXIMUM ECCENTRICITY AND FACE RUNOUT TOLERANCES

| Pitch Diameter | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| in. | | | mm | | | Max. Face Runout TIR | | Max. Eccentricity TIR | |
| Over | | Including | Over | | Including | | | | |
| 0 | up to | 12 | 0 | up to | 305 | 0.06 | 1.52 | 0.09 | 2.29 |
| 12 | up to | 24 | 305 | up to | 610 | 0.12 | 3.05 | 0.15 | 3.81 |
| 24 | up to | 36 | 610 | up to | 915 | 0.20 | 5.08 | 0.21 | 5.33 |
| | Over 36 | | | Over 915 | | Consult mfr. | | Consult mfr. | |

## TABLE 10 SPROCKET FACTORS

| $N_t$ | $D_{pf}$ | θ, deg. | $C_{cf}$ | $N_t$ |
|---|---|---|---|---|
| 6 | 2.000 | 9 | 1.73 | 6 |
| 7 | 2.304 | 10 | 2.07 | 7 |
| 8 | 2.613 | 11 | 2.41 | 8 |
| 9 | 2.923 | 12 | 2.74 | 9 |
| 10 | 3.236 | 13 | 3.07 | 10 |
| 11 | 3.549 | 14 | 3.40 | 11 |
| 12 | 3.863 | 15 | 3.73 | 12 |
| 13 | 4.178 | 16 | 4.05 | 13 |
| 14 | 4.494 | 17 | 4.38 | 14 |
| 15 | 4.809 | 18 | 4.70 | 15 |
| 16 | 5.125 | 19 | 5.03 | 16 |
| 17 | 5.442 | 20 | 5.35 | 17 |
| 18 | 5.758 | 20 | 5.67 | 18 |
| 19 | 6.075 | 21 | 5.99 | 19 |
| 20 | 6.392 | 21 | 6.31 | 20 |
| 21 | 6.709 | 22 | 6.63 | 21 |
| 22 | 7.026 | 22 | 6.95 | 22 |
| 23 | 7.343 | 22 | 7.27 | 23 |
| 24 | 7.661 | 23 | 7.59 | 24 |
| 25 | 7.978 | 23 | 7.91 | 25 |
| 26 | 8.296 | 23 | 8.23 | 26 |
| 27 | 8.613 | 23 | 8.55 | 27 |
| 28 | 8.931 | 24 | 8.87 | 28 |
| 29 | 9.249 | 24 | 9.19 | 29 |
| 30 | 9.566 | 24 | 9.51 | 30 |
| 31 | 9.884 | 24 | 9.83 | 31 |
| 32 | 10.202 | 24 | 10.15 | 32 |
| 33 | 10.520 | 25 | 10.47 | 33 |
| 34 | 10.837 | 25 | 10.79 | 34 |
| 35 | 11.155 | 25 | 11.11 | 35 |
| 36 | 11.473 | 25 | 11.43 | 36 |



Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS

Not for Resale

## AMERICAN NATIONAL STANDARDS — CHAINS, ATTACHMENTS, AND SPROCKETS FOR POWER TRANSMISSION AND CONVEYING

Precision Power Transmission Roller Chains, Attachments, and Sprockets ..... B29.1M-1993
Inverted Tooth (Silent) Chains and Sprockets ..... B29.2M-1982(R1994)
Double-Pitch Power Transmission Roller Chains and Sprockets ..... B29.3M-1994
Double-Pitch Conveyor Roller Chains, Attachments, and Sprockets ..... B29.4M-1994
Steel Detachable Link Chains, Attachments, and Sprockets ..... B29.6M-1993
Leaf Chains, Clevises, and Sheaves ..... B29.8M-1993
Heavy Duty Offset Sidebar Power Transmission Roller Chains and Sprocket Teeth ..... B29.10M-1997
Combination Chains, Attachments, and Sprocket Teeth ..... B29.11M-1994
Steel Bushed Rollerless Chains, Attachments, and Sprocket Teeth ..... B29.12M-1983(R1988)
"H" Type Mill Chains, Attachments, and Sprocket Teeth ..... B29.14M-1996
Steel Roller Type Conveyor Chains, Attachments, and Sprocket Teeth ..... B29.15M-1997
Welded Steel Type Mill Chains, Attachments, and Sprocket Teeth ..... B29.16M-1995
Hinge Type Flat Top Conveyor Chains and Sprocket Teeth ..... B29.17M-1983(R1995)
Welded Steel-Type Drag Chains, Attachments, and Sprocket Teeth ..... B29.18M-1994
Agricultural Roller Chains, Attachments, and Sprockets ..... B29.19M-1996
700 Class Welded Steel and Cast Chains, Attachments, and Sprockets for Water and Sewage Treatment Plants ..... B29.21M-1996
Drop Forged Rivetless Chains, Sprocket Teeth Drive Chain/Drive Dogs ..... B29.22M-1995
Flexible Chain Couplings ..... B29.23M-1985(R1995)
Roller Load Chains for Overhead Hoists ..... B29.24M-1995
Open Barrel Steel Pintle-Type Conveyor Chains, Attachments, and Sprockets ..... B29.25M-1994
Fatigue Testing Power Transmission Roller Chain ..... B29.26M-1996

*The ASME Publications Catalog shows a complete list of all the Standards published by the Society. For a complimentary catalog, or the latest information about our publications, call 1-800-THE-ASME (1-800-843-2763).*

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale

# ASME Services

ASME is committed to developing and delivering technical information. At ASME's Information Central, we make every effort to answer your questions and expedite your orders. Our representatives are ready to assist you in the following areas:

ASME Press
*Codes & Standards*
Credit Card Orders
IMechE Publications
Meetings & Conferences
Member Dues Status
Member Services & Benefits
Other ASME Programs
Payment Inquiries
Professional Development
Short Courses
Publications
Public Information
Self-Study Courses
Shipping Information
Subscriptions/Journals/Magazines
Symposia Volumes
Technical Papers

**How can you reach us? It's easier than ever!**

There are four options for making inquiries* or placing orders. Simply mail, phone, fax, or E-mail us and an Information Central representative will handle your request.

*Mail*
**ASME**
22 Law Drive, Box 2900
Fairfield, New Jersey
07007-2900

*Call Toll Free*
**US & Canada:** 800-THE-ASME
(800-843-2763)
**Mexico:** 95-800-THE-ASME
(95-800-843-2763)
**Universal:** 201-882-1167

*Fax-24 hours*
201-882-1717
201-882-5155

*E-Mail-24 hours*
Infocentral
@asme.org

* Information Central staff are not permitted to answer inquiries about the technical content of this code or standard. Information as to whether or not technical inquiries are issued to this code or standard is shown on the copyright page. All technical inquiries must be submitted in writing to the staff secretary. Additional procedures for inquiries may be listed within.

Copyright ASME International
Provided by IHS under license with ASME
No reproduction or networking permitted without license from IHS
Not for Resale