nema

STANDARDS PUBLICATION NO. 260

Safety Labels for Padmounted Switchgear and Transformers Sited in Public Areas

NEMA

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION ■ 2101 L STREET, N.W., WASHINGTON, D.C. 20037

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

NEMA 260-1991

260

SAFETY LABELS FOR PADMOUNTED SWITCHGEAR AND TRANSFORMERS SITED IN PUBLIC AREAS

Published by

National Electrical Manufacturers Association
2101 L Street N.W., Suite 300
Washington, D.C. 20037
(202) 457-8400

© 1991 National Electrical Manufacturers Association

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

TABLE OF CONTENTS

		Page
	FOREWORD	i
	SCOPE	i
	PURPOSE	i
Section 1	MATERIAL	1
Section 2	MAINTENANCE	1
Section 3	FORMAT	1
Section 4	LOCATION	2
Illustrations	FIGURES	
	Figure 1	3
	Figure 2	4
	Figure 3	5
	Figure 4	6

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Foreword

In early January 1981, several member companies of the NEMA transformer Section indicated a strong desire to reduce, through whatever practical means possible, the number of accidents involving very small children coming into contact with the active elements of padmounted transformers located in public areas. These accidents, while statistically low in number per year, are usually disfiguring and can result in death.

In February 1981, the Power Equipment Division Executive Committee established the Task Force on Safety Labels for Pad-mounted Switchgear and Transformers Sited in Public Areas. The Executive Committee charged the Task Force to develop a safety label which would warn small children away from an open pad-mount and simultaneously elicit the attention of an adult to contact the owner of the pad-mount for the purpose of removing the hazard. Secondly, the Task Force was instructed to develop a standard to accompany the label which would define its scope, content, appearance, and construction.

Over a period of 14 months, the Task Force pursued liaison with manufacturers and user groups in order to obtain acceptance of the safety label concept while label development was underway. The resulting pictorial, "Mr. Ouch", was developed from several designs and was psychologically tested in two phases. In the fall of 1981, 16 possible pictorials were tested in Chicago, Illinois and San Antonio, Texas among an equal number of English and non-English speaking children 2-1/2 to 6 years old. Phase I testing indicated no significance in geographical considerations in regards to the perceptual attitudes of the children. The best four pictorials of Phase I testing were redesigned and tested again in January 1982 amoung English and non-English speaking children aged 2-1/2 to 6-1/2 in Chicago, Illinois. In Phase II testing, the "Mr. Ouch" pictorial scored very high in the two major desirable label attributes--the depiction of an immediate hazard and the elicitation of a safe response from the child to avoid the hazard.

The psychological testing was conducted by the George R. Frerich Associates Testing Organization of Chicago, Illinois. Graphic design was provided by Agnew Moyer Smith Inc., Pittsburgh, Pennsylvania.

NEMA has exclusive rights for the management of the "Mr. Ouch" pictorial. Rights may be obtained for the use of the pictorial from the National Electrical Manufacturers Association, Suite 300, 2101 L Street, NW., Washington, DC 20037.

Program Manager
National Electrical Manufacturers Association

Scope

These labels are for use on pad-mounted switchgear and transformers sited in public areas such as utility easements adjacent to residential properties, shopping centers, schools, etc. They may also be used for such equipment sited in utility or industrial properties which are not normally accessible to the general public.

Purpose

These labels are intended to identify the pad-mounted equipment as potentially hazardous to anyone who comes in contact with their contents. The pictorials are designed to be meaningful to children and the illiterate, but with supportive wording expected to elicit a safe response from an adult.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

SAFETY LABELS FOR PAD-MOUNTED SWITCHGEAR AND TRANSFORMERS SITED IN PUBLIC AREAS

Section 1
MATERIAL

1.1 The labels shall be durable and made of weather resistant material.

NEMA Standard 9-15-1982.

1.2 Adhesixe mounted labels shall be such that removal is impossible except by defacing, covering or destroying them. These labels shall meet the requirements of UL969-1982, Marking and Labeling Systems[1].

NEMA Standard 9-15-1982.

1.3 Labels mounted by means of mechanical fasteners shall be used only if the removal of the mechanical fasteners leaves the cabinet with no openings through which foreign objects such as sticks, rods or wires might be inserted to contact live components. These labels shall meet the following requirements of UL969-1982[2].

Requirement	Reference (of UL969)
Legibility test	Table 3.1
Defacement test	Table 3.1
Humidity test	Paragraph 7.3
Temperature test	Paragraph 7.4
Ultraviolet light test	Paragraph 7.5

NEMA Standard 9-15-1982.

Section 2
MAINTENANCE

2.1 It is desirable that the safety label remain legible for the service life of the pad-mounted equipment to which it is attached. Renewal of the safety label may be required during normal maintenance.

Authorized Engineering Information 9-15-1982.

Section 3
FORMAT

3.1 The color of the warning signal word field shall be orange and the color of the danger signal word field shall be red. All label colors as depicted in Figures 1 through 4 shall conform to the following Munsell Notations:

Black	N - 2.0 or lower
Orange	5.0 YR 6.0/15
Red	7.5 R 4.0/14
White	N - 9.0 or higher

NEMA Standard 9-15-1982.

3.2 The safety labels in Figures 1 and 2 shall be standard and shall be 4.5 inches, 0.25 inches (11.43 cm, 0.64 cm) wide and 8.0 inches, 0.5 inches (20.32 cm, 1.25 cm) long[3]. The warning label (Figure 1) shall be affixed to the outside of the pad-mounted equipment. The danger label (Figure 2) shall be affixed to the inside of the pad-mounted equipment.

NEMA Standard 9-15-1982.

3.3 As an option, bilingual labels such as Figures 3 and 4 shall be furnished when specified. These labels shall be 10.6 inches, -0.0 inches + 1.0 inches (26.92 cm, -0.0 cm +

[1]This standard is available from Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, Illinois, 60062

[2]UL969-1982 is written for adhesively mounted labels, however, some requirements are appropriate for labels mounted with mechanical fasteners. These latter requirements have been extracted for incorporation in this standard.

Authorized Engineering Information 9-15-1982.

[3]A 1/2 inch white border is intended to surround the label (signal word panel and black border) on all four sides.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

2.54 cm) wide with the height being variable to accommodate the bilingual message.

Authorized Engineering Information 9-15-1982.

3.4 It may be desirable that the owners of the pad-mounted equipment be identified with more information than "immediately call the electric power and light company". To this end, the owners of the pad-mounted equipment may place their name, company name and/or telephone number on or immediately adjacent to the area which reads "electric power and light company". The preceding standard messages shall not be covered by the substitution and the material used to convey the ownership of the pad-mounted equipment shall meet the material requirements of this standard, if not printed on the NEMA label.

Authorized Engineering Information 9-15-1982.

Section 4
LOCATION

4.1 The outside warning label(s) (Figures 1 or 3) shall be mounted as close as is practical to the equipment door while providing maximum visibility.

NEMA Standard 9-15-1982.

4.2 The inside danger label (Figures 2 or 4) shall be mounted as to be readily visible whenever the equipment door is open.

NEMA Standard 9-15-1982.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

⚠WARNING



Hazardous voltage inside.
Can shock, burn, or cause death.

Keep out.
If open or unlocked, immediately call electric power and light company.

Figure 1
WARNING LABEL

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

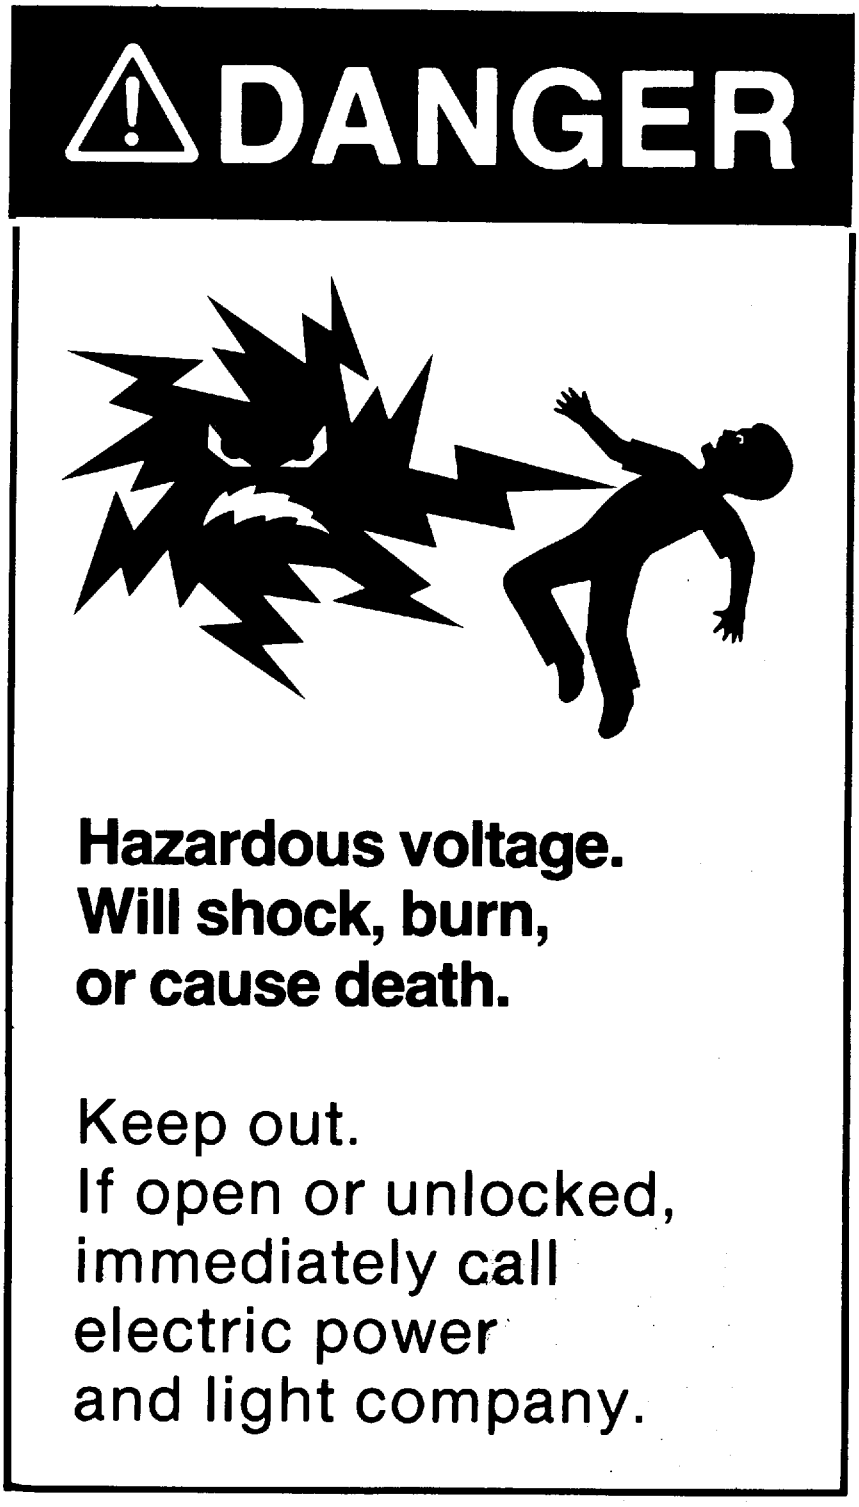

Figure 2
DANGER LABEL

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

⚠WARNING ADVERTENCIA



Hazardous voltage inside.
Can shock, burn, or cause death.

Keep out.
If open or unlocked, immediately call electric power and light company.

Contiene voltaje peligroso.
Puede producir choques eléctricos, quemaduras, o causar la muerte.

Manténgase alejado.
Si se encuentra abierto o sin llave llame a la compañía de electrica

Figure 3
BILINGUAL WARNING LABEL

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS

Not for Resale

NEMA 260 91 ■ 6470247 0500875 083 ■

⚠DANGER PELIGRO



**Hazardous voltage.
Will shock, burn,
or cause death.**

Keep out.
If open or unlocked,
immediately call
electric power
and light company.

**Voltaje peligroso.
Producirá choques
eléctricos, quemaduras,
o causará la muerte.**

Manténgase alejado.
Si se encuentra abierto
o sin llave llame a la
compañía de electrica

**Figure 4
BILINGUAL DANGER
LABEL**

NEMA STANDARDIZATION

The purpose of NEMA Standards, their classification and status are set forth in certain clauses of the NEMA *Standardization Policies and Procedures* manual and are referenced below:

Purpose of Standards

National Electrical Manufacturers Association Standards are adopted in the public interest and are designed to eliminate misunderstandings between the manufacturer and the purchaser and to assist the purchaser in selecting and obtaining the proper product for their particular needs. Existence of a National Electrical Manufacturers Association Standard does not in any respect preclude any member or nonmember from manufacturing or selling products not conforming to the standard.

(Standardization Policies and Procedures, p. 1)

Definition of a Standard

A standard of the National Electrical Manufacturers Association defines a product, process or procedure with reference to one or more of the following: nomenclature, composition, construction, dimensions, tolerances, safety, operating characteristics, performance, rating, testing, and the service for which they are designed.

(Standardization Policies and Procedures, p. 2)

Dimensions

Where dimensions are given for interchangeability purposes, alternate dimensions satisfying the other provisions of the Standards Publication may be capable of otherwise equivalent performance.

(Standardization Policies and Procedures, p. 8)

Categories of Standards

National Electrical Manufacturers Association Standards are of three classes:

1. NEMA Standard, which relates to a product, process or procedure commercially standardized and subject to repetitive manufacture, which standard has been approved by at least 90 percent of the members of the Subdivision eligible to vote thereon;
2. Suggested Standard for Future Design, which may not have been regularly applied to a commercial product, but which suggests a sound engineering approach to future development, which standard has been approved by at least two-thirds of the members of the Subdivision eligible to vote thereon.
3. Adoptive Standard, which is adopted in whole or in part from the standards of another organization, either domestic, regional, or international.

(Standardization Policies and Procedures, pp 7 & 16)

Authorized Engineering Information

Authorized Engineering Information consists of explanatory data and other engineering information of an informative character not falling within the classification of NEMA Standard or Suggested Standard for Future Design, which standard has been approved by at least two-thirds of the members of the Subdivision eligible to vote on the standard.

(Standardization Policies and Procedures, pp. 7 & 16)

Official Standards Proposal

An Official Standards Proposal is an official draft of a proposed standard which is formally recommended to an outside organization(s) for consideration, comment and/or approval, and which has been approved by at least 90 percent of the members of the Subdivision eligible to vote thereon. *(Standardization Policies and Procedures, pp 7 & 16)*

Identification of Status

Standards in NEMA Standards Publications are identified in the foreword or following each standard as "NEMA Standard" or "Suggested Standard for Future Design." These indicate the status of the standard. These words are followed by a date which indicates when the standard was adopted in its present form by the Association.

The material identified as "Authorized Engineering Information" and "Official Standards Proposal" is designated similarly.

July 17, 1990

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

DRY-TYPE & SPECIALTY TRANSFORMERS SECTION OF THE NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION

MEMBER COMPANIES

ABB Power T & D Company
Transformer & Air Switch Division
Bland, VA 24315

Acme Electric Corporation
Lumberton, NC 28358

Challenger Electrical Equipment Corp.
Jackson, MS 39209

GE
Hickory, NC 28601-2188

GE Motors
Ft. Wayne, IN 46801-2204

Hevi-Duty Electric
Unit of General Signal
Goldsboro, NC 27530

International Transformer Corp.
Montebello, CA 90640

Magnetran Inc.
Voorhees, NJ 08043

Matra Electric Corporation
Compton, CA 90224

MGM Transformer Company
Commerce, CA 90040

NECO Hammond, Inc.
Baraboo, WI 53913

Niagara Transformer Corporation
Buffalo, NY 14225

Olsun Electrics Corporation
Richmond, IL 60071-0001

Riviera Transformer Company
Division of Riviera Electric Corp.
Elk Grove Village, IL 60007

Southern Transformer Company
East Point, GA 30344

Square D Company
Palatine, IL 60067

R. E. Uptegraff Mfg. Company
Scottdale, PA 15683

Virginia Transformer Corporation
Roanoke, VA 24012

Westinghouse Electric Corporation
Pittsburgh, PA 15220

SWITCHGEAR SECTION

ABB Power Distribution, Inc.
Sanford, FL 32771

ABB Power T & D Company, Inc.
Blue Bell, PA 19422

ASC Industries, Inc.
North Canton, OH 44720-0523

Challenger Electrical Equipment Corp.
Raleigh, NC 27609

A.B. Chance Company
Centralia, MO 65240

Controlled Power Ltd. Partnership
Canton, OH 44710

Cooper Power Systems
South Milwaukee, WI 53172

Cooper Distribution Equipment Div.
Charlottesville, VA 22906

Electrical Equipment, Inc.
Birmingham, AL 35215

Electrical Power Systems, Inc.
Tulsa, OK 74131

GE
Power Systems Management Bus Dept.
Philadelphia, PA 19142

Hevi-Duty Electric
Unit of General Signal
Goldsboro, NC 27530

Gould Shawmut
Newburyport, MA 01950

G & W Electric Company
Blue Island, IL 60406

Kearney
Division of Kearney-National, Inc.
Atlanta, GA 30359

Malton Equipment Company
Virgina, MN 55792

Merlin Gerin, Inc.
Smyrna, GA 30082

MGM Transformer Company
Commerce, CA 90040

Mitsubishi Electric
Power Products, Inc.
Warrendale, PA 15086

Norberg Industries, Inc.
Tulsa, OK 74145

Pedersen Power Products
Division of E.A. Pedersen Company
Omaha, NE 68107

Power Controls, Inc.
Commerce, CA 90040

Power In Control, Inc.
Placentia, CA 92670

Powercon Corporation
Severn, MD 21144

The Pringle Electrical Mfg. Company
Fort Washington, PA 19034

Republic Electric & Development
Peoria, IL 61615

Siemens Energy & Automation, Inc.
Switchgear Division
Raleigh, NC 27626

Square D Company
Palatine, Il 60067

Toshiba International Corporation
Industrial Division
Houston, TX 77041

Trayer Engineering Corporation
San Francisco, CA 94107

USCO Power Equipment Corporation
Birmingham, AL 35202

Westinghouse Electric Corporation
Pittsburgh, PA 15220

TRANSFORMERS SECTION

ABB Power T & D Company, Inc.
Power Transformer Division
Muncie, IN 47307-0448

Challenger Electrical Equipment Corp.
Raleigh, NC 27609

Ferranti-Packard Transformers Ltd.
St. Catharines, Ontario
Canada L2R 6W9

GE
HIckory, NC 28601-2188

Hevi-Duty Electric
Unit of General Signal
Goldsboro, NC 27530

Kentucky Assn. Elec. Cooperatives, Inc.
Louisville, KY 40232

MGM Transformer Company
Commerce, CA 90040

NECO Hammond, Inc.
Baraboo, WI 53913

Niagara Transformer Corporation
Buffalo, NY 14225

North American Transformer
Milpitas, CA 95035

Pauwels Transformers
Washington, MO 63090

Siemens Energy & Automation, Inc.
Power Transformer Operation
Milwaukee, WI 53201

Square D Company
Palatine, IL 60067

R.E. Uptegraff Mfg. Company
Scottdale, PA 15683

Vantran Electric Corporation
Waco, TX 76702-0128

Virginia Transformer Corporation
Roanoke, VA 24012

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale