INTERNATIONAL STANDARD ISO/IEC 10164-6:1993
TECHNICAL CORRIGENDUM 1

Published 2003-03-01

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

Information technology — Open Systems Interconnection — Systems Management: Log control function

TECHNICAL CORRIGENDUM 1

Technologies de l'information — Interconnexion de systèmes ouverts (OSI) — Gestion-système: Fonction de contrôle de journal

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to ISO/IEC 10164-6:1993 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

ICS 35.100.70 **Ref. No. ISO/IEC 10164-6:1993/Cor.1:2003(E)**

© ISO/IEC 2003 – All rights reserved

Published in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Not for Resale

--`,,`-`-`,,`,,`,`,,`---

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

INTERNATIONAL STANDARD

ITU-T RECOMMENDATION

INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION – SYSTEMS MANAGEMENT: LOG CONTROL FUNCTION

TECHNICAL CORRIGENDUM 1

1) Subclause 8.1.1.1.5 "Log Full Action"

Add the following to the end of the subclause:

When a log is full its availability status will change to indicate the log full condition. If the log's full action is set to "halt", then no new log records will be added and the event will be lost. When log records are deleted, the log will leave the log full condition and new log records can be added to the log. If the log's full action is set to "wrap", then new records will be added overwriting the oldest records contained in the log. When log records are deleted, the log will leave the log full condition and new log records will no longer overwrite existing log records in the log.

2) Subclause 8.1.1.1.6 "Availability status"

Replace the second sentence:

The attribute may indicate a "log-full" condition; indicating that records can be retrieved but that no new records can be added.

with the following:

The attribute may indicate a "log-full" condition. Records can be retrieved while the log is in the "log-full" condition. If records are deleted from the log, the "log-full" value is removed from the availability status in either halt or wrap mode.

NOTE – In the case where halt behaviour is specified for the log, the "log-full" value implies no more records can be added. If wrap behaviour is specified, the value continues to remain as "log-full" even though forthcoming records will be added by overwriting existing records. The wrap mode combined with "log-full" condition indicates that old records are lost as overwriting takes place.

3) Subclause 8.1.1.5 "Normal operation of logs"

Add the following Note at the end of the subclause:

NOTE – A wrapping log can be viewed as a circular buffer. The margin between the highest capacity alarm threshold and 100% can be regarded as a safety factor, to allow sufficient time for log users to retrieve log records upon receipt of a capacity alarm, before those records which entered the log after the previous capacity alarm are overwritten. Resetting the hidden gauge to zero each time the highest threshold is crossed ensures the behaviour that a capacity alarm will be generated every time the same fraction of the log capacity is written to the log, and therefore the same safety factor is maintained. In other words, every time a fixed percentage of the log capacity is written to the wrapping log, a capacity alarm is emitted.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

INTERNATIONAL STANDARD ISO/IEC 10164-6:1993/Amd.1:1996
TECHNICAL CORRIGENDUM 1

Published 1996-12-15

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

Information technology — Open Systems Interconnection — Systems Management: Log control function

AMENDMENT 1: Implementation conformance statement proformas

TECHNICAL CORRIGENDUM 1

Technologies de l'information — Interconnexion de systèmes ouverts (OSI) — Gestion-systèmes: Fonction de contrôle de journal

AMENDEMENT 1: Proformes ICS

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to International Standard ISO/IEC 10164-6:1993/Amd.1:1996 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology,* Subcommittee SC 21, *Open systems interconnection, data management and open distributed processing.*

This material is reproduced from ISO documents under International Organization for Standardization (ISO) Copyright License number IHS/ICC/1996. Not for resale. No part of these ISO documents may be reproduced in any form, electronic retrieval system or otherwise, except as allowed in the copyright law of the country of use, or with the prior written consent of ISO (Case postale 56, 1211 Geneva 20, Switzerland, Fax +41 22 734 10 79), IHS or the ISO Licensor's members.

ICS 35.100.70 **Ref. No. ISO/IEC 10164-6:1993/Amd.1:1996/Cor.1:1996(E)**

Descriptors: data processing, information interchange, network interconnection, open systems interconnection, application layer, systems management, management.

© **ISO/IEC 1996**

Printed in Switzerland
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

INTERNATIONAL STANDARD

ITU-T RECOMMENDATION

INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION – SYSTEMS MANAGEMENT: LOG CONTROL FUNCTION

AMENDMENT 1
Implementation conformance statement proformas

TECHNICAL CORRIGENDUM 1

1) Annex A

In Table A.6 – "PICS Support Summary", *first row referencing,* "CCITT Rec. X.730 | ISO/IEC 10164-1, Annex E, SM Application Context", *change the status from* "m" *to* "o" *and add the following note for the corresponding row of this table:*

"NOTE – The supplier of implementation shall indicate the application contexts supported."

2) Subclause A.1.3

Add the following sentence after the line "– Not applicable or out of scope", *and immediately before* "NOTES":

"The value of 'm' in the Status column for the receiving of parameters, of tables of type MCS indicates that there is a minimum requirement for the implementation to be able to receive the parameter. The Additional information column shall be used to state whether the implementation provides support for more than the minimum requirement."

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

ISO 10164-6 93 ■ 4851903 0660161 539 ■

INTERNATIONAL STANDARD

ISO/IEC 10164-6

First edition
1993-06-15

AMENDMENT 1
1996-05-15

Information technology — Open Systems Interconnection — Systems Management: Log control function

AMENDMENT 1: Implementation conformance statement proformas

Technologies de l'information — Interconnexion de systèmes ouverts (OSI) — Gestion-systèmes: Fonction de contrôle de journal

AMENDEMENT 1: Proformes ICS

Reference number
ISO/IEC 10164-6:1993/Amd.1:1996(E)

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Not for Resale

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Amendment 1 to International Standard ISO/IEC 10164-6 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 21, *Open systems interconnection, data management and open distributed processing*, in collaboration with ITU-T. The identical text is published as ITU-T Rec. X.735/Amd.1.

© ISO/IEC 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

ISO 10164-6 93 ■ 4851903 0660163 301 ■

Introduction

This amendment includes tables, which document the mandatory and optional management information specific to the Log Control Management Function. This amendment will be used by Profile specifiers, for example those developing International Standardizes Profiles (ISPs), to specify an explicit subset of capability, which will afford interoperability between implementatations. The tables also include a column for equipment vendors to state the capability of their products in terms of the Profiles or base specification. The table structures comply with the Guidelines for Implementation Conformance Statement Proformas specified in ITU-T Recommendation X.724 | ISO/IEC 10165-6.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

INTERNATIONAL STANDARD

ITU-T RECOMMENDATION

INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION – SYSTEMS MANAGEMENT: LOG CONTROL FUNCTION

AMENDMENT 1
(to ITU-T Rec. X.735 | ISO/IEC 10164-6)

Implementation conformance statement proformas

1) *Add the following footnote to the first list item in 2.1:*

"[1] As amended by ITU-T Rec. X.701/Cor.2 | ISO/IEC 10040/Cor.2"

2) *Add the following reference to 2.1:*

"– ITU-T Recommendation X.724 (1993) | ISO/IEC 10165-6:1994, *Information technology – Open Systems Interconnection – Structure of management information: Requirements and guidelines for implementation conformance statement proformas associated with OSI management.*"

3) *Add the following references to 2.2:*

"– CCITT Recommendation X.291 (1992), *OSI conformance testing methodology and framework for protocol Recommendations for CCITT applications – Abstract test suite specification.*

ISO/IEC 9646-2:1991, *Information technology – Open Systems Interconnection – Conformance testing methodology and framework – Part 2: Abstract test suite specification.*

– ITU-T Recommendation X.296[2], *OSI conformance testing methodology and framework for protocol Recommendations for ITU-T applications – Implementation conformance statements.*

ISO/IEC 9646-7:1995, *Information technology – Open Systems Interconnection – Conformance testing methodology and framework – Part 7: Implementation Conformance Statements.*

And then add the following footnote:

[2] Presently at the stage of draft.

4) *Apply the following changes to 3.4:*

Replace "dependent conformance" *with* "managed object conformance statement (MOCS)".

Replace "general conformance" *with* "management information conformance statement (MICS)".

Relabel items f) through i) as h) through k) and insert the following new items:

"f) MICS proforma;

g) MOCS proforma;"

5) *Apply the following change to 3.7:*

Replace "system conformance statement" *with the following:*

"a) PICS proforma;

b) protocol implementation conformance statement;

c) system conformance statement."

6) *Renumber 3.8 as 3.9 and insert the following new subclause:*

"3.8 Implementation conformance statement proforma definitions

This Recommendation | International Standard makes use of the following terms defined in ITU-T Rec. X.724 | ISO/IEC 10165-6:

a) Managed Relationship Conformance Statement (MRCS);

b) Management Conformance Summary (MCS);

c) MCS proforma;

d) MRCS proforma."

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

7) *Add the following abbreviations to clause 4:*

"ICS Implementation Conformance Statement

MCS Management Conformance Summary

MICS Management Information Conformance Statement

MOCS Managed Object Conformance Statement

MRCS Managed Relationship Conformance Statement

PICS Protocol Implementation Conformance Statement"

8) *Replace clause 13 with the following:*

"13 Conformance

Implementations claiming to conform to this Recommendation | International Standard shall comply with the conformance requirements as defined in the following subclauses.

13.1 Static conformance

The implementation shall conform to the requirements of this Recommendation | International Standard in the manager role, the agent role, or both roles. A claim of conformance to at least one role shall be made in Table A.1.

If a claim of conformance is made for support in the manager role, the implementation shall support at least one management operation or notification of the log managed object or at least one management operation of a subclass of the log record managed object specified by this Recommendation | International Standard. The conformance requirements in the manager role for those management operations and notifications are identified in Table A.3 and further tables referenced by Annex A.

If a claim of conformance is made for support in the agent role, the implementation shall support one or more instances of the log managed object class identified in Table A.4. In the agent role, conformance may also be claimed to subclasses of the log record object class.

The implementation shall support the transfer syntax derived from the encoding rules specified in CCITT Rec. X.209 | ISO/IEC 8825 named {joint-iso-ccitt asn1(1) basicEncoding(1)} for the abstract data types referenced by the definitions for which support is claimed.

NOTE – Prior to the publication of this amendment, this Recommendation | International Standard identified general and dependent conformance classes. A claim of conformance similar to general conformance class can be made by stating support in the manager role, the agent role, or both roles, for the log control functional unit in Table A.2. A claim of conformance similar to dependent conformance class can be made by stating support for at least one of the items in Tables A.3 or A.4.

13.2 Dynamic conformance

Implementations claiming to conform to this Recommendation | International Standard shall support the elements of procedure and definitions of semantics corresponding to the definitions for which support is claimed.

13.3 Management implementation conformance statement requirements

Any MCS proforma, MICS proforma, MOCS proforma, and MRCS proforma which conforms to this Recommendation | International Standard shall be technically identical to the proformas specified in Annexes A, B, C and D preserving table numbering and the index numbers of items, and differing only in pagination and page headers.

The supplier of an implementation which is claimed to conform to this Recommendation | International Standard shall complete a copy of the Management Conformance Summary (MCS) provided in Annex A as part of the conformance requirements together with any other ICS proformas referenced as applicable from that MCS. An ICS which conforms to this Recommendation | International Standard shall:

- describe an implementation which conforms to this Recommendation | International Standard;
- have been completed in accordance with the instructions for completion given in ITU-T Rec. X.724 | ISO/IEC 10165-6;
- include the information necessary to uniquely identify both the supplier and the implementation."

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

9) *Relabel Annexes A and B as E and F respectively, and insert the following annexes:*

Annex A

MCS proforma[3)]

(This annex forms an integral part of this Recommendation | International Standard)

A.1 Introduction

A.1.1 Purpose and structure

The Management Conformance Summary (MCS) is a statement by a supplier that identifies an implementation and provides information on whether the implementation claims conformance to any of the listed set of documents that specify conformance requirements to OSI management.

The MCS proforma is a document in the form of a questionnaire that when completed by the supplier of an implementation becomes the MCS.

A.1.2 Instructions for completing the MCS proforma to produce a MCS

The supplier of the implementation shall enter an explicit statement in each of the boxes provided. Specific instruction is provided in the text which precedes each table.

A.1.3 Symbols, abbreviations and terms

For all annexes of this Recommendation | International Standard, the following common notations, defined in CCITT Rec. X.291 | ISO/IEC 9646-2 and ITU-T Rec. X.296 | ISO/IEC 9646-7, are used for the Status column:

m Mandatory;

o Optional;

c Conditional;

x Prohibited;

– Not applicable or out of scope.

NOTES

1 'c', 'm', and 'o' are prefixed by "c:" when nested under a conditional or optional item of the same table;

2 'o' may be suffixed by ".N" (where N is a unique number) for selectable options among a set of status values. Support of at least one of the choices (from the items with the same value of N) is required.

For all annexes of this Recommendation | International Standard, the following common notations, defined in CCITT Rec. X.291 | ISO/IEC 9646-2 and ITU-T Rec. X.296 | ISO/IEC 9646-7, are used for the Support column:

Y Implemented;

N Not implemented;

– No answer required;

Ig The item is ignored (i.e. processed syntactically but not semantically).

A.1.4 Table format

Some of the tables in this Recommendation | International Standard have been split because the information is too wide to fit on the page. Where this occurs, the index number of the first block of columns are the index numbers of the corresponding rows of the remaining blocks of columns. A complete table reconstructed from the constituent parts should have the following layout:

Index	First block of columns	Second block of columns	Etc.

3) Users of this Recommendation | International Standard may freely reproduce the MCS proforma in this annex so that it can be used for its intended purpose, and may further publish the completed MCS. Instructions for the MCS proforma are specified in ITU-T Rec. X.724 | ISO/IEC 10165-6.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

In this Recommendation | International Standard the constituent parts of the table appear consecutively, starting with the first block of columns.

When a table with sub-rows is too wide to fit on a page, the continuation table(s) have been constructed with index numbers identical to the index numbers in the corresponding rows of the first table, and with sub-index numbers corresponding to the sub-rows within each indexed row. For example, if Table X.1 has 2 rows and the continuation of Table X.1 has 2 sub-rows for each row, the tables are presented as follows:

Table X.1 – Title

					Support		
Index	A	B	C	D	E	F	G
1	a	b	–				
2	a	b	–				

Table X.1 *(concluded)* – Title

Index	Sub-index	H	I	J	K	L
1	1.1	h	i	j		
	1.2	h	i	j		
2	2.1	h	i	j		
	2.2	h	i	j		

A complete table reconstructed from the constituent parts should have the following layout:

					Support								
Index	A	B	C	D	E	F	G	Sub-index	H	I	J	K	L
1	a	b	–					1.1	h	i	j		
								1.2	h	i	j		
2	a	b	–					2.1	h	i	j		
								2.2	h	i	j		

References made to cells within tables shall be interpreted as references within reconstructed tables. In the example above, the reference X.1/1d corresponds to the blank cell in column G for row with Index 1, and X.1/1.2b corresponds to the blank cell in column L for row with Sub-index 1.2.

A.2 Identification of the implementation

A.2.1 Date of statement

The supplier of the implementation shall enter the date of this statement in the box below. Use the format DD-MM-YYYY.

Date of statement

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

A.2.2 Identification of the implementation

The supplier of the implementation shall enter information necessary to uniquely identify the implementation and the system(s) in which it may reside, in the box below.

A.2.3 Contact

The supplier of the implementation shall provide information on whom to contact if there are any queries concerning the contents of the MCS or any referenced implementation conformance statement, in the box below.

A.3 Identification of the Recommendations | International Standards in which the management information is defined

The supplier of the implementation shall enter the title, reference number and date of the publication of the Recommendations | International Standards which specify the management information to which conformance is claimed, in the box below.

Recommendations	International Standards to which conformance is claimed

A.3.1 Technical corrigenda implemented

The supplier of the implementation shall enter the reference numbers of implemented technical corrigenda which modify the identified Recommendations | International Standards, in the box below.

A.3.2 Amendments implemented

The supplier of the implementation shall state the titles and reference numbers of implemented amendments to the identified Recommendations | International Standards, in the box below.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

A.4 Management conformance summary

The supplier of the implementation shall state the capabilities and features supported and provide a summary of conformance claims to Recommendations I International Standards using the tables in this annex.

The supplier of the implementation shall specify the roles that are supported, in Table A.1.

Table A.1 – Roles

Index	Roles supported	Status	Support	Additional information
1	Manager role support	o.1		
2	Agent role support	o.1		

The supplier of the implementation shall specify support for the systems management functional units, in Table A.2.

Table A.2 – Systems management functional units

		Manager		Agent		
Index	Systems management functional unit name	Status	Support	Status	Support	Additional information
1	log control functional unit	c1		c2		
2	monitor log functional unit	c1		c2		
c1: if A.1/1a then o else –. c2: if A.1/2a then o else –.						

The supplier of the implementation shall specify support for management information in the manager role, in Table A.3.

Table A.3 – Manager role minimum conformance requirement

Index	Item	Status	Support	Additional information
1	Operations on managed objects	c3		
2	State change notification for log managed objects	c4		
3	Object creation notification for log managed objects	c4		
4	Object deletion notification for log managed objects	c4		
5	Attribute value change notification for log managed objects	c4		
6	Processing error alarm notification for log managed objects	c4		
c3: if A.2/1a or A.2/2a then m else (if A.1/1a then o.2 else –). c4: if A.2/1a then m else (if A.2/2a then o.2 else (if A.1/1a then o.2 else –)). NOTE – Manager role minimum conformance requires support for at least one of the items identified in this table. Support for either of the functional units identified in Table A.2 mandates support for some of those items. Conditions c3 and c4 express both of these requirements.				

The supplier of the implementation shall specify support for management information in the agent role, in Table A.4. If additional subclasses of log records are supported, the supplier of the implementation shall list the classes in the Additional information column.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

Table A.4 – Agent role minimum conformance requirement

Index	Item	Status	Support	Additional information
1	Log managed object class	c5		
2	Sub-classes of log records associated with notifications emitted by the log managed object	c6		
3	Additional sub-classes of log records	c7		

c5: if A.1/2a then m else –.

c6: if A.1/2a and A.5/1a then m else –.

c7: if A.1/2a then o else –.

NOTE – Condition c6 makes it mandatory, if logging is supported, to support the event log records associated with the notifications supported.

Table A.5 – Logging of event records

Index		Status	Support	Additional information
1	Does the implementation support logging of event records in agent role?	c8		

c8: if A.1/2a then o else –.

The supplier of the implementation shall provide information on claims of conformance to any of the Recommendations | International Standards summarized in Tables A.6 to A.9. For each Recommendation | International Standard that the supplier of the implementation claims conformance to, the corresponding conformance statement(s) shall be completed, or referenced by, the MCS. The supplier of the implementation shall complete the Support, Table numbers and Additional information columns.

In Tables A.6 to A.9, the Status column is used to indicate whether the supplier of the implementation is required to complete the referenced tables or referenced items. Conformance requirements are as specified in the referenced tables or referenced items and are not changed by the value of the MCS Status column. Similarly, the Support column is used by the supplier of the implementation to indicate completion of the referenced tables or referenced items.

Table A.6 – PICS support summary

Index	Identification of the document that includes the PICS proforma	Table numbers of PICS proforma	Description	Constraints and values	Status	Support	Table numbers of PICS	Additional information
1	CCITT Rec. X.730 | ISO/IEC 10164-1	Annex E all tables	SM application context	OBJECT IDENTIFIER	m			

NOTE – Conformance to the MAPDUs defined in this Recommendation | International Standard can be claimed by completing the corresponding tables in the MICS and MOCS annexes of the referenced Recommendations | International Standards.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table A.7 – MOCS support summary

Index	Identification of the document that includes the MOCS proforma	Table numbers of MOCS proforma	Description	Constraints and values	Status	Support	Table numbers of MOCS	Additional information
1	CCITT Rec. X.730 | ISO/IEC 10164-1	Annex C all tables	objectCreation, objectDeletion and attributeValueChange records	–	c9			
2	CCITT Rec. X.731 | ISO/IEC 10164-2	Annex C all tables	stateChange record	–	c9			
3	CCITT Rec. X.733 | ISO/IEC 10164-4	Annex C all tables	alarmRecord	–	c9			
4	CCITT Rec. X.735 | ISO/IEC 10164-6	Annex C all tables	log	–	m			
c9: if A.4/2a then m else –.								

Table A.8 – MRCS support summary

Index	Identification of the document that includes the MRCS proforma	Table numbers of MRCS proforma	Description	Constraints and values	Status	Support	Table numbers of MRCS	Additional information
1	CCITT Rec. X.735 | ISO/IEC 10164-6	Item D.1/1	logRecord-log name binding	–	c10			
1	CCITT Rec. X.735 | ISO/IEC 10164-6	Item D.1/2	log-system name binding	–	c11			
c10: if A.5/1a then o else –. c11: if A.4/1a then o else –.								

Table A.9 – MICS support summary

Index	Identification of the document that includes the MICS proforma	Table numbers of MICS proforma	Description	Constraints and values	Status	Support	Table numbers of MICS	Additional information
1	CCITT Rec. X.735 | ISO/IEC 10164-6	Tables B.1 and B.2	management operations	–	c12			
2	CCITT Rec. X.730 | ISO/IEC 10164-1	Table B.1	objectCreation, objectDeletion and attributeValueChange notifications	–	c13			
3	CCITT Rec. X.731 | ISO/IEC 10164-2	Table B.1	stateChange notification	–	c14			
4	CCITT Rec. X.733 | ISO/IEC 10164-4	Item B.1/4	processingErrorAlarm notification	–	c15			
c12: if A.3/1a then m else –. c13: if A.3/3a or A.3/4a or A.3/5a then m else –. c14: if A.3/2a then m else –. c15: if A.3/6a then m else –.								

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

Annex B

MICS proforma[4)]

(This annex forms an integral part of this Recommendation | International Standard)

B.1 Introduction

The purpose of this MICS proforma is to provide a mechanism for a supplier of an implementation which claims conformance, in the manager role, to management information specified in this Recommendation | International Standard, to provide conformance information in a standard form.

B.2 Instructions for completing the MICS proforma to produce a MICS

The MICS proforma contained in this annex is comprised of information in tabular form, in accordance with ITU-T Rec. X.724 | ISO/IEC 10165-6. In addition to the general guidance given in ITU-T Rec. X.724 | ISO/IEC 10165-6, the Additional information column shall be used to identify the object classes for which the management operations are supported. The supplier of the implementation shall state which items are supported in the tables below and if necessary, provide additional information.

B.3 Symbols, abbreviations and terms

The following abbreviation is used throughout the MICS proforma:

dmi-att joint-iso-ccitt ms(9) smi(3) part2(2) attribute(7)

The notations used for the Status and Support columns are specified in A.1.3.

B.4 Statement of conformance to the management information

B.4.1 Attributes

The specifier of a manager role implementation that claims to support management operations on the attributes specified in this Recommendation | International Standard shall import a copy of Table B.1 and complete it.

4) Users of this Recommendation | International Standard may freely reproduce the MICS proforma in this annex so that it can be used for its intended purpose, and may further publish the completed MICS.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table B.1 – Attribute support

Index	Attribute template label	Value of object identifier for the attribute	Constraints and values	Set by create		Get	
				Status	Support	Status	Support
1	objectClass	{dmi-att 65}	–	c1		o.3	
2	nameBinding	{dmi-att 63}	–	c1		o.3	
3	packages	{dmi-att 66}	–	c1		o.3	
4	allomorphs	{dmi-att 50}	–	c1		o.3	
5	logId	{dmi-att 2}	–	c1		o.3	
6	discriminatorConstruct	{dmi-att 56}	–	c1		o.3	
7	administrativeState	{dmi-att 31}	–	c1		o.3	
8	operationalState	{dmi-att 35}	–	–		o.3	
9	availabilityStatus	{dmi-att 33}	–	–		o.3	
10	logFullAction	{dmi-att 58}	–	c1		o.3	
11	maxLogSize	{dmi-att 62}	–	c1		o.3	
12	currentLogSize	{dmi-att 54}	–	–		o.3	
13	numberOfRecords	{dmi-att 64}	–	c1		o.3	
14	capacityAlarmThreshold	{dmi-att 67}	–	c1		o.3	
15	startTime	{dmi-att 68}	–	c1		o.3	
16	stopTime	{dmi-att 69}	–	c1		o.3	
17	intervalsOfDay	{dmi-att 57}	–	c1		o.3	
18	weekMask	{dmi-att 71}	–	c1		o.3	
19	schedulerName	{dmi-att 67}	–	c1		o.3	
c1: if B.2/1a then o else –.							

Table B.1 *(concluded)* – Attribute support

Index	Replace		Add		Remove		Set to default		Additional information
	Status	Support	Status	Support	Status	Support	Status	Support	
1	–		–		–		–		
2	–		–		–		–		
3	–		–		–		–		
4	–		–		–		–		
5	–		–		–		–		
6	o.3		–		–		o.3		
7	o.3		–		–		–		
8	–		–		–		–		
9	–		–		–		–		
10	o.3		–		–		–		
11	o.3		–		–		–		
12	–		–		–		–		
13	–		–		–		–		
14	o.3		o.3		o.3		–		
15	o.3		–		–		–		
16	o.3		–		–		o.3		
17	o.3		o.3		o.3		o.3		
18	o.3		o.3		o.3		o.3		
19	–		–		–		–		

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

B.4.2 Create and delete management operations

The specifier of a manager role implementation that claims to support the create or delete management operations on the managed objects specified in this Recommendation | International Standard shall import a copy of Table B.2 and complete it.

Table B.2 – Create and delete support

Index	Operation	Constraints and values	Status	Support	Additional information
1	Create support	log managed object	o.3		
1.1	Create with reference object	–	c:o		
2	Delete support	log and logRecord managed objects	o.3		

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Annex C

MOCS proforma[5)]

(This annex forms an integral part of this Recommendation | International Standard)

C.1 Introduction

The purpose of this MOCS proforma is to provide a mechanism for a supplier of an implementation which claims conformance, in the agent role, to a managed object class, to provide conformance information in a standard form.

C.2 Instructions for completing the MOCS proforma to produce a MOCS

The MOCS proforma contained in this annex is comprised of information in tabular form, in accordance with ITU-T Rec. X.724 | ISO/IEC 10165-6. The supplier of the implementation shall state which items are supported in the tables below and if necessary, provide additional information.

C.3 Symbols, abbreviations and terms

The following abbreviations are used throughout the MOCS proforma:

dmi-att joint-iso-ccitt ms(9) smi(3) part2(2) attribute(7)

dmi-moc joint-iso-ccitt ms(9) smi(3) part2(2) managedObjectClass(3)

dmi-nb joint-iso-ccitt ms(9) smi(3) part2(2) nameBinding(6)

dmi-not joint-iso-ccitt ms(9) smi(3) part2(2) notification(10)

dmi-pkg joint-iso-ccitt ms(9) smi(3) part2(2) package(4)

The notations used for the Status and Support columns are specified in A.1.3.

The following conditional expression is commonly used throughout this MOCS proforma:

c1: if C.3/3a or C.3/5a or C.3/6a or C.3/7a or C.3/8a or C.3/9a or C.3/10a or C.3/11a, then m else –.

C.4 Log managed object class

C.4.1 Statement of conformance to the managed object class

The supplier of the implementation shall state whether or not all mandatory features of the log managed object class are supported, and if the actual class supported is the same as the managed object class to which conformance is claimed, in Table C.1.

Table C.1 – Managed object class support

Index	Managed object class template label	Value of object identifier for the managed object class	Does the implementation support all mandatory features? (Y/N)	Is the actual class the same as the managed object class to which conformance is claimed? (Y/N)
1	log	{dmi-moc 6}		

5) Users of this Recommendation | International Standard may freely reproduce the MOCS proforma in this annex so that it can be used for its intended purpose, and may further publish the completed MOCS. Instructions for completing the MOCS proforma are specified in ITU-T Rec. X.724 | ISO/IEC 10165-6.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

If the answer to the actual class question in the managed object class support table is "N", the supplier of the implementation shall supply the actual class support details, in Table C.2.

Table C.2 – Actual class support

Index	Actual managed object class template label	Value of object identifier for the managed object class	Additional information
1			

C.4.2 Packages

See Table C.3.

Table C.3 – Package support

Index	Package template label	Value of object identifier for the package	Constraints and values	Status	Support	Additional information
1	topPackage	–	–	m		
2	packagesPackage	{dmi-pkg 16}	–	c1		
3	allomorphicPackage	{dmi-pkg 17}	–	c2		
4	logPackage	–	–	m		
5	finiteLogSizePackage	{dmi-pkg 12}	–	o		
6	logAlarmPackage	{dmi-pkg 13}	–	o		
7	availabilityStatusPackage	{dmi-pkg 22}	–	c3		
8	durationPackage	{dmi-pkg 26}	–	o		
9	dailySchedulingPackage	{dmi-pkg 25}	–	o		
10	weeklySchedulingPackage	{dmi-pkg 29}	–	o		
11	externalSchedularPackage	{dmi-pkg 27}	–	o		
c2: if C.1/1b then – else m. c3: if C.3/9a or C.3/10a or C.3/11a then m else –.						

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

C.4.3 Attributes

See Table C.4.

Table C.4 – Attribute support

				Set by create		Get	
Index	Attribute template label	Value of object identifier for the attribute	Constraints and values	Status	Support	Status	Support
1	objectClass	{dmi-att 65}	–	m		m	
2	nameBinding	{dmi-att 63}	–	o		m	
3	packages	{dmi-att 66}	–	c4		c1	
4	allomorphs	{dmi-att 50}	–	c5		c6	
5	logId	{dmi-att 2}	–	o		m	
6	discriminatorConstruct	{dmi-att 56}	see C.4.5	m		m	
7	administrativeState	{dmi-att 31}	–	m		m	
8	operationalState	{dmi-att 35}	–	x		m	
9	availabilityStatus	{dmi-att 33}	Permitted: LogAvailability Required: UnscheduledLogAvailability if C.3/7a off-duty required	x		m	
10	logFullAction	{dmi-att 58}	"wrap" and "halt"	m		m	
11	maxLogSize	{dmi-att 62}	–	c7		c7	
12	currentLogSize	{dmi-att 54}	–	c14		c7	
13	numberOfRecords	{dmi-att 64}	–	c14		c7	
14	capacityAlarmThreshold	{dmi-att 67}	SET OF INTEGER (0..100) treat as counter threshold	c8		c8	
15	startTime	{dmi-att 68}	–	c9		c9	
16	stopTime	{dmi-att 69}	DMI default	c9		c9	
17	intervalsOfDay	{dmi-att 57}	DMI default	c10		c10	
18	weekMask	{dmi-att 71}	DMI default	c11		c11	
19	schedulerName	{dmi-att 67}	–	c12		c13	

c4: if C.3/2a then o else –.
c5: if C.3/3a then o else –.
c6: if C.3/3a then m else –.
c7: if C.3/5a then m else –.
c8: if C.3/6a then m else –.
c9: if C.3/8a then m else –.
c10: if C.3/9a then m else –.
c11: if C.3/10a then m else –.
c12: if C.3/11a then o else –.
c13: if C.3/11a then m else –.
c14: if C.1/1b then x else –.

(continued)

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table C.4 *(concluded)* – Attribute support

	Replace		Add		Remove		Set to default		
Index	Status	Support	Status	Support	Status	Support	Status	Support	Additional information
1	x		–		–		x		
2	c14		–		–		c14		
3	x		x		x		x		
4	c14		c14		c14		c14		
5	c14		–		–		c14		
6	m		–		–		m		
7	m		–		–		c14		
8	x		–		–		x		
9	x		x		x		x		
10	m		–		–		c14		
11	c7		–		–		c14		
12	c14		–		–		c14		
13	c14		–		–		c14		
14	c8		c8		c8		c14		
15	c9		–		–		c14		
16	c9		–		–		c9		
17	c10		c10		c10		c10		
18	c11		c11		c11		c11		
19	x		–		–		x		

C.4.4 Notifications

See Table C.5.

Table C.5 – Log object notification support

					Support		
Index	Notification type template label	Value of object identifier for the notification type	Constraints and values	Status	Confirmed	Non-confirmed	Additional information
1	stateChange	{dmi-not 14}	–	m			
2	objectCreation	{dmi-not 6}	–	m			
3	objectDeletion	{dmi-not 7}	–	m			
4	attributeValueChange	{dmi-not 1}	–	m			
5	processingErrorAlarm	{dmi-not 10}	–	m			

(continued)

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table C.5 *(continued)* – Log object notification support

Index	Sub-index	Notification field name label	Value of object identifier for the attribute type associated with the field	Constraints and values	Status	Support	Additional information
1	1.1	sourceIndicator	{dmi-att 26}	ENUMERATED 0 to 2	o		
	1.2	attributeIdentifierList	{dmi-att 8}	–	o		
	1.3	stateChangeDefinition	{dmi-att 28}	–	m		
	1.3.1	attributeID	–	–	m		
	1.3.2	oldAttributeValue	–	–	o		
	1.3.3	newAttributeValue	–	–	m		
	1.4	notificationIdentifier	{dmi-att 16}	INTEGER	c15		
	1.5	correlatedNotifications	{dmi-att 12}	–	o		
	1.5.1	correlatedNotifications	–	–	c:m		
	1.5.2	sourceObjectInst	–	–	c:o		
	1.5.2.1	distinguishedName	–	–	c:o.4		
	1.5.2.2	nonSpecificForm	–	–	c:o.4		
	1.5.2.3	localDistinguishedName	–	–	c:o.4		
	1.6	additionalText	{dmi-att 7}	–	o		
	1.7	additionalInformation	{dmi-att 6}	–	o		
2	2.1	sourceIndicator	{dmi-att 26}	ENUMERATED 0 to 2	o		
	2.2	attributeList	{dmi-att 9}	–	o		
	2.3	notificationIdentifier	{dmi-att 16}	INTEGER	c16		
	2.4	correlatedNotifications	{dmi-att 12}	–	o		
	2.4.1	correlatedNotifications	–	–	c:m		
	2.4.2	sourceObjectInst	–	–	c:o		
	2.4.2.1	distinguishedName	–	–	c:o.5		
	2.4.2.2	nonSpecificForm	–	–	c:o.5		
	2.4.2.3	localDistinguishedName	–	–	c:o.5		
	2.5	additionalText	{dmi-att 7}	–	o		
	2.6	additionalInformation	{dmi-att 6}	–	o		
3	3.1	sourceIndicator	{dmi-att 26}	ENUMERATED 0 to 2	o		
	3.2	attributeList	{dmi-att 9}	–	o		
	3.3	notificationIdentifier	{dmi-att 16}	INTEGER	c17		
	3.4	correlatedNotifications	{dmi-att 12}	–	o		
	3.4.1	correlatedNotifications	–	–	c:m		
	3.4.2	sourceObjectInst	–	–	c:o		
	3.4.2.1	distinguishedName	–	–	c:o.6		
	3.4.2.2	nonSpecificForm	–	–	c:o.6		
	3.4.2.3	localDistinguishedName	–	–	c:o.6		
	3.5	additionalText	{dmi-att 7}	–	o		
	3.6	additionalInformation	{dmi-att 6}	–	o		

c15: if C.5/1.5a then m else o.

c16: if C.5/2.4a then m else o.

c17: if C.5/3.4a then m else o.

(continued)

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table C.5 *(continued)* – Log object notification support

Index	Sub-index	Notification field name label	Value of object identifier for the attribute type associated with the field	Constraints and values	Status	Support	Additional information
4	4.1	sourceIndicator	{dmi-att 26}	ENUMERATED 0 to 2	o		
	4.2	attributeIdentifierList	{dmi-att 8}	–	o		
	4.3	attributeValueChange Definition	{dmi-att 10}	–	m		
	4.3.1	attributeID	–	–	m		
	4.3.2	oldAttributeValue	–	–	o		
	4.3.3	newAttributeValue	–	–	m		
	4.4	notificationIdentifier	{dmi-att 16}	INTEGER	c18		
	4.5	correlatedNotifications	{dmi-att 12}	–	o		
	4.5.1	correlatedNotifications	–	–	c:m		
	4.5.2	sourceObjectInst	–	–	c:o		
	4.5.2.1	distinguishedName	–	–	c:o.7		
	4.5.2.2	nonSpecificForm	–	–	c:o.7		
	4.5.2.3	localDistinguishedName	–	–	c:o.7		
	4.6	additionalText	{dmi-att 7}	–	o		
	4.7	additionalInformation	{dmi-att 6}	–	o		
5	5.1	probableCause	{dmi-att 18}	–	m		
	5.1.1	globalValue	–	OBJECT IDENTIFIER	o.8		
	5.1.2	localValue	–	INTEGER	o.8		
	5.2	specificProblems	{dmi-att 27}	–	o		
	5.2.1	global	–	OBJECT IDENTIFIER	c:o.9		
	5.2.2	local	–	INTEGER	c:o.9		
	5.3	perceivedSeverity	{dmi-att 17}	ENUMERATED 0 to 5	m		
	5.4	backedUpStatus	{dmi-att 11}	–	o		
	5.5	backUpObject	{dmi-att 40}	for backUp relationships	o		
	5.5.1	distinguishedName	–	–	c:o.10		
	5.5.2	nonSpecificForm	–	–	c:o.10		
	5.5.3	localDistinguishedName	–	–	c:o.10		
	5.6	trendIndication	{dmi-att 30}	ENUMERATED 0 to 2	o		
	5.7	thresholdInfo	{dmi-att 29}	for threshold attributes	o		
	5.7.1	triggeredThreshold	–	–	c:m		
	5.7.2	observedValue	–	–	c:m		
	5.7.2.1	integer	–	–	c:o.11		
	5.7.2.2	real	–	–	c:o.11		
	5.7.3	thresholdLevel	–	–	c:o		
	5.7.3.1	up	–	–	c:o.12		
	5.7.3.1.1	high	–	–	c:m		
	5.7.3.1.1.1	integer	–	–	c:o.13		
	5.7.3.1.1.2	real	–	–	c:o.13		
	5.7.3.1.2	low	–	for guage thresholds	c:o		
	5.7.3.1.2.1	integer	–	–	c:o.14		
	5.7.3.1.2.2	real	–	–	c:o.14		
c18: if C.5/4.5a then m else o.							

(continued)

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table C.5 *(concluded)* – Log object notification support

Index	Sub-index	Notification field name label	Value of object identifier for the attribute type associated with the field	Constraints and values	Status	Support	Additional information
5	5.7.3.2	down	–	–	c:o.12		
	5.7.3.2.1	high	–	–	c:m		
	5.7.3.2.1.1	integer	–	–	c:o.15		
	5.7.3.2.1.2	real	–	–	c:o.15		
	5.7.3.2.2	low	–	–	c:m		
	5.7.3.2.2.1	integer	–	–	c:o.16		
	5.7.3.2.2.2	real	–	–	c:o.16		
	5.7.4	armTime	–	–	c:o		
	5.8	notificationIdentifier	{dmi-att 16}	INTEGER	c19		
	5.9	correlatedNotifications	{dmi-att 12}	–	o		
	5.9.1	correlatedNotifications	–	–	c:m		
	5.9.2	sourceObjectInst	–	–	c:o		
	5.9.2.1	distinguishedName	–	–	c:o.17		
	5.9.2.2	nonSpecificForm	–	–	c:o.17		
	5.9.2.3	localDistinguishedName	–	–	c:o.17		
	5.10	stateChangeDefinition	{dmi-att 28}	–	o		
	5.10.1	attributeId	–	–	c:m		
	5.10.1.1	global	–	OBJECT IDENTIFIER	c:o.18		
	5.10.1.2	local	–	INTEGER	c:o.18		
	5.10.2	oldAttributeValue	–	–	c:o		
	5.10.3	newAttributeValue	–	–	c:m		
	5.11	monitoredAttributes	{dmi-att 15}	–	o		
	5.12	proposedRepairActions	{dmi-att 19}	–	o		
	5.12.1	global	–	OBJECT IDENTIFIER	c:o.19		
	5.12.2	local	–	INTEGER	c:o.19		
	5.13	additionalText	{dmi-att 7}	–	o		
	5.14	additionalInformation	{dmi-att 6}	–	o		
c19: if C.5/5.9a then m else o.							

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

C.4.5 Discriminator construct complexity requirements

The supplier of the implementation shall list the attributes, derived from notifications, that it is able to discriminate, in Table C.6.

Table C.6 – Discrimination input attribute requirements

Notification attribute name	Value of object identifier for the attribute type associated with the field	Additional information
NOTE – These attributes may include the managedObjectClass, eventType, managedObjectInstance, perceivedSeverity, and securityAlarmSeverity attributes specified in CCITT Rec. X.721 | ISO/IEC 10165-2.		

Table C.7 – DiscriminatorConstruct CMISFilter parameter support

		Agent			Manager			
Index	Parameter name	Status	Support	Maximum number of FilterItem	Status	Support	Maximum number of FilterItem	Additional information
1	item	m		–	m		–	
2	and	m			m			
3	or	m			m			
4	not	m		–	m		–	

Table C.8 – Discriminator Construct CMISFilter complexity limitations

Index	Complexity limitation	Agent	Manager	Additional information
1	Maximum nesting depth of CMISFilter expressions in an "AND"			
2	Maximum nesting depth of CMISFilter expressions that may occur in an "OR"			
3	Maximum number of FilterItem parameters in a CMISFilter parameter			

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Table C.9 – FilterItem Parameter Support

		Agent			Manager			
Index	Parameter name	Status	Support	Constraints	Status	Support	Constraints	Additional information
1	equality	o.20		–	m		–	
2	substrings	o.20		–	m		–	
2.1	initialString	m		–	m		–	
2.1.1	attributeId	m		–	m		–	
2.1.2	string	m		–	m		–	
2.2	anyString	m		–	m		–	
2.2.1	attributeId	m		–	m		–	
2.2.2	string	m		–	m		–	
2.3	finalString	m		–	m		–	
2.3.1	attributeId	m		–	m		–	
2.3.2	string	m		–	m		–	
3	greaterOrEqual	o.20		–	m		–	
4	lessOrEqual	o.20		–	m		–	
5	present	o.20		–	m		–	
6	subsetOf	o.20		–	m		–	
7	supersetOf	o.20		–	m		–	
8	nonNullSetIntersection	o.20		–	m		–	

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Annex D

MRCS proforma for name binding[6)]

(This annex forms an integral part of this Recommendation I International Standard)

D.1 Introduction

The purpose of this MRCS proforma for name bindings is to provide a mechanism for a supplier which claims conformance, in the agent role, to a name binding to provide conformance information in a standard form.

D.2 Instructions for completing the MRCS proforma for name binding to produce an MRCS

The MRCS proforma contained in this annex is comprised of information in tabular form, in accordance with ITU-T Rec. X.724 I ISO/IEC 10165-6. The supplier of the implementation shall state which items are supported in Table D.1 and if necessary provide additional information.

Notations used in the Status and Support columns are specified in A.1.3.

D.3 Symbols, abbreviations and terms

The following abbreviation is used in this MRCS proforma:

dmi-nb joint-iso-ccitt ms(9) smi(3) part2(2) nameBinding(6)

D.4 Statement of conformance to the name binding

See Table D.1.

Table D.1 – Name binding support

Index	Name binding template label	Value of object identifier for the name binding	Constraints and values	Status	Support	Additional information
1	logRecord-log	{dmi-nb 3}	–	o		
2	log-system	{dmi-nb 2}	–	o		

Table D.1 *(concluded)* – Name binding support

Index	Sub-index	Operation	Constraints and values	Status	Support	Additional information
1	1.1	Create support	–	x		
	1.1.1	Create with reference object	–	–		
	1.1.2	Create with automatic instance naming	–	–		
	1.2	Delete support	–	m		
	1.2.1	Delete only if no contained objects	–	m		
	1.2.2	Delete contained objects	–	–		
2	2.1	Create support	–	m		
	2.1.1	Create with reference object	–	m		
	2.1.2	Create with automatic instance naming	–	m		
	2.2	Delete support	–	m		
	2.2.1	Delete only if no contained objects	–	m		
	2.2.2	Delete contained objects	–	–		

6) Users of this Recommendation I International Standard may freely reproduce the MRCS proforma in this annex so that it can be used for its intended purpose, and may further publish the completed MRCS. Instructions for completing the MRCS proforma are specified in ITU-T Rec. X.724 I ISO/IEC 10165-6.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

© ISO/IEC

ICS 35.100.70

Descriptors: data processing, information interchange, network interconnection, open systems interconnection, application layer, management, implementation.

Price based on 21 pages

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Not for Resale

10164 PT*6 93 ■ 4851903 0547753 533 ■

INTERNATIONAL STANDARD

ISO/IEC 10164-6

First edition
1993-11-01

Information technology — Open Systems Interconnection — Systems Management: Log control function

Technologies de l'information — Interconnexion de systèmes ouverts (OSI) — Gestion-système: Fonction de contrôle de journal



Reference number
ISO/IEC 10164-6:1993(E)

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Contents

Page

1 Scope 1

2 Normative references 1

2.1 Identical Recommendations | International Standards 2

2.2 Paired Recommendations | International Standards equivalent in technical content 2

2.3 Additional references 3

3 Definitions 3

3.1 Basic reference model definitions 3

3.2 Service convention definitions 3

3.3 Management framework definitions 3

3.4 Systems management overview definitions 3

3.5 Event report management function definitions 3

3.6 Common management information service definitions 4

3.7 OSI conformance testing definitions 4

3.8 Additional definitions 4

4 Abbreviations 4

5 Conventions 4

6 Requirements 4

7 Model for the log control function 5

7.1 Introduction 5

7.2 The log model 6

© ISO/IEC 1993
All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

8 Generic definitions 7

8.1 Managed objects 7

8.2 Imported generic definitions 11

9 Service definition 12

9.1 Introduction 12

9.2 Initiation of logging 12

9.3 Termination of logging 13

9.4 Modification of logging attributes and suspension and resumption of logging 13

9.5 Retrieving logging attributes 13

9.6 Retrieval of log records 13

9.7 Deletion of log records 13

10 Functional units 13

11 Protocol 14

11.1 Elements of procedures 14

11.2 Abstract syntax 14

11.3 Negotiation of functional units 15

12 Relationship with other functions 15

13 Conformance 16

13.1 General conformance class requirements 16

13.2 Dependent conformance class requirements 16

13.3 Conformance to support managed object definitions 16

Annexes

A Considerations for System Implementation Capabilities Statements 17

B Conditions on attribute values for logging 17

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

International Standard ISO/IEC 10164-6 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Sub-Committee SC21, *Open Systems interconnection, data management and open distributed processing*, in collaboration with CCITT. The identical text is published as CCITT Recommendation X.735.

ISO/IEC 10164 consists of the following parts, under the general title *Information technology – Open Systems Interconnection – Systems Management*:

- *Part 1: Object management function*
- *Part 2: State management function*
- *Part 3: Attributes for representing relationships*
- *Part 4: Alarm reporting function*
- *Part 5: Event report management function*
- *Part 6: Log control function*
- *Part 7: Security alarm reporting function*
- *Part 8: Security audit trail function*
- *Part 9: Objects and attributes for access control*
- *Part 10: Accounting metering function*
- *Part 11: Workload monitoring function*
- *Part 12: Test management function*
- *Part 13: Summarization function*
- *Part 14: Confidence and diagnostic test categories*
- *Part 15: Scheduling function*

Annexes A and B of this International Standard are for information only.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Introduction

ISO/IEC 10164 is a multipart standard developed according to ISO 7498 and ISO/IEC 7498-4. ISO/IEC 10164 is related to the following International Standards

- ISO/IEC 9595:1991, *Information technology – Open Systems Interconnection – Common management information service definition*;
- ISO/IEC 9596-1:1991, *Information technology – Open Systems Interconnection – Common management information protocol – Part 1: Specification*;
- ISO/IEC 10040:1992, *Information technology – Open Systems Interconnection – Systems management overview*;
- ISO/IEC 10165:1992, *Information technology – Open Systems Interconnection – Structure of management information.*

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

INTERNATIONAL STANDARD

CCITT RECOMMENDATION

INFORMATION TECHNOLOGY – OPEN SYSTEMS INTERCONNECTION – SYSTEMS MANAGEMENT: LOG CONTROL FUNCTION

1 Scope

This Recommendation | International Standard defines a Systems Management Function which may be used by an application process in a centralized or decentralized management environment to interact for the purpose of systems management, as defined by CCITT Rec. X.700 | ISO/IEC 7498-4. This CCITT Recommendation | International Standard defines the Log Control function and consists of services and two functional units. This function is positioned in the application layer of the CCITT Rec. X.200 | ISO/IEC 7498-1 and is defined according to the model provided by ISO/IEC 9545. The role of systems management functions is described by CCITT Rec. X.701 | ISO/IEC 10040.

This CCITT Recommendation | International Standard

- establishes user requirements for the Log Control function;
- establishes models that relate the services provided by the function to user requirements;
- defines the services provided by the function;
- specifies the protocol that is necessary in order to provide the services;
- defines the relationship between the services and SMI operations and notifications;
- defines relationships with other systems management functions;
- specifies conformance requirements.

This CCITT Recommendation | International Standard does not

- define the nature of any implementation intended to provide the Log Control function;
- specify the manner in which management is accomplished by the user of the Log Control function;
- define the nature of any interactions which result in the use of the Log Control function;
- specify the services necessary for the establishment, normal and abnormal release of a management association;
- specify the authorization requirements for the use of the Log Control function or for any associated activity;
- define the definitions of managed objects related to the management of particular protocol machines.

2 Normative references

The following CCITT Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent editions of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The CCITT Secretariat maintains a list of currently valid CCITT Recommendations.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

2.1 Identical Recommendations | International Standards

- CCITT Recommendation X.701 (1992) | ISO/IEC 10040:1992, *Information technology – Open Systems Interconnection – Systems management overview.*

- CCITT Recommendation X.721 (1992) | ISO/IEC 10165-2:1992, *Information technology – Open Systems Interconnection – Structure of management information – Part 2: Definition of management information.*

- CCITT Recommendation X.730 (1992) | ISO/IEC 10164-1:1993, *Information technology – Open Systems Interconnection – Systems Management – Part 1: Object management function.*

- CCITT Recommendation X.731 (1992) | ISO/IEC 10164-2:1993, *Information technology – Open Systems Interconnection – Systems Management – Part 2: State management function.*

- CCITT Recommendation X.733 (1992) | ISO/IEC 10164-4:1992, *Information technology – Open Systems Interconnection – Systems Management – Part 4: Alarm reporting function.*

- CCITT Recommendation X.734 (1992) | ISO/IEC 10164-5:1993, *Information technology – Open Systems Interconnection – Systems Management – Part 5: Event report management function.*

2.2 Paired Recommendations | International Standards equivalent in technical content

- CCITT Recommendation X.200 (1988), *Reference Model of Open Systems Interconnection for CCITT Applications.*

  ISO 7498:1984, *Information processing systems – Open Systems Interconnection – Basic Reference Model.*

- CCITT Recommendation X.210 (1988), *Open Systems Interconnection Layer Service Definition Conventions.*

  ISO/TR 8509:1987, *Information processing systems – Open Systems Interconnection – Service conventions.*

- CCITT Recommendation X.208 (1988), *Specification of Abstract Syntax Notation One (ASN.1).*

  ISO/IEC 8824:1990, *Information technology – Open Systems Interconnection – Specification of Abstract Syntax Notation One (ASN.1).*

- CCITT Recommendation X.209 (1988), *Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1).*

  ISO/IEC 8825:1990, *Information technology – Open Systems Interconnection – Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1).*

- CCITT Recommendation X.700 (1992), *Management Framework Definition for Open Systems Interconnection for CCITT Applications.*

  ISO/IEC 7498-4:1989, *Information processing systems – Open Systems Interconnection – Basic Reference Model – Part 4: Management framework.*

- CCITT Recommendation X.710 (1991), *Common Management Information Service Definition for CCITT Applications.*

  ISO/IEC 9595:1991, *Information technology – Open Systems Interconnection – Common management information service defintion.*

- CCITT Recommendation X.290 (1992), *OSI Conformance Testing Methodology and Framework for protocol Recommendations for CCITT applications – General concepts.*

  ISO/IEC 9646-1:1991, *Information technology – Open Systems Interconnection – Conformance testing methodology and framework – Part 1: General concepts.*

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

2.3 Additional references

- ISO/IEC 9545:1989, *Information technology – Open Systems Interconnection – Application Layer structure.*

3 Definitions

For the purposes of this Recommendation | International Standard, the following definitions apply.

3.1 Basic reference model definitions

This Recommendation | International Standard makes use of the following term defined in Recommendation X.200 | ISO 7498.

systems management

3.2 Service convention definitions

This Recommendation | International Standard makes use of the following term defined in CCITT Rec. X.210 | ISO/TR 8509.

primitive

3.3 Management framework definitions

This Recommendation | International Standard makes use of the following terms defined in CCITT Rec. X.700 | ISO/IEC 7498-4.

a) management information;

b) managed object;

c) systems-management-application-entity.

3.4 Systems management overview definitions

This Recommendation | International Standard makes use of the following terms defined in CCITT Rec. X.701 | ISO/IEC 10040.

a) agent role;

b) dependent conformance;

c) general conformance;

d) manager role;

e) management application protocol;

f) management support object;

g) notification;

h) systems management operation;

i) systems management functional unit.

3.5 Event report management function definitions

This Recommendation | International Standard makes use of the following term defined in CCITT Rec. X.734 | ISO/IEC 10164-5.

discriminator input object

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

3.6 Common management information service definitions

This Recommendation | International Standard makes use of the following term defined in CCITT Rec. X.710 | ISO/IEC 9595.

attribute

3.7 OSI conformance testing definitions

This Recommendation | International Standard makes use of the following term defined in CCITT Rec. X.290 | ISO/IEC 9646-1.

system conformance statement

3.8 Additional definitions

3.8.1 **log:** A management support object class that models resources used as a repository for log records.

3.8.2 **log record:** A management support object class that models units of information stored in a log.

3.8.3 **potential log record:** A type of discriminator input object that is defined for the purpose of discriminating information to be included in the log. A potential log record consists of all information required for the inclusion of a log record in the log.

4 Abbreviations

ASN.1	Abstract Syntax Notation One
CMIS	Common management information service
CMISE	Common management information service element
Id	identifier
MAPDU	management application protocol data unit
PDU	Protocol data unit
SMAE	systems management application entity
SMFU	systems management functional unit
SMI	structure of management information

5 Conventions

This Recommendation | International Standard uses some of the descriptive conventions in the OSI Service Conventions in ISO/IEC TR 8509.

6 Requirements

For the purpose of many management functions it is necessary to be able to preserve information about events that may have occurred or operations that may have been performed by or on various objects. In a real open system various resources may be allocated to store such information. In OSI management these resources are modeled by **logs** and **log records** contained in the logs.

The management needs for the type of information that is to be logged may change from time to time. Furthermore, when such information is retrieved from a log the manager must be able to determine whether any records were lost or whether the characteristics of the records stored in the log where modified at any time.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

The above needs give rise to the following requirements to be satisfied:

a) the definition of a flexible log control service which will allow selection of records that are to be logged by a management system in a particular log;

b) the ability for an external system to modify the criteria used in logging records;

c) the ability for an external system to determine whether the logging characteristics were modified or whether log records have been lost;

d) specification of a mechanism to control the time during which logging occurs, for example, by suspending and resuming logging;

e) the ability for an external system to retrieve and delete log records;

f) the ability for an external system to create and delete logs.

7 Model for the log control function

7.1 Introduction

The model for the log control function describes the conceptual components that provide for the logging of information in open systems. The model also describes the messages for the control of these components. Figure 1 is a schematic description of the logging capability of a system.

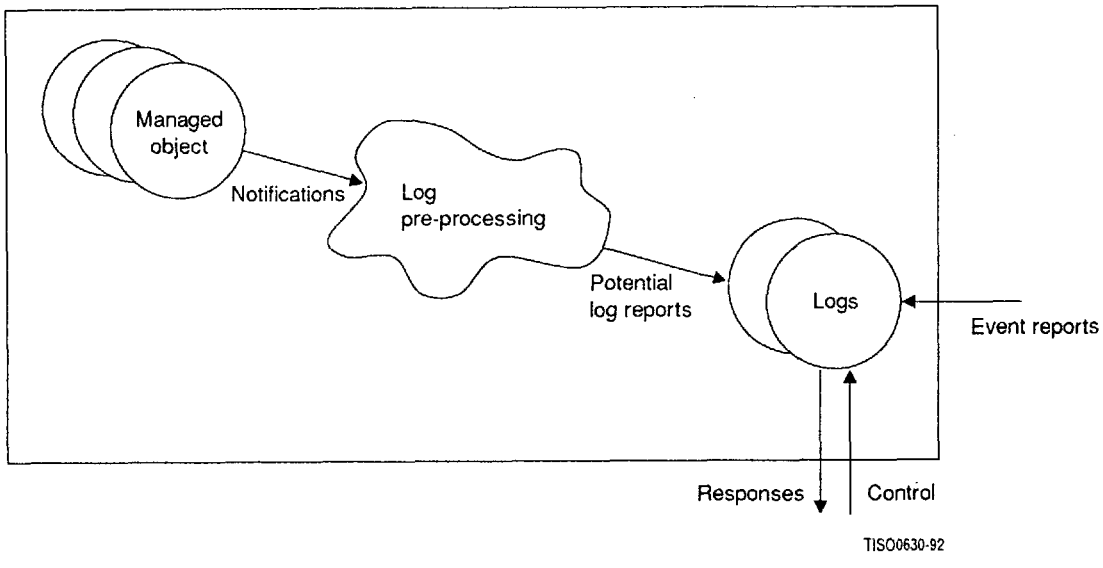


Figure 1 – Log management model

Conceptually, logs store incoming event reports and local system notifications. However, logs can be used to store information that is derived from notifications in the local open system, incoming event reports and PDUs received or transmitted by the open system. These three sources of information are modelled in two basic ways, so that conceptually the log only deals with event reports and local system notifications.

– The conceptual log preprocessing function receives notifications from managed objects within the local system and forms potential log records. Conceptually these potential log records are distributed to all logs that are contained within the local open system. A potential log record is perceived as a discriminator input object for the purpose of discrimination by the log only and is not visible outside the local system.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

PDUs (other than systems management event reports) that are to be logged are modelled as giving rise to local system notifications that are processed as described above. The resource generating these PDUs must, therefore, be represented by a managed object. This results in treating PDUs exactly like local system notifications.

NOTE – It is the responsibility of the particular layer groups in defining managed objects that represent protocol entities to define which PDUs generate notifications and the parameters to be associated with that notification. In particular it is viewed that systems management application PDUs will give rise to notifications that may have to be logged.

To allow the logging of incoming PDUs in the log it is necessary to define a subclass of the log record managed object class that can contain the internal notifications and associated parameters.

- Systems management event reports, on the other hand, are not modelled as giving rise to notifications, but are presented directly to be processed for logging.

  Incoming event reports are conceptually distributed to all logs within the receiving open system.

The log in addition to conceptually storing the logged information determines which information is to be logged. Each log contains a discriminator construct which specifies the characteristics a potential log record or received event report must have in order to be selected for logging. Information that is selected for logging is supplemented with additional information generated as a part of the logging process (e.g. record identifiers and logging time). Each record has an identifier attribute value assigned on record creation. Values are assigned locally in ascending sequential order. The identifier attribute can, therefore, be used to determine the order of record creation in the log.

7.2 The log model

The log is a repository for **records**, and is the OSI abstraction of logging resources in real open systems. Records contain information that is logged.

The log managed object class is characterised by a mandatory package and several conditional packages; these packages provide the log with the following capabilities:

- the mandatory log package

  This package is characterised by the following:

  - **a log identifier,** uniquely identifying an instance of a log relative to its superior managed object;
  - an **Administrative state** and an **Operational state**, representing the state of the log;
  - a description of the type of information to be logged, this property is supported by the discriminator construct attribute;
  - the behaviour of the log when its maximum capacity is reached. This property is supported by the log full action attribute;
  - notifications generated when the log is created, deleted, suspended, resumed and modified. This property is supported by the object creation, object deletion, state change and attribute value change notifications of CCITT Rec. X.730 | ISO/IEC 10164-1 and CCITT Rec. X.731 | ISO/IEC 10164-2.

- the finite log size conditional package

  This package is characterised by the following:

  - a maximum log size (which may be indeterminate), this property is supported by the maximum log size attribute;
  - the current log size, supported by the current log size attribute;
  - the number of records currently in the log. Together with the current log size, this may be used to obtain an estimate of the average record size and, therefore, of the number of records that can still be logged. This property is supported by the number of records attribute.

- the scheduling conditional packages

  The log control function uses several conditional packages that provide various levels of sophistication in scheduling the activity of the log. These packages are characterised by the following:

  - the time during which logging is active, this property is supported by time-related attributes in the conditional packages that contain information related to scheduling.

- the log alarm conditional package

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

This package is characterised by the following:

– capacity alarm thresholds defined as percentages of the maximum log size. The capacity alarm thresholds are used to generate events that will indicate that various levels of the log full condition have been approached. This property is supported by the capacity alarm threshold attribute.

8 Generic definitions

This Recommendation | International Standard provides generic definitions of managed objects, attributes, and notifications associated with the log and log record managed objects.

8.1 Managed objects

8.1.1 The log managed object

8.1.1.1 Mandatory log package

The following mandatory attributes are defined for the log class.

8.1.1.1.1 Log Id

This attribute is used to uniquely identify the instance of a log.

8.1.1.1.2 Discriminator construct

This attribute specifies tests on the information that is to be logged. The discriminator construct may operate on any of the parameters of the information to be logged.

8.1.1.1.3 Administrative state

This attribute represents the administrative capability of the log to perform its function. The following Administrative states are defined:

a) **Unlocked** – Use of the log has been permitted by a managing system. Information from subordinate records may be retrieved and, conditional on the values of other state and status attributes, new records may be created;

b) **Locked** – Use of the log has been prohibited by a managing system. Information from subordinate records may be retrieved but new records shall not be created. Records may be deleted.

8.1.1.1.4 Operational state

This attribute represents the operational capability of the log to perform its function. The following Operational states are defined:

a) **Enabled** – The log is operational and is ready for use. Information from subordinate records may be retrieved and, conditional on the values of other state and status attributes, new records may be created;

b) **Disabled** – The log is not available for use. New records cannot be created.

8.1.1.1.5 Log full action

This attribute specifies the action to be taken when the maximum size of the log has been reached. Options are

a) **wrap** – The oldest records in the log, as determined by the log record identifier, will be deleted to free resources for the creation of new records;

b) **halt** – No more records will be logged. Records already in the log will be retained.

Both options shall be supported by any log.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

8.1.1.1.6 Availability status

This attribute reflects the availability status of the managed object. The attribute may indicate a "log-full" condition; indicating that records can be retrieved but that no new records can be added.

8.1.1.2 Finite log size package

This package provides additional information regarding the current status of finite sized logs. It shall be present whenever supported by the underlying resource.

8.1.1.2.1 Max log size

This attribute specifies the size of the log measured in number of octets. A log may have an indeterminate size. A max log size of zero shall be used to specify that the log size has no predefined limit.

NOTE – Since the log size is specified in octets the actual amount of information that is contained in a log will be determined by data representation used in the log. This data representation is not subject to standardization. The maximum log size does not include the system overhead involved in establishing the log. Thus, immediately after creation the current log size should read zero.

8.1.1.2.2 Current log size

This attribute specifies the current size of the log measured in octets.

8.1.1.2.3 Number of records

This attribute specifies the current number of records contained in the log.

8.1.1.3 Log alarm package

This package provides for transmission of alarms when a log full condition approaches. This package shall be present whenever a log is of finite size and halts logging when the log full availability status occurs. This package contains the following attribute:

Capacity alarm threshold

This attribute specifies, as a percentage of max log size, the points at which an event will be generated to indicate that a log full or log wrap condition is approaching. This attribute is set-valued. Support of this attribute is mandatory for the halt behaviour. When a log is created with the **wrap** option the capacity threshold events are triggered as if coupled to a gauge that counts from zero to the highest capacity threshold value defined and then resets to zero.

8.1.1.4 Scheduling packages

Scheduling packages provide logs with the ability to automatically switch between their On-Duty and Off-Duty conditions.

To accommodate various levels of complexity in scheduling logging activity periods, conditional packages that are related to scheduling are defined for logging.

8.1.1.4.1 Availability status package

This conditional package shall be present if any of the other scheduling related packages are instantiated. This package contains the following attribute:

availability status

This attribute reflects the availability status of the managed object. When the resource has been made unavailable in accordance with a predetermined time schedule its value will be "Off-Duty". The attribute is read-only. The value on creation is determined by the scheduling parameters specified and the status of the resource. The required value set for this attribute in this package is "Off-Duty".

No state change notification is generated when this attribute changes value.

NOTE – The log makes use of the availability status to indicate the log-full condition; the presence of this conditional package makes available the "Off-Duty" value to the object.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

8.1.1.4.2 Duration package

The duration package provides the ability to automatically control the time that a managed object starts and stops functioning through the use of the start time and stop time attributes.

a) Start time

This attribute defines the date and time at which an unlocked and enabled managed object starts functioning. If the value of the Start time attribute is not specified in the create request, its value defaults to the time of creation of the managed object and thus causing it to function immediately.

A change in the start time attribute results in an attribute change notification.

b) Stop time

This attribute defines the date and time at which a managed object stops functioning. If the value of the Stop time attribute is not specified in the create request, its value defaults to "continuous operation". Continuous operation is represented by a null value for the stop time.

A change in the stop time attribute results in an attribute change notification.

8.1.1.4.3 Daily scheduling package

The daily scheduling conditional package provides the capability of scheduling logging with a periodicity of 24 hours.

The scheduling attributes and their associated defaults, are defined below.

intervals of day

This attribute defines the list of time intervals (interval-start and interval-end times of day) for which the logs will exhibit the logging-on condition. During excluded intervals the log exhibits the logging-off condition. If not specified in the create request, the value of this component defaults to a single interval encompassing the entire 24 h period of a day.

8.1.1.4.4 Weekly scheduling package

The weekly scheduling conditional package provides the capability of scheduling logging with a periodicity of one week.

The scheduling attributes and their associated defaults, are defined below.

week mask

This structured attribute defines a set of mask components, each specifying a set of time intervals on a 24-hour time-of-day clock, pertaining to selected days of the week. The week mask attribute defaults to a scheduling criteria of "always on" at logs creation. The components of each mask are defined below.

a) Days of week

This component defines the days of the week on which the log's scheduling mechanism will allow the log to have intervals during which logging may occur. This component, if not present in a create, will default to all seven days of the week.

b) Intervals of day

This component defines the list of time intervals (interval-start and interval-end times of day) for which the log will exhibit the logging-on condition, if the current day is one of the days that is selected within the corresponding Days Of Week. During excluded intervals the log exhibits the logging-off condition. If not specified in the create request, the value of this component defaults to a single interval encompassing the entire 24 h period of a day.

8.1.1.4.5 External scheduler scheduling package

The external schedular scheduling conditional package provides the capability of scheduling logging based on a schedule defined in an external schedular managed object. The logs' logging-on and logging-off conditions will be changed in accordance with the scheduling characteristics specified by a schedular managed object.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

The scheduling attribute is defined below

scheduler name

This attribute specifies the name of the scheduler managed object that is related to the logs. This relationship implies that the log's logging-on and logging-off conditions will be scheduled by the external scheduler. This attribute is read-only.

8.1.1.5 Normal operation of logs

The log's behaviour is determined by its state attributes, availability status, its discriminator construct, finite log size package, availability status package, log alarm package and its scheduling packages, if any.

The behaviour of a particular instance of the log is influenced by the conditional packages that were instantiates at the time it was created. The text below describes the way in which the log behaves when various conditional packages have been instantiated.

Whether or not a particular record is logged depends on the following characteristics of the log:

- the operational state;
- the availability status;
- the administrative state;
- the scheduling packages, if any; and
- the discriminator construct.

New log records will only be created, if the discriminator input object satisfies the conditions specified in the discriminator construct of the log and if the log is in the unlocked administrative state, is not in the disabled operational state, and has neither the log-full (for a log that halts), nor the off duty availability status. The off-duty availability status will only be supported by the log if one of the scheduling packages and the associated availability status package have been instantiated.

The administrative state of the log affects the creation of new records. When the log is in the "locked" state the log will not create new records however, records contained in the log are available for retrieval. When the log is in the "unlocked" state new records can be created unless the log is in the "disabled" operational state. Since log records are contained in logs, the operational state of the log affects operations that can be performed on log records. When the operational state of the log is disabled, records can not be retrieved.

Additionally, if the log is instantiated with a conditional scheduling package, the log will not create any new records if the log has the off-duty availability status.

The operational state of the log and the availability status cannot be changed by direct management action, but reflect the internal activity of the log and its scheduling packages, if any.

For the behaviour of the log when the maximum log size has been reached (known as the **log full** availability status) two options have been defined. The log may either **halt** logging or the log may **wrap**. A log that halts upon reaching the log full condition will always generate a capacity alarm threshold notification that indicates that this condition has been reached, and shall therefore, include the log alarm package. The behaviour of such a log corresponds to a log that discards the most recent information in preference to older information.

A log that wraps upon reaching the log full condition will discard an integral number of records when it reaches that condition in order to log new records. The behaviour of such a log corresponds to a log that discards old information in preference to new information.

8.1.1.6 Management of logs

In general, all non-status attribute values may be modified, though restrictions may exist. For example, the max log size attribute may not be modified to a value less than the value of the Current log size attribute. Additionally, in some systems, attempts to increase or decrease the value of the max log size attribute after creation may fail. The Log Id attribute value is not settable.

The values of the availability status, Operational state, current log size, and number of records, reflect the operation of the log and may not be modified directly by the manager.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

Whenever a settable non-state attribute is modified an attribute change notification may be generated. All log attributes except the number of records and current log size attributes shall generate such notifications. The latter attribute changes are not coupled to a notification since they are expected to change frequently in response to normal operation of the log.

The log administrative state may be changed by use of a set operation. Whenever the administrative state of a log is changed a state change notification is generated. A change in operational state shall generate a state change notification.

8.1.2 Log records

Log records are managed objects that represent information stored in logs. The log record managed object class serves as a superclass for other record classes. As a part of the specialisation of the log record class additional attributes may be assigned to the new subclass.

The log record class has the following properties:

- **a log record identifier;**
- **a logging time.**

8.1.2.1 Log record behaviour

Log records are created as a result of the receipt of an event report or notifications, they are not created by explicit management operations. Log records may only be retrieved and deleted; attributes of a log record cannot be modified.

The operations that can be performed on a log record depend on the state of the log in which the records are contained and may also be subject to security constraints.

8.1.2.2 Log record attributes

The following mandatory attributes are defined for the log record class:

8.1.2.2.1 Log record Id

This attribute uniquely identifies each record in the log. The log record identifier is a number that is unique within the scope of the log and is assigned sequentially. The identification number used may wrap; however, at no time shall there be more than one record with the same identifier in the log. The logRecordId has the syntax of an integer.

8.1.2.2.2 Logging time

This attribute identifies the time at which the record was entered into the log. In the absence of time synchronization this time may be greater or less than the source time (if specified).

8.2 Imported generic definitions

This Recommendation | International Standard makes use of the following generic definitions in CCITT Rec. X.730 | ISO/IEC 10164-1, CCITT Rec. X.731 | ISO/IEC 10164-2 and CCITT Rec. X.733 | ISO/IEC 10164-4.

- attribute value change notification;
- state change notification;
- processing error alarm notification;
- object creation notification;
- object deletion notification.

The attribute value change notification and the state change notification are used to report changes in the non-state attribute values and states of the log, respectively.

The log also generates events indicating that a capacity threshold has been reached or exceeded. For a log that is configured to halt upon reaching a log-full condition an event indicating that this condition has occurred (i.e. a current log size of 100% has been reached) shall always be generated. For a log that is configured to halt, the event indicating a log-full condition shall be generated at latest when the first new record had to be discarded because of a lack of storage capacity. The event may be generated before this if it is known that there are insufficient resources to create additional records. For a log that is configured to wrap, all capacity threshold alarms are optional.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

In reporting the capacity threshold event, use is made of the alarm report defined in CCITT Rec. X.733 | ISO/IEC 10164-4. Only the following parameters of the alarm report shall be used and all parameters are mandatory when used for reporting log capacity threshold alarms.

Managed Object Class	This parameter shall identify the log class.
Managed Object Instance	This parameter shall identify the instance of the log that generated the event.
Alarm Type	This parameter shall indicate that a **processing error alarm** has occurred.
Event Time	This parameter carries the time at which the capacity threshold event occurred.
Perceived Severity	This parameter will indicate the severity assigned to the capacity threshold event. When the 100% log full condition is reached a severity value of critical shall be assigned to this event.
Monitored Attributes	This parameter shall carry the maximum log size attribute of the log.
Probable Cause	This parameter shall carry the value **storage capacity problem**.
Threshold Info	This parameter shall carry the capacity threshold value (as percentage of total capacity) that was reached or exceeded in generating this event.

9 Service definition

This Recommendation | International Standard does not define any services. The use of services defined in other functions is described below.

9.1 Introduction

The information needs and management control requirements between systems may change with time and changes in the management or communications environment. It is, therefore, necessary to provide a mechanism for administering OSI management services.

It is considered that a manager should have the capability of modifying the operation of a log in a remote system. In particular, the operations required, that can be applied to each instance of a log, are

- creation of a log;
- deletion of a log;
- modification of log attributes;
- suspension of the activity of the log;
- deletion and retrieval of log records; and
- resumption of the log activity.

These operations will thus provide a means for a system to initiate, terminate, suspend, resume and modify the logging capability.

9.2 Initiation of logging

The PT-CREATE service defined in CCITT Rec.X.730 | ISO/IEC 10164-1 is used to allow one open system to request that another open system create a log, thereby requesting that new or additional logs be defined.

The semantics of the log attributes are defined in 7.1.2. The following describes the values that will be assigned to log attributes in response to a PT-CREATE request and the required response.

Max log size: This attribute specifies the size of the log to be created. When this attribute is absent then either a log of indeterminate size is created or a system defined default size may be assigned. When this parameter is absent in the indication it shall be returned in the response.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

Capacity alarm threshold: This attribute specifies capacity levels at which an alarm notification will be generated. For a log that has a log full action of "halt", this attribute is mandatory and if not specified a single threshold set at 100% will be assumed.

Log full action: This attribute specifies the action to be taken when the maximum capacity of the log is reached. If this parameter is not specified "wrap" is assumed.

Discriminator construct: This attribute specifies the test conditions which will be used by the log in testing potential log records. If no value is specified for this parameter in the incoming request then an empty discriminator construct will be defined.

Administrative state: This attribute specifies the administrative state in which the log is to be created. The log may be created in a Unlocked or Locked state. If no administrative state is specified, the Unlocked state is assumed.

Operational state: This attribute specifies the operational state of the log. The operational state shall not be specified as part of the create request, but shall be returned in the response and will reflect the actual state of the created log.

Availability status: This attribute specifies the availability status of the log. The availability status shall not be specified as part of the create request, but shall be returned in the response and will reflect the actual status of the created log.

Packages: This attribute specifies the conditional packages to be included in the managed object to be created. If no packages are specified, no scheduling is assumed to be requested.

9.3 Termination of logging

The PT-DELETE service defined in CCITT Rec. X.730 | ISO/IEC 10164-1 is used to allow one open system to request that another open system delete one or more logs.

9.4 Modification of logging attributes and suspension and resumption of logging

The PT-SET service defined in CCITT Rec. X.730 | ISO/IEC 10164-1 is used to allow one open system to request that another open system change the administrative state of the log or set the value of a settable attribute. When the state is changed to locked, logging of records will be suspended; when the state is changed to unlocked, logging may be resumed.

9.5 Retrieving logging attributes

The PT-GET service defined in CCITT Rec. X.730 | ISO/IEC 10164-1 may be used to retrieve any of the readable attributes of the log. All attributes of the log are readable.

9.6 Retrieval of log records

Log records may be retrieved from a log by means of the PT-GET service. If a scoped and filtered PT-GET service is used multiple log records can be retrieved with one request.

9.7 Deletion of log records

Log records may be deleted from a log by means of the PT-DELETE service. If a scoped and filtered PT-DELETE service is used, multiple log records can be deleted with one request.

10 Functional units

Two functional units are defined in this Recommendation | International Standard for the management of logs:

a) log control functional unit;

b) monitor log functional unit.

The monitor log functional unit requires the support of PT-GET services for instances of the log and log record or any of their subclasses. The log control functional unit requires the support of PT-GET and PT-DELETE for instances of the log and log record or any of their subclasses, and requires the support of PT-SET, PT-CREATE, object creation reporting, object deletion reporting, attribute value change reporting, state change reporting and the alarm reporting services for instances of the log or any of its subclasses.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

11 Protocol

11.1 Elements of procedure

This Recommendation | International Standard makes use of the elements of procedure defined for the services described in clause 9 of this Recommendation | International Standard. No additional elements of procedure are defined in this Recommendation | International Standard.

11.2 Abstract syntax

11.2.1 Managed objects

This Recommendation | International Standard references the following support objects whose ASN.1 value notation is specified in CCITT Rec. X.721 | ISO/IEC 10165-2.

a) log;

b) logRecord.

11.2.2 Attributes

This Recommendation | International Standard references the following attributes, associated with the objects specified in 11.2.1, whose abstract syntax is defined in CCITT Rec. X.721 | ISO/IEC 10165-2.

a) administrativeState;

b) availabilityStatus;

c) capacityAlarmThreshold;

d) currentLogSize;

e) discriminatorConstruct;

f) intervalsOfDay;

g) logFullAction;

h) logId;

i) logRecordId;

j) loggingTime;

k) maxLogSize;

l) numberOfRecords;

m) operationalState;

n) schedulerName;

o) startTime;

p) stopTime;

q) weekMask.

The objects defined in this Recommendation | International Standard inherit attributes from top, these attributes are not repeated here.

11.2.3 Notifications

This Recommendation | International Standard references the following events defined in CCITT Rec. X.730 | ISO/IEC 10164-1.

a) attribute value change notification;

b) object creation notification;

c) object deletion notification.

This Recommendation | International Standard references the following events defined in CCITT Rec. X.731 | ISO/IEC 10164-2.

d) state change notification.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

This Recommendation | International Standard references the following events defined in CCITT Rec. X.733 | ISO/IEC 10164-4.

e) processing error alarm.

11.3 Negotiation of functional units

This Recommendation | International Standard assigns the following object identifier value:

{joint-iso-ccitt ms(9) function (2) part6(6) functionalUnitPackage(1)}

as a value of the ASN.1 type FunctionalUnitPackageId defined in CCITT Rec. X.701 | ISO/IEC 10040 to use for negotiating the the following functional units

0 log control functional unit

1 monitor log functional unit

where the number identifies the bit positions in the BIT STRING assigned to the functional units, and the names referencing the functional units as defined in clause 10.

Within the Systems management application context, the mechanism for negotiating the functional units is described by CCITT Rec. X.701 | ISO/IEC 10040.

NOTE – The requirement to negotiate functional units is specified by the application context.

12 Relationship with other functions

The log control function uses the services defined in CCITT Rec. X.731 | ISO/IEC 10164-2 for the notification of state changes, the services defined in CCITT Rec. X.730 | ISO/IEC 10164-1 for the creation and deletion of managed objects, the retrieval of attributes and notification of attribute value changes and the services defined in CCITT Rec. X.733 [9] | ISO/IEC 10164-4 for the reporting of log alarms.

The relationship with the event report management function in CCITT Rec. X.734 | ISO/IEC 10164-5 is shown in Figure 2.

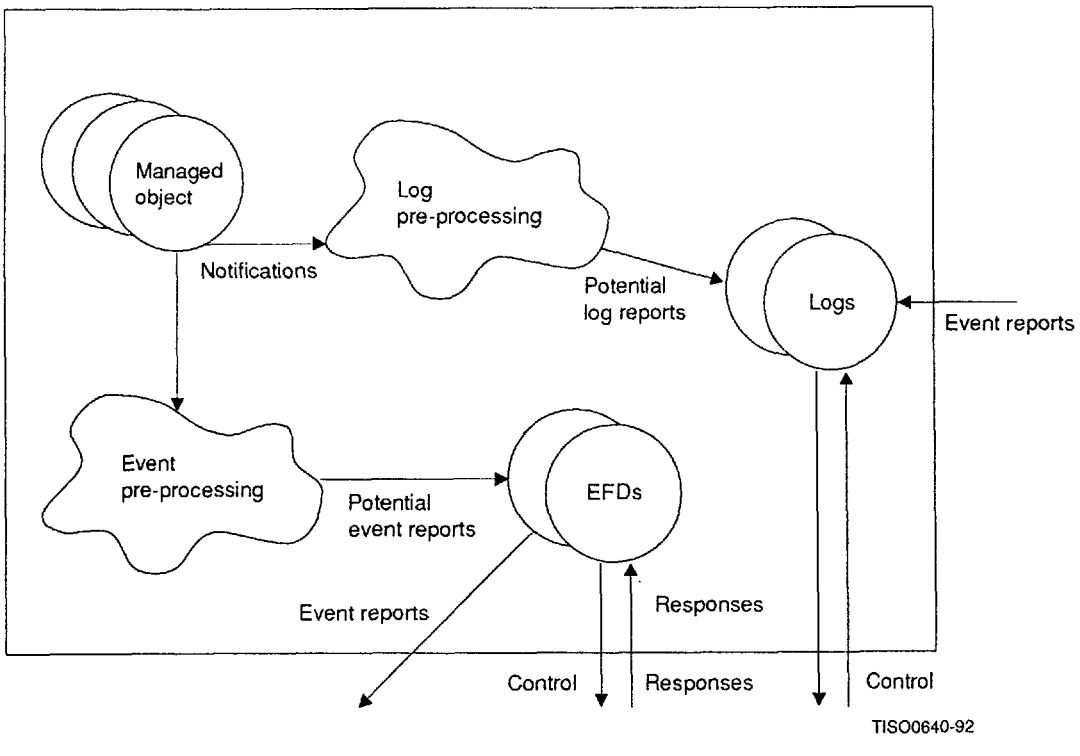


Figure 2 – Relationship between Event report and Log management models

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

13 Conformance

There are two conformance classes: general conformance class and dependent conformance class. A system claiming to implement the elements of procedure for system management services referenced by this Recommendation | International Standard shall comply with the requirements for either the general or the dependent conformance class as defined in the following clauses. The supplier of the implementation shall state the class to which the conformance is claimed.

13.1 General conformance class requirements

A system claiming general conformance shall support this function for all managed object classes that import the management information defined in this Recommendation | International Standard.

NOTE – This is applicable to all subclasses of the management support object classes defined in this Recommendation | International Standard.

13.1.1 Static conformance

The system shall

a) support the role of manager or agent or both, with respect to the log control functional unit;

b) support the transfer syntax derived from the encoding rules specified in CCITT Rec. X.209 | ISO/IEC 8825 and named {joint-iso-ccitt asn1(1) basicEncoding(1)}, for the purpose of generating and interpreting the MAPDUs, defined by the abstract data types referenced in 11.2.2 and 11.2.3 of this Recommendation | International Standard;

c) when acting in the agent role, support one or more instances of the Log managed object class, log record managed object class or any of their subclasses.

13.1.2 Dynamic conformance

The system shall, in the role(s) for which conformance is claimed, support the elements of procedure defined in:

- CCITT Rec. X.730 | ISO/IEC 10164-1 for the PT-GET, PT-CREATE, PT-DELETE, PT-SET, Object creation reporting, Object deletion reporting and Attribute change reporting services;
- CCITT Rec. X.731 | ISO/IEC 10164-2 for the State change reporting service;
- CCITT Rec. X.734 | ISO/IEC 10164-4 for the Alarm reporting service.

13.2 Dependent conformance class requirements

13.2.1 Static conformance

The system shall

a) supply a System conformance statement which identifies the standardized use of this system management function;

b) support the transfer syntax derived from the encoding rules specified in CCITT Rec. X.209 | ISO/IEC 8825 and named {joint-iso-ccitt asn1(1) basicEncoding(1)}, for the purpose of generating and interpreting the MAPDUs, defined by the abstract data types referenced in 11.2.2 and 11.2.3 of this Recommendation | International Standard, as required by a standardized use of this systems management function;

c) support one or more instances of the Log managed object class when acting in the agent role.

13.2.2 Dynamic conformance

The system shall support the elements of procedure referenced by this Recommendation | International Standard, as required by a standardized use of this system management function.

13.3 Conformance to support managed object definitions

The log and log record objects supported by the open system shall comply with the behaviour specified in clause 8 and the syntax specified in CCITT Rec. X.721 | ISO/IEC 10165-2.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Annex A

Considerations for system implementation capabilities statements

(This annex does not form an integral part of this Recommendation | International Standard)

The following is an example of the information the implementor may specify when defining implementation options for this Recommendation | International Standard:

a) the behavioural options implemented for the log managed object class;

b) the range of all attribute values that can be supported by the log managed object class;

c) the supported log discriminator constructs; and

d) the number of values that can be supported for the set-valued capacity alarm threshold attribute.

Annex B

Conditions on attribute values for logging

(This annex does not form an integral part of this Recommendation | International Standard)

Attribute	Conditions for record logging to occur. All conditions in this column shall be satisfied	Conditions for record logging not to occur. If any of these conditions is satisfied logging is inhibited.
Operational State	Enabled	Disabled
Administrative State	Unlocked	Locked
Availability Status (Log Capacity)	Not Log-full	Log-full
Availability Status (Scheduling)	Not off-duty	Off-duty
Discriminator Constrict Test	TRUE	FALSE

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

UDC 681.3:691.39

Descriptors: data processing, information interchange, network interconnection, open systems interconnection, application layer, management.

Price based on 17 pages

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Not for Resale