

ANSI Z535.1-2002
Revision of
ANSI Z535.1-1998

American National Standard

For Safety Color Code

Secretariat:

National Electrical Manufacturers Association

Approved July 25, 2002

American National Standards Institute, Inc.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

NOTICE AND DISCLAIMER

The information in this publication was considered technically sound by the consensus of persons engaged in the development and approval of the document at the time it was developed. Consensus does not necessarily mean that there is unanimous agreement among every person participating in the development of this document.

NEMA standards and guideline publications, of which the document contained herein is one, are developed through a voluntary consensus standards development process. This process brings together volunteers and/or seeks out the views of persons who have an interest in the topic covered by this publication. While NEMA administers the process and establishes rules to promote fairness in the development of consensus, it does not write the document and it does not independently test, evaluate, or verify the accuracy or completeness of any information or the soundness of any judgments contained in its standards and guideline publications.

NEMA disclaims liability for any personal injury, property, or other damages of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, application, or reliance on this document. NEMA disclaims and makes no guaranty or warranty, express or implied, as to the accuracy or completeness of any information published herein, and disclaims and makes no warranty that the information in this document will fulfill any of your particular purposes or needs. NEMA does not undertake to guarantee the performance of any individual manufacturer or seller's products or services by virtue of this standard or guide.

In publishing and making this document available, NEMA is not undertaking to render professional or other services for or on behalf of any person or entity, nor is NEMA undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances. Information and other standards on the topic covered by this publication may be available from other sources, which the user may wish to consult for additional views or information not covered by this publication.

NEMA has no power, nor does it undertake to police or enforce compliance with the contents of this document. NEMA does not certify, test, or inspect products, designs, or installations for safety or health purposes. Any certification or other statement of compliance with any health or safety–related information in this document shall not be attributable to NEMA and is solely the responsibility of the certifier or maker of the statement.

--`,,`-`-`,,`,,`,`,,`---

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS

Not for Resale

AMERICAN NATIONAL STANDARD

Approval of an American National Standard requires verification by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by the standards developer.

Consensus is established when, in the judgment of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the standards or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

Caution Notice: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken periodically to reaffirm, revise, or withdraw this standard. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

Published by

National Electrical Manufacturers Association
1300 North 17th Street, Rosslyn, VA 22209

© Copyright 2002 by National Electrical Manufacturers Association
All rights reserved including translation into other languages, reserved under the Universal Copyright Convention, the Berne Convention for the Protection of Literary and Artistic Works, and the International and Pan American Copyright Conventions.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Printed in the United States of America

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

This page intentionally left blank.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Contents

Page

Foreword v

1 Introduction 1

2 Scope 1

3 Purpose 1

3.1 Intent 1

3.2 Engineering or administrative controls 2

3.3 Existing American national standards 2

4 Application 2

4.1 Colors specified 2

4.2 Specifications for safety colors 2

4.3 Illumination 2

4.4 Optimum visibility 2

5 Exceptions 2

6 Color specifications and test methods for ordinary surface colors 2

6.1 Color specifications 2

6.2 Visual test method 3

6.3 Instrumental test method 3

7 Color specifications and test methods for retroreflective materials 4

7.1 General 4

7.2 Visual 4

7.3 Instrumental 4

8 Color specifications and instrumental test methods for fluorescent materials 4

8.1 General 4

8.2 Compliance tests 4

8.3 Fundamental specifications of fluorescent safety colors 5

9 References 5

--`,,`-`-`,,`,,`,`,,`---

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS

Not for Resale

Page

Tables

1 Specifications of the safety colors for CIE Illuminant C and the CIE 1931 2º Standard Observer....7

2 Equations of the boundary lines for the specified chromaticity regions of fluorescent safety colors illuminated by a source equivalent to CIE D_{65} measured using 15). 0º geometry, and expressed in the CIE 1931 system....10

3 Chromaticity coordinates of the corners of the recommended regions of fluorescent safety colors illuminated by a source equivalent to CIE D65, measured using 15). 0º geometry, and expressed in the CIE 1931 system. 10

3 Minimum permissible values of luminance factors and/or spectral (total) radiance factors, within the indicated wavelength range, of fluorescent safety colors illuminated by a source equivalent to CIE D_{65} and measured using 45º/0º geometry.....11

Figures

1 CIE 1931 chromaticity diagram showing the areas representing the ANSI Z535.1 Safety Color Code....12

2 Enlarged view of the CIE 1931 chromatically diagram showing the areas representing the ANSI Z535.1 Safety Color Code for white, grey, and black 13

3 CIE 1931 chromaticity diagram showing the areas representing fluorescent safety color illuminated by a source equivalent to CIE D_{65} and measured using 45º/0º geometry....14

Annexes

A Understanding and using the color specifications set forth in the ANSI Z535.1 Safety Color Code....15

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Foreword (This Foreword is not part of American National Standard for Safety Color Code, Z535.1-2002.)

This standard, approved by ANSI on July 25, 2002, is a revision of the ANSI Z535.1-1998 Safety Color Code.

In 1979, the Z53 Committee on Safety Colors was combined with the Z35 Committee on Safety Signs to form the Z535 committee on Safety Signs and Colors. This committee has the following scope:

"To develop standards for the design, application, and use of signs, colors, and symbols intended to identify and warn against specific hazards and for other accident prevention purposes."

Five subcommittees were created at this time and assigned the tasks of updating the Z53 and Z35 standards, and writing two new standards. The five standards are:

Z535.1 – Safety Color Code, which updates Z53.1 (1979).

Z535.2 – Environmental and Facility Safety Signs, which updates Z35.1 (1972).

Z535.3 – Criteria for Safety Symbols and Labels, a new standard.

Z535.4 – Product Safety Signs and Labels, a new standard.

Z535.5 – Safety Tags and Barricade Tapes (for Temporary Hazards), which updates Z35.2 (1974)

Together, these five standards contain the information needed to specify formats, colors, and symbols for safety signs used in environmental and facility applications (Z535.2), product applications (Z535.4), and temporary accident prevention tags (Z535.5).

It is desirable that new safety signs, labels, symbols and colors comply with these standards.

This Safety Color Code Standard is the seventh revision of the American War Standard, developed at the request of the War Department and approved by the American Standards Association (ASA) on July 16, 1945. The ASA was reconstituted as the USA Standards Institute (USASI) in August 1966, and as the American National Standards Institute (ANSI) in October 1969. Peacetime work on revising the American War Standard containing the Safety Color Code began in 1946 under committee procedures of the ASA, with the National Safety Council serving as sponsor of the project. The Sectional Committee on the Safety Color Code, Z53, reviewed the War Standard and enlarged its application to include the colors orange, blue, and purple. The committee also approved standard definitions and limits for the colors. The revised standard was approved by the ASA on September 11, 1953. In the 1971 revision, the Z53 committee deleted the color blue and modified the application of the color yellow, due to conflicts with other American National Standards.

In the fourth revision, a significant step forward was made toward increased safety through uniformity in safety color coding. The safety color codes formerly used in this standard were combined and adjusted to give the best feasible discrimination for observers with either normal or color-deficient (colorblind) vision. For the first time, safety color tolerance charts were available for use with this standard (see reference 17). Each color tolerance chart shows the standard color and six color tolerances illustrating acceptable ranges in hue, value (lightness) and chroma (saturation). Each color tolerance chart also lists the Munsell notation and equivalent CIE specifications (x, y, Y) for each standard color and tolerance sample. The colors brown, blue, and gray were added, and Table 1 was expanded to include the same information on most of the levels of the Universal Color Language (UCL) for the tolerance samples as for the standard or central sample of each Safety Color. Sections 1-6 of the present standard contain material similar to the fourth revision (Z53.1, 1979).

--`,,`-`-`,,`,,`,`,,`---

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS

Not for Resale

The intent of the fifth revision (1991) of the safety color standard was to provide a series of visually distinguishable safety colors, each with specific uses. The sixth revision 1998 incorporated corrections and additions that helped to clarify the use of the standard in conjunction with the other Z535 standards. Annex A was also added at this time to explain how to relate the CIE safety color specifications contained in Table 1 with the CIE chromaticity diagrams illustrated in Figures 1,2, and 3.

This, the seventh revision of the ANSI Z535.1 Safety Color Code, has two major changes. The first is the deletion of information concerning the application of the safety colors. The intention in making this change was to maintain Z535.1 as the standard that defines the safety colors in terms of their color tolerances. The *application* of the colors (i.e. how they are to be used) properly belongs to the other standards in the ANSI Z535 series as well as to other standards that include uses for safety colors. The second change was to include the "closest PANTONE® color" number for all of the safety colors on the Safety Color Chart that did not have a PANTONE® color reference. This was a practical addition that makes it easier for those needing to specify a safety color using the PANTONE® color matching system.

It is important to note that the color-rendering characteristics of several types of modern, high-efficiency light sources differ markedly from those of the average daylight source (CIE Source C) specified in Table 1. It is therefore essential that candidate safety colors be examined under the actual light sources to be used in order to ensure that they can be suitably differentiated and individually identified with their assigned color names.

The limited color gamut and aging characteristics of fluorescent colorants combine to restrict the number and chromaticities of fluorescent safety colors. For this reason, categories of unrestricted red-orange and unrestricted yellow fluorescent colors were added in 1998 to supplement the restricted specifications that are equivalent to CIE international standards. The unrestricted specifications may be used when no more than three distinguishable fluorescent safety colors are required for outdoor use for up to two years.

Recent research is providing conclusive evidence that highly chromatic colors, in some chromaticities, serve to increase or decrease the perception of lightness (for reflective materials) and brightness (for self-luminous objects). The effect is more dramatic in the case of colored lights and colored retroreflective materials. Future revisions of this standard might consider opportunities for improving the visibility of safety signs, colors, and symbols through the selective use of vividly colored retroreflectors as well as include test methods and color specifications for retroreflective and self-luminous materials.

Suggestions for improvement of this standard are welcome. They should be sent to the American National Standards Institute, 11 W. 42nd Street, New York, New York 10036.

This standard was processed and approved for submittal to ANSI by the American National Standards Committee on Safety Signs and Colors, Z535. Committee approval of this standard does not necessarily imply that all committee members voted for its approval, but that a consensus of all members was obtained.

At the time it approved this standard, the Z535 Committee had the following members:

Gary M. Bell, Chairperson

Richard Olesen, Vice Chair

Carin Bernstiel, Secretary

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS Not for Resale

Organization Represented:	*Name of Representative:*
Alliance of American Insurers	Stephen Young
Am. Society of Safety Engineers	J. Paul Frantz Thomas F. Breshnahan (Alt.) Howard A. Elwell (Alt.)
American Welding Society	August F. Manz
Assoc. for Manufacturing Technology	David Felinski
Association of Equipment Manufacturers	Richard A. Dressler Bernie McGrew (Alt.)
Brady U.S.A., Inc.	Susan Larson Tom Dragotta (Alt.) Robin Kressin (Alt.)
Dorris & Associates, Inc.	Alan Dorris Nathan T. Dorris (Alt.)
Edison Electric Institute	David C. Young Janet Fox (Alt.)
Hale Color Consultants	William N. Hale
Hazard Communication Systems, Inc.	Geoffrey Peckham

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Human Factors & Ergonomics Society	Michael S. Wogalter
	Kenneth R. Laughery (Alt.)
Human Factors & Safety Analytics, Inc.	Jay Martin
Industrial Safety Equip. Assoc.	Linda Moquet
	Richard Fisk (Alt.)
	Russel Goldman II (Alt.)
Industrial Services Group	Will M. Garth
	James Moore (Alt.)
Institute of Electrical & Electronics Engineers	Al Clapp
	Sue Vogel (Alt.)
International Staple, Nail, and Tool Assoc.	John Kurtz
Inter-Society Color Council	Norbert L. Johnson
L. Dale Baker & Associates	L. Dale Baker
Lab Safety Supply, Inc.	Jim Versweyveld
Marhefka & Associates	Russell E. Marhefka
National Electrical Mfrs. Assoc.	James F. McElwee
National Spa & Pool Institute	Carvin DiGiovanni
National Spray Equipment Mfrs. Assoc.	Don R. Scarbrough

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Nuclear Suppliers Assoc.	Blair Brewster
Pfizer, Inc	Charles Geraci
Power Tool Institute	George Whelchel Charles M. Stockinger (Alt.)
Rural Utilities Service	Trung Hiu
Safety Behavior Analysis, Inc.	Shelley Waters Deppa
Sauder Woodworking	Gary Bell
Scaffold Industry Assoc.	Dave Merrifield
Society of Environmental Graphic Designers	Tonya Smith-Jackson
Society of the Plastics Industry, Machinery Div.	Loren Mills Walter Bishop (Alt.) Drew Winsted (Alt.)
Standard Register Corporation	Amy Martin Pat Konkol (Alt.)
System Safety Society	Robert Cunitz
World Kitchen, Inc.	William P. Whitney

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Underwriters Laboratories	Richard Olesen
3M Company	David Burns

Subcommittee Z535.1 on Environmental and Facility Safety Signs, which developed the 2002 standard, had the following members:

G. Peckham, Chairperson
C. Bernstiel, Secretary

N. Hale
N. L. Johnson
B. McGrew
L. Moquet

The draft revision of this publication was based on Z535 committee deliberations, Z535 letter ballots and the American National Standards public comment process.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

AMERICAN NATIONAL STANDARD **ANSI Z535.1-2002**

For Safety Color Code—

1 Introduction

Color codes used on safety signs, labels, and tags, as well as for the identification and location of fire extinguishers, first aid kits, traffic aisleways, stumbling and tripping hazards, etc., have been developed in the past by a large number of industrial firms and other organizations.

Although these color codes give satisfaction to those using them, they suffer from lack of uniformity. As a result, spontaneity of action in times of emergency can be lost, particularly by employees who have moved from one plant to another, when each has a different system.

This standard sets forth the specifications and test methods for safety colors in order to establish uniformity of safety color coding. As a result, the safety colors are the same as those used with:

American National Standard for Environmental and Facility Safety Signs, ANSI Z535.2-2002;
American National Standard for Criteria for Safety Symbols, ANSI Z535.3-2002;
American National Standard for Product Safety Signs and Labels, ANSI Z535.4-2002;
American National Standard for Accident Prevention Tags (for Temporary Hazards), ANSI Z535.5-2002;
American National Standard Scheme for the Identification of Piping Systems, ANSI A13.1 (1985);
American National Standard Radio Frequency Radiation Hazard Warning Symbol, ANSI C95.2 (1982) (R 1999);
The Department of Transportation (DOT) Hazardous Materials Warning Labels and Placards; and the National Highway Traffic Safety Administration (NHTSA, DOT) Ambulance Orange and Ambulance Blue (see References 10 and 11).

It is intended that use of this Safety Color Code will supplement the proper guarding or warning of hazardous conditions. The marking of a physical hazard by a standard color warning should never be accepted as a substitute for the reduction or elimination of the hazard wherever possible.

Too many colors appearing simultaneously in the visual field can be both confusing and fatiguing. Study each location to minimize the number of markings, thereby enhancing the perceptual impact of the markings used. Study each location to minimize the number of markings. Thereby enhancing the perceptual impact of the markings used.

2 Scope

This standard sets forth the technical definitions, color standards, and color tolerances for safety colors.

3 Purpose

3.1 Intent

The intent of this standard is to establish a safety color code that will alert and inform persons to take precautionary action or other appropriate action in the presence of hazards.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS Not for Resale

3.2 Engineering or administrative controls

This standard is not a substitute for engineering or administrative controls, including training, to eliminate identifiable hazards.

3.3 Existing American national standards

There are a number of existing American national standards, which are recognized for particular industries or specific uses. Compliance with these standards may be considered for such particular industries or uses. It is not the intent of this ANSI Z535.1 standard to replace existing standards or regulations, which are uniquely applicable to a specific industry or use. It is the intent to encourage adoption of this standard in subsequent revisions of other standards and regulations.

4 Application

4.1 Colors specified

The colors specified in this standard are intended for use on safety signs and symbols as set forth by other Z535 standards. See Z535.2, Z535.3, Z535.4, and Z535.5.

4.2 Specifications for safety colors

This standard sets forth the specifications of the safety colors for as wide a range of materials as possible to satisfy the many applications for these colors.

4.3 Illumination

Safety signs that are color coded and for which illumination must be provided shall be illuminated to levels which will permit positive identification of the color safety signs and shall be illuminated with a light source which will not overly distort the color and, therefore, the message the color identification conveys.

4.4 Optimum visibility

To ensure optimum visibility, colors selected for safety signs should have maximum color contrast, especially lightness contrast. Likewise, contrast must be achieved between the sign and its visual environment. Thus, dark colors (red, brown, green, blue, and purple) should be used with white letters, while light colors (orange and yellow) are better seen contrasted with black.

5 Exceptions

The authority having jurisdiction may permit variations from this standard only when equal or greater safety is provided.

6 Color specifications and test methods for ordinary surface colors

6.1 Color specifications

6.1.1 Primary color specifications

The primary color specifications are in terms of the Munsell Notation System, a color identification and specification system based on uniform visual spacing as described in Standard Practice for Specifying Color by the Munsell System, ASTM D1535 (reference 16). Table 1 lists the Munsell notations for each standard and its surrounding tolerance limits, and provides equivalent data in the CIE 1931 system for use in section 7.3.

6.1.2 Color tolerance charts

The Color Tolerance Charts designed for use with this standard (see section 7.2.1 and reference 17) display the standard color and three pairs of tolerance colors, representing the upper (+) and lower (-)

--`,,`-`-`,,`,,`,`,,`---

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

limits for the visual attributes of hue, value and chroma. Table 1 shows the Munsell notations for each of these seven colors and the equivalent CIE x,y,Y data, for CIE Standard Illuminant C and the CIE 1931 2° Standard Observer. Table 1 also gives the boundary equations of permissible areas on the CIE 1931 Chromaticity Diagram and the luminous reflectance of the standard (Y) . Figure 1 shows the CIE 1931 Chromaticity Diagram on which the permissible areas are defined by the boundary equations and the color names and Munsell Notations for each Safety Color.

6.1.3 Safety white

The specification for Safety White (a neutral) is given in Table 1. The intent of the permissible color range specified in Table 1 for Safety White is to permit greater deviation from neutral white in the red to orange to yellow hue range, and lesser deviation in the rest of the hue circle. This deviation is necessary because most white colorants are really off-whites in the red-to-yellow range. Ageing of white also results in shifts in the same direction. Because it is difficult to express this transition between chroma levels with change in hue without listing a large number of data points, users should be guided by the ovoid shown in Figure 2.

6.1.4 Maximum recognition

The colors in this Safety Color Code have been chosen to provide maximum feasible recognition by both normal and color-deficient (specifically red-green confusing) observers.

6.2 Visual test method

The visual specifications and test methods for daytime color are contained in the Hazardous Materials Labels and Placards Color Tolerance Charts adopted by the U.S. Department of Transportation, Research and Special Programs Administration (see reference 17).

6.2.1 Visual reference standards

Testing for compliance shall be by visual examination using visual reference standards annotated with Munsell notations, and appropriate to the color region of interest. Such standards include the Hazardous Materials Labels and Placards Color Tolerance Charts, appropriate colors from the Munsell Book of Color (reference 18), and other color samples whose values have been determined by instrumental measurement and converted to Munsell notation, provided that the restrictions of 76.2.3 are observed. Visual examination shall be conducted in accordance with ASTM D1729 (reference 19), Standard Practice for Visual Examination of Color Differences of Opaque Materials.

6.2.2 Visual test conditions

Testing for compliance by visual examination shall be limited to cases in which the specimens to be tested and the visual reference standards have similar spectral characteristics; that is, the specimens shall not be noticeably metameric to the standards as judged by ASTM D4086 (reference 20), Standard Practice for Visual Evaluation of Metamerism. If these conditions are met, the test for compliance shall be made under actual daylight or any source designated for color matching of appropriate daylight quality, and by any observer having normal color vision.

6.3 Instrumental test method

6.3.1 Instrumental color specification for each color

The instrumental color specification for each color is a set of CIE 1931 chromaticity coordinates, x, y, and luminous reflectance Y, calculated for CIE Standard Illuminant C and the CIE 1931 2° Standard Observer. These data are equivalent to the Munsell notations described in Section 7.1.1. From them are derived boundary equations defining areas in CIE color space (CIE 1931 Chromaticity Diagram) at the luminous reflectance of the standard (Y), as listed in Table 1. The permissible areas appear on Figures 1 and 2.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

6.3.2 Use of spectrophotometers

Testing for compliance can be done through the use of spectrophotometers designed to measure reflecting materials, with the data processed to yield CIE x, y, Y data for Standard Illuminant C and the CIE 1931 2° Standard Observer. The primary standard for reflectance shall be the perfect reflecting diffuser as defined by the CIE. See ASTM E1164 (reference 21) Standard Practice for Obtaining Spectrophotometric Data for Object Color Evaluation; ASTM E308 (reference 22) Standard Method for Computing the Colors of Objects by Using the CIE System; or ASTM D2244 (reference 23), Test Method for Calculation of Color Differences From Instrumentally Measured Color Coordinates.

7 Color specifications and test methods for retroreflective materials

7.1 General

Specifications and test methods are available for a series of seven colors used by the Federal Highway Administration. It is recommended that these specifications and test methods be used because the colors are quite close to Safety Red, Safety Orange, Safety Yellow, Safety Green, and Safety Blue.

7.2 Visual

The visual specifications and test methods for daytime color are contained in the Highway Color Tolerance Charts adopted by the U.S. Department of Transportation, Federal Highway Administration (see reference 17).

7.3 Instrumental

The colorimetric specifications and test methods for daytime color are contained in ASTM D 4956, Standard for Retroreflective Sheeting for Traffic Control, (reference 2).

8 Color specifications and instrumental test methods for fluorescent materials

8.1 General

This section provides specifications for measuring colors of fluorescent specimens as they would be perceived with the specimen illuminated by standard daylight, in terms of CIE tristimulus values and chromaticity coordinates for these conditions calculated in the CIE 1931 system.

8.2 Compliance tests

Test for compliance shall be through the use of spectrophotometers designed to measure fluorescent materials, utilizing 45/0 or 0/45 geometry in which the specimen is directly illuminated by a suitable simulator of CIE Standard Illuminant D_{65}. The data shall be processed to yield the spectral radiance factor (sum of reflected and fluoresced radiation) at the wavelength (to the nearest 10 nm) of maximum radiance factor, and CIE x, y, Y data for Standard Illuminant D_{65} and the 1931 2° Standard Observer. The primary standard for reflectance shall be the perfect reflecting diffuser as defined by the CIE. See ASTM E-991, Standard Practice for Color Measurement of Fluorescent Specimens (reference 24).

Two sets of specifications are provided: Those designated “restricted” are identical with the current CIE specifications for fluorescent colors for visual signaling (reference 25); they should be used when the primary consideration is the differentiation among the three fluorescent colors red, orange, and yellow, use together in a single system. The specifications designated “unrestricted” should be used when the primary consideration is the differentiation between only yellow and red-orange fluorescent colors, but it is required that these colors remain distinguishable for long periods of time (reference 26). There is only one specification for the color green.

--`,,`,,`-`-`,,`,,`,`,,`---

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

8.3 Fundamental specifications of fluorescent safety colors

The fundamental specifications for each fluorescent safety color are given in Table 2 in terms of the equations of the boundary lines on the CIE chromaticity diagram within which the colors will fall both before and after exposure. The chromaticity coordinates of the corners of the chromaticity regions are provided in Table 3, and these regions are shown on the CIE chromaticity diagram in Figure 3. Similar regions are contained in the United States Coast Guard Specifications for fluorescent signal colors for use in long term exposure in a marine environment (reference 26). Minimum values of the spectral (total) radiance factors and luminance factors are given in Table 4.

9 References

Highway Transportation: American National Standard Manual on *Uniform Traffic Control Devices for Streets and Highways. Millennium Edition.* http://mutcd.fhwa.dot.gov/

Standard Specification for Retroreflective Sheeting for Traffic Control. ASTM D 4956- 95 99a

American National Standard *Adjustable Face Vehicle Traffic Control Signal Heads*. ANSI D10. 1-1966 (R1970) (withdrawn)

Railroad Transportation: Standard Code of the Association of American Railroads - Operating Rules, Block Signal Rules, Interlocking Rules

Marine Navigation; United States Coast Guard, COMDTINST M16500.3A, Aids to Navigation – Technical. http://www.usgc.mil/systems/gse/gse2/atonManual.htm

Air Navigation: Federal Aviation Administration - AC 70 7460-1, *Obstruction Marking and Lighting, Federal Standard No. 3.* MIL-C-25050

School Buses: Minimum Standards for School Buses, 1970 Revised Edition. Recommendations of National Conference on School Transportation, NEA Education Center, Washington, D.C., May 4-7, 1970

Other American National Standards in the Z535 series: ANSI Z535.2-2002, *Environmental and Facility Safety Signs*; ANSI Z535.3-2002, *Criteria for Safety Symbols*; ANSI Z535.4-2002; *Product Safety Signs and Labels*; and ANSI Z535.5-2002, *Accident Prevention Tags (for Temporary Hazards)*

American National Standard Scheme for the Identification of Piping Systems. ANSI A13.1-1998

Hazardous Materials Warning Placards and Labels, Title 49, *Code of Federal Regulations*, Parts 100-199

Ambulance Blue and Orange. Federal Specification KKK-A-1822, January 2, 1974

American National Standard *Radio Frequency Radiation Hazard Warning Symbol*. ANSI C95.2-1982 (R 1999)

Uniform Marking of Fire Hydrants. NFPA No. 291-1988

Automotive Fire Apparatus. NFPA No. 1901-1985

American National Standard *Radiation Symbol.* ANSI N2.1 1989

American National Standard Practice of Specifying Color by the Munsell System. ANSI/ASTM D1535-97

Safety Color Tolerance Charts and *Highway Color Tolerance Charts* are available from Hale Color Charts, Inc.,3709 Ocean View Avenue, Los Angeles, CA 90066, Tel. 800-777-1225, nplotnik@attbi.com

Munsell Book of Color. Munsell Laboratory, Macbeth Division, Knollmorgen Instruments Corp., 405 Little Britain Road, New Windsor, NY 12553

Standard Practice for Visual Appraisal of Colors and Color Differences of Diffusely-Illuminated Opaque Materials. ASTM D 1729-96

Standard Practice for Visual Evaluation of Metamerism. ASTM D 4086-92a(97)

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Standard Practice for Obtaining Spectrophotometric Data for Object Color Evaluation. ASTM E 1164-94

Standard Practice for Computing the Colors of Objects by Using the CIE System. ASTM E308-99

Standard Test Method for Calculation of Color Differences from Instrumentally Measured Color Coordinates. ASTM D 2244-93(2000)

Standard Practice for Color Measurement of Fluorescent Specimens. ASTM E 991-98

Fluorescent Colours, in Publication CIE No. 39.2 (TC-1.6) 1983, *Recommendations for Surface Colours for Visual Signalling*. Currently available through the U.S. National Office of the CIE, c/o Mr. Thomas A. Lemons, TLA Lighting Consultants, Inc., 78 Pond Street, Salem, MA 01970

Colored Elastomeric Film, Specification G-ECV-473, March 1992, U.S. Coast Guard Civil Engineering Division. http://www.uscg.mil/systems/gse/gse2/specifications.htm

American National Standard for Hazardous Industrial Chemicals - Precautionary Labeling. ANSI Z129.1-2000

Colors, Federal Standard 595B, July 1994, General Services Administration, 1800 F Street NW, Washington, DC 20405

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Table 1

Specifications of the safety colors for CIE illuminant C (representative of overcast north sky daylight) and the CIE 1931, 2° Standard Observer

Color Names	Standard and Tolerances	Munsell Notation Specifications		Equivalent CIE Data Specifications			Boundary Equations on the CIE 1931 Chromaticity Diagram	
		Hue	Value/Chroma	x	y	Y%		
Safety Red	Standard	7.5R	4.0/14	0.5959	0.3269	12.00	Purple	y=0.4181 - 0.1700x
	Hue +	8.5R	4.0/14	0.6037	0.3389	12.00	White	y=1.1084x - 0.2892
	Hue -	6.5R	4.0/14	0.5869	0.3184	12.00	Orange	y=0.4054 - 0.1099x
	Value +	7.5R	4.5/14	0.5775	0.3320	15.57		
	Value -	7.5R	3.5/14	0.6226	0.3141	9.00		
	Chroma +	7.5R	4.0/16	0.6260	0.3192	12.00		
	Chroma -	7.5R	4.0/12	0.5603	0.3321	12.00		
Safety Orange	Standard	5.0YR	6.0/15	0.5510	0.4214	30.05	Red	y=0.2678 + 0.2545x
	Hue +	6.25YR	6.0/15	0.5452	0.4329	30.05	White	x=0.5331
	Hue -	3.75YR	6.0/15	0.5551	0.4091	30.05	Yellow	y=0.3722x + 0.2301
	Value +	5.0YR	6.0/15	0.5427	0.4206	36.20		
	Value -	5.0YR	6.5/15	0.5606	0.4218	24.58		
	Chroma +	5.0YR	5.5/15	0.5597	0.4239	30.05		
	Chroma -	5.0YR	6.0/13	0.5311	0.4154	30.05		
Safety Brown	Standard	5.0YR	2.75/5	0.4766	0.3816	5.52	Red	y=0.2317 + 0.2729x
	Hue +	7.0YR	2.75/5	0.4762	0.3981	5.52	White	x=0.4450
	Hue -	2.5YR	2.75/5	0.4728	0.3607	5.52	Yellow	y=0.1636 + 0.4926x
	Value +	5.0YR	3.25/5	0.4608	0.3801	7.71		
	Value -	5.0YR	2.25/5	0.4955	0.3826	3.82		
	Chroma +	5.0YR	2.75/6	0.5081	0.3912	5.52		
	Chroma -	5.0YR	2.75/4	0.4450	0.3720	5.52		
Safety Yellow	Standard	5.0Y	8.0/12	0.4562	0.4788	59.10	Orange	y=0.9837x + 0.0112
	Hue +	6.5Y	8.0/12	0.4498	0.4865	59.10	White	y=1.1007 - 1.4631x
	Hue -	3.5Y	8.0/12	0.4632	0.4669	59.10	Green	y=1.2183x - 0.0615
	Value +	5.0Y	8.5/12	0.4508	0.4754	68.40		
	Value -	5.0Y	7.5/12	0.4620	0.4823	50.68		
	Chroma +	5.0Y	8.0/14	0.4699	0.4920	59.10		
	Chroma -	5.0Y	8.0/10	0.4376	0.4601	59.10		

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Table 1(continued)

Specifications of the safety colors for CIE illuminant C (representative of overcast north sky daylight) and the CIE 1931, 2° Standard Observer

Color Names	Standard and Tolerances	Munsell Notation Specifications		Equivalent CIE Data Specifications			Boundary Equations on the CIE 1931 Chromaticity Diagram	
		Hue	Value/Chroma	x	y	Y%		
Safety Green	Standard	7.5G	4.0/9	0.2111	0.4121	12.00	Yellow	y=0.7598 - 1.4306x
	Hue +	0.5BG	4.0/9	0.1974	0.3809	12.00	White	y=1.8471x - 0.0417
	Hue -	5.0G	4.0/9	0.2237	0.4399	12.00	Blue	y=0.4935 - 0.5714x
	Value +	7.5G	4.5/9	0.2204	0.4060	15.57		
	Value -	7.5G	3.5/9	0.2027	0.4163	9.00		
	Chroma +	7.5G	4.0/11	0.1848	0.4319	12.00		
	Chroma -	7.5G	4.0/7	0.2350	0.3922	12.00		
	Chroma - - ††	7.5G	4.0/6	0.2467	0.3822	12.00		
Safety Blue	Standard	2.5PB	3.5/10	0.1691	0.1744	9.00	Green	y=0.8725x + 0.0457
	Hue +	4.5PB	3.5/10	0.1796	0.1711	9.00	White	y=0.2852 - 0.4696x
	Hue -	10.0B	3.5/10	0.1557	0.1815	9.00	Purple	y=1.1134x - 0.0290
	Value +	2.5PB	4.0/10	0.1805	0.1888	12.00		
	Value -	2.5PB	3.0/10	0.1576	0.1600	6.55		
	Chroma +	2.5PB	3.5/12	0.1516	0.1547	9.00		
	Chroma -	2.5PB	3.5/8	0.1888	0.1964	9.00		
Safety Purple	Standard	10.0P	4.5/10	0.3307	0.2245	15.57	Blue	y=30.8485x - 9.2485
	Hue +	2.5RP	4.5/10	0.3584	0.2377	15.57	White	y=0.4644x + 0.0869
	Hue -	7.5P	4.5/10	0.3068	0.2145	15.57	Red	y=0.8209 - 1.6273x
	Value +	10.0P	5.0/10	0.3308	0.2328	19.77		
	Value -	10.0P	4.0/10	0.3306	0.2162	12.00		
	Chroma +	10.0P	4.5/12	0.3333	0.2100	15.57		
	Chroma -	10.0P	4.5/8	0.3280	0.2391	15.57		
	Chroma - - ††	10.0P	4.5/6.5	0.3254	0.2519	15.57		
Safety White	Standard		N 9.0/	0.3101	0.3163	78.00	See Figure 2	
	Hue +			-	-			
	Hue -			-	-			
	Value +		N 9.5/	-	-	90.00		
	Value -		N 8.75/	-	-	73.40		
	Chroma +		/1.0(5R-5Y)	-	-			
			/0.5(5G-5P)	-	-			
	Chroma -		/0.0		-			

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Table 1(continued)

Specifications of the safety colors for CIE illuminant C (representative of overcast north sky daylight) and the CIE 1931, 2° Standard Observer

Color Names	Standard and Tolerances	Munsell Notation Specifications		Equivalent CIE Data Specifications			Boundary Equations on the CIE 1931 Chromaticity Diagram
		Hue	Value/Chroma	x	y	Y%	
Safety Gray	Standard		N 5.0/	0.3101	0.3163	19.80	See Figure 2
	Hue +			-	-		
	Hue -			-	-		
	Value +		N 5.5/		-	24.60	
	Value -		N 4.5/		-	15.60	
	Chroma +		/0.5		-		
	Chroma		/0.0				
Safety Black	Standard		N1.5/	0.3101	0.3163	2.02	See Figure 2
	Hue +			-	-		
	Hue -			-	-		
	Value ++		N 2.5/**		-	4.61	
	Value +		N 2.0/		-	3.13	
	Value -		N 0.5/		-	0.58	
	Chroma +		/0.5				
	Chroma		/0.0				

NOTES:

* Safety red, Safety Orange, Safety Yellow, Safety Green, Safety Blue, Safety Purple, and Safety Brown colors may be stronger (more saturated, than the C+ (plus) color as long as they comply with the hue and value tolerances. White Safety Colors may be lighter (higher value) than the V+ (plus) color, and Black Safety Colors may be darker (lower value) than the V- (minus) color as long as each complies with the applicable hue and chroma tolerances.

† The Y values in Table 1 apply to the colors of glossy or matte reflecting samples and may not be appropriate for the colors of fluorescent or retroreflective samples.

** V++ for matte Safety Blacks only. For the purpose of this standard, Matte is defined as having a 60° gloss of less than 30 (ASTM D 523).

†† Porcelain enamel only.

Table 2

Equations of the boundary lines for the specified chromaticity regions of fluorescent safety colors illuminated by a source equivalent to CIE D_{65}, measured using 15). 0° geometry, and expressed in the CIE 1931 system.

Color	Boundary	Equation of the Boundary Line
Restricted Red	Purple White Orange	y = 0.345 - 0.051x y = 0.910 - x y = 0.314 + 0.047x
Restricted Orange	Red White Yellow	y = 0.265 + 0.205x y = 0.910 - x y = 0.207 + 0.390x
Unrestricted Red-Orange	Purple White Yellow	y + 0.345 - 0.051x y = 0.910 - x y = 0.207 + 0.390x
Restricted Yellow	Orange White Green	y = 0.108 + 0.707 y = 0.910 - x y = 1.35x - 0.093
Unrestricted Yellow	Orange White Green	y = 0.108 + 0.707x y = 0.697 - 0.547x y = 1.667x - 0.100
Green	Yellow White Blue	x = 0.313 y = 0.243 + 0.670x y = 0.493 - 0.524x

Table 3

Chromaticity coordinates of the corners of the recommended regions of fluorescent safety colors illuminated by a source equivalent to CIE D_{65}, measured using 15). 0° geometry, and expressed in the CIE 1931 system.

Color	1		2		3		4	
	x	y	x	y	x	y	x	y
Restricted Red	0.690	0.310	0.595	0.315	0.569	0.341	0.655	0.345
Restricted Orange	0.610	0.390	0.535	0.375	0.506	0.404	0.570	0.429
Unrestricted Red-Orange	0.690	0.310	0.595	0.315	0.506	0.404	0.570	0.429
Restricted Yellow	0.522	0.477	0.470	0.440	0.427	0.483	0.465	0.534
Unrestricted Yellow	0.522	0.477	0.470	0.440	0.360	0.500	0.412	0.587
Green	0.313	0.682	0.313	0.453	0.209	0.383	0.013	0.486

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Table 4

Minimum permissible values of luminance factors and/or spectral (total) radiance factors, within the indicated wavelength range, of fluorescent safety colors illuminated by a source equivalent to CIE D_{65} and measured using 45°/0° geometry.

Color	Minimum luminance factor Y %	Minimum spectral radiance factor %	Wavelength range (nm)
Restricted Red	25	--	--
Restricted Orange	40	--	--
Unrestricted Red-Orange	--	100	600-630
Restricted Yellow	60	--	--
Unrestricted Yellow	--	100	520-540
Green	25	30	510-530

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

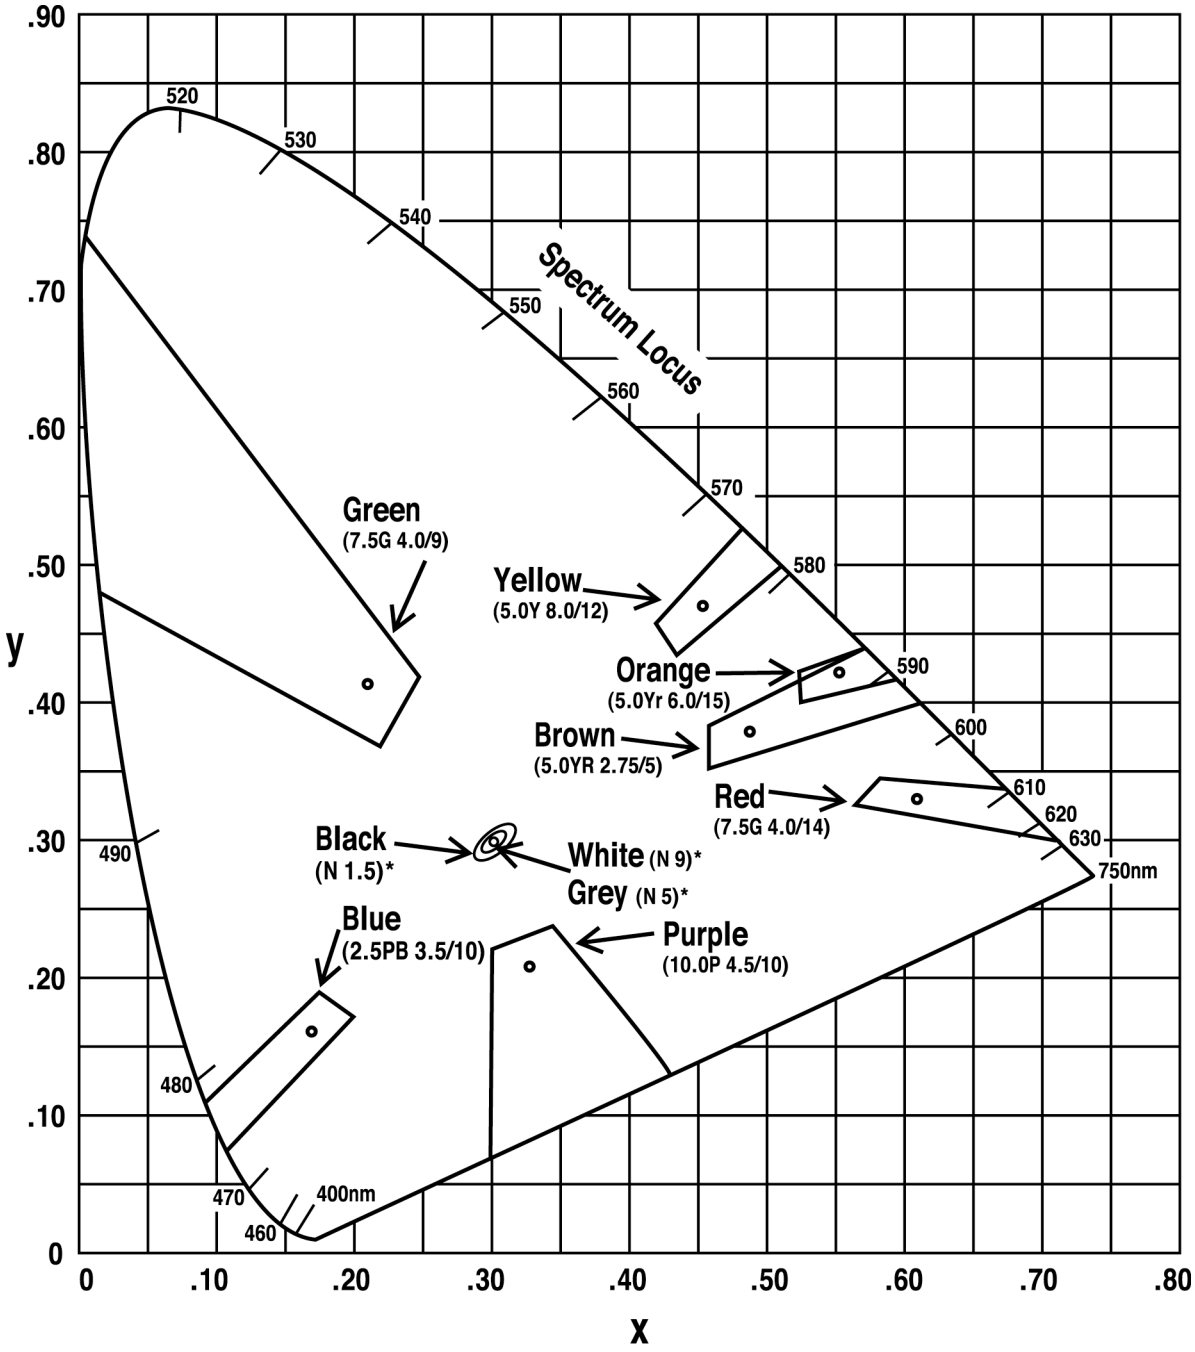

Note: The small circles inside each color limit area identifies the centroid for each color.

***See Figure 2 for an enlarged view of the white, grey and black limit areas**

Figure 1 - CIE 1931 chromaticity diagram showing the areas representing the ANSI Z535.1 Safety Color Code

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

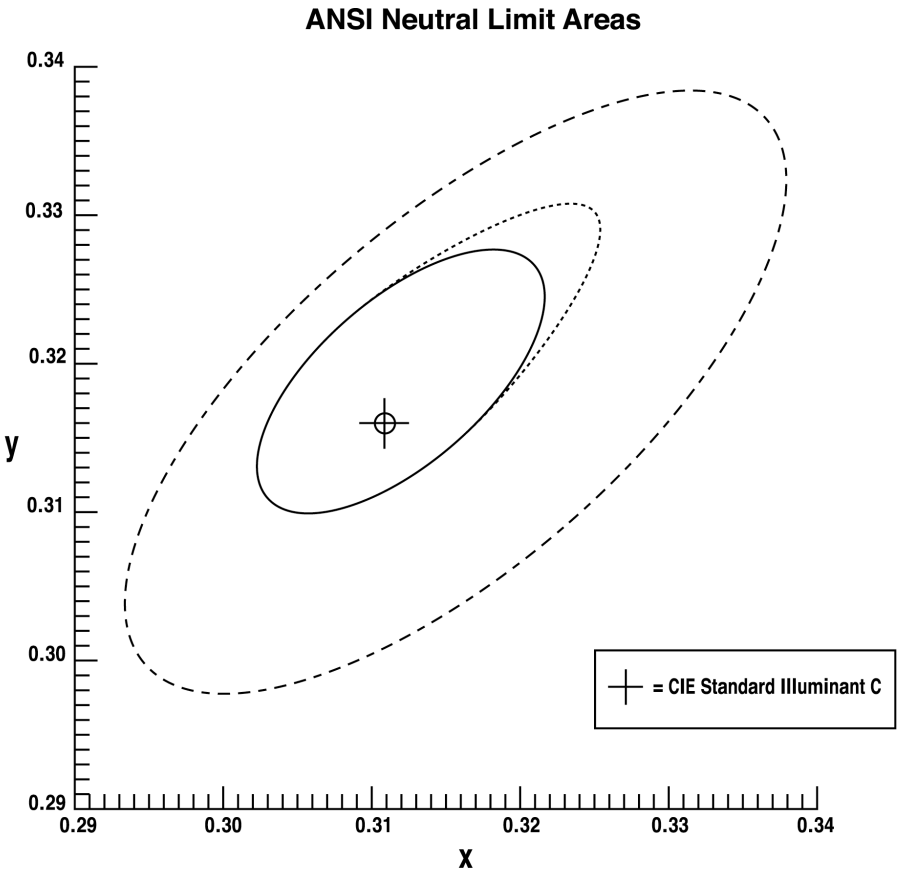

Legend	Color	Munsell Value			Munsell Chroma Tolerance
----------	White	N 9	/0.5	to /1.0	
————	Grey	N 5	/0.5		
- - - - - -	Black	N 1.5		/0.5	

Figure 2 - Enlarged View of the CIE 1931 chromaticity diagram showing the areas representing the ANSI Z535.1 Safety Color Code for white, grey and black

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

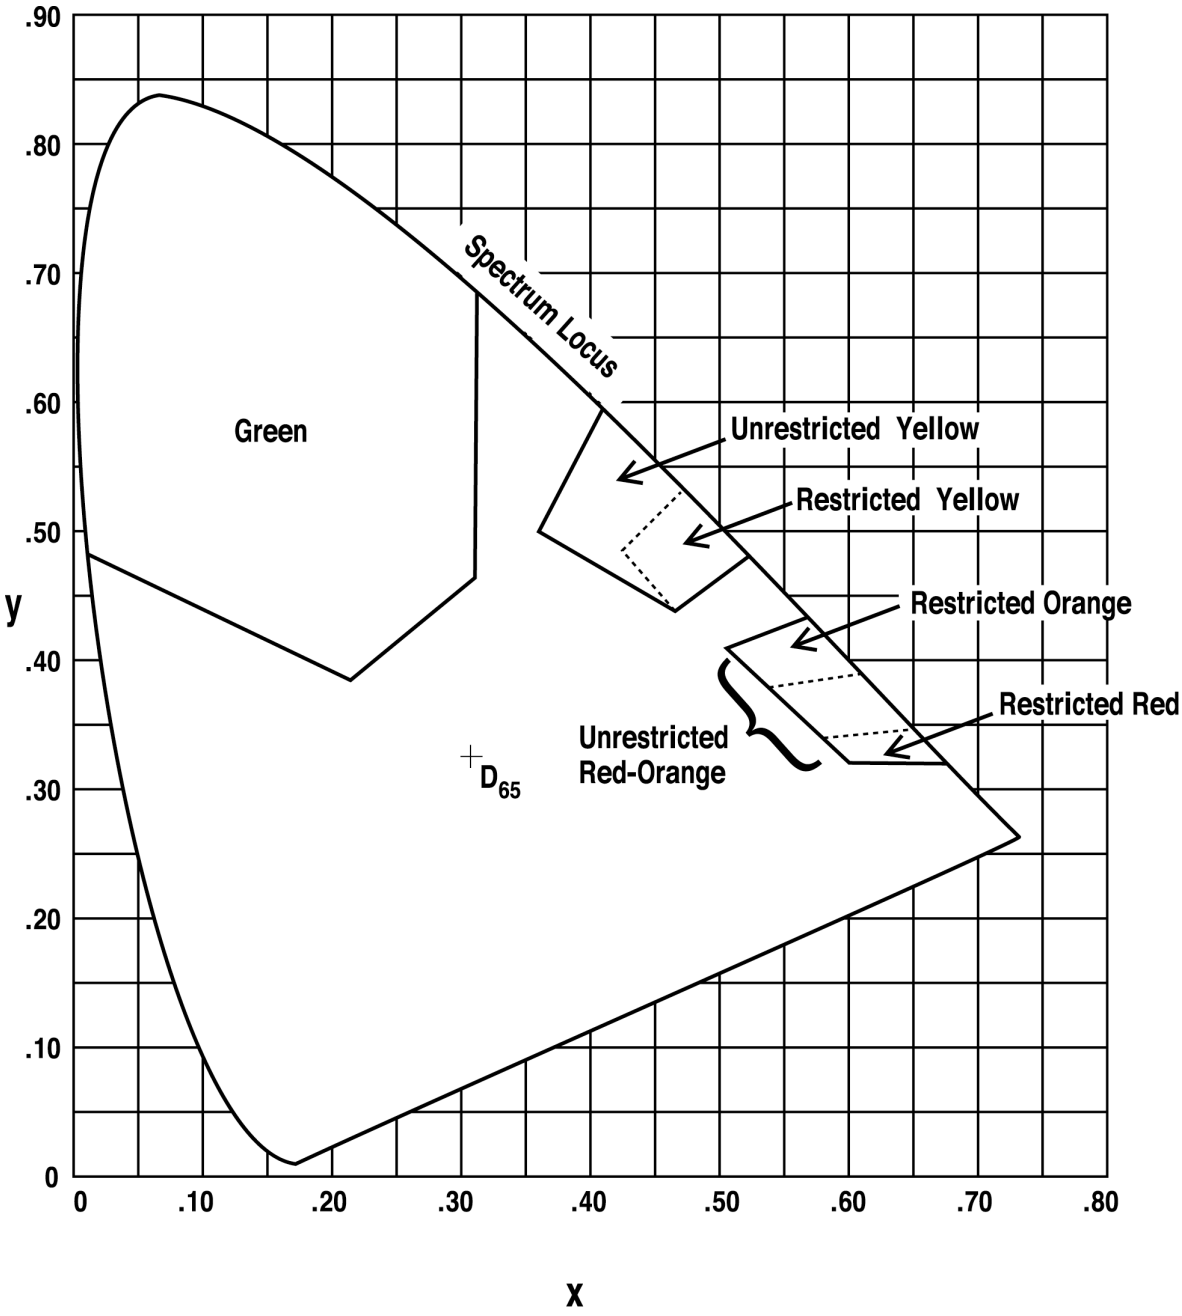

Figure 3 - CIE 1931 chromaticity diagram showing the areas representing fluorescent safety color illuminated by a source equivalent to CIE D_{65} and measured using 45°/0° geometry

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Annex A

(informative)

This annex is not an official part of the body of this standard.

Understanding and Using the Color Specifications Set Forth in the ANSI Z535.1 Safety Color Code

This annex elaborates on the color specification information in Section 7 of this standard and is intended to be helpful to persons not familiar with basic color technology.

In science and industry, colors of products are specified in colorimetric terms. In each case it is necessary to specify a tolerance range for a color since it is seldom possible to exactly match a specified color. In color-intensive industries such as paint, textiles, plastics, ceramics and printing, color measuring instruments are ordinarily used to determine if a product's color is within a specification. These instruments are expensive and require a trained operator, though when used frequently, their expense is justified.

Many industries only occasionally need to comply with a color specification and in such cases the expense of an instrument and a trained operator is difficult to justify. For such applications color tolerance charts are often used to display the ideal color and examples of tolerances around it. Color samples are visually compared to such charts to determine compliance with colorimetric specifications. Thus, it is possible to have both instrumental and visual test methods to determine color conformance.

In ANSI Z535.1, Table 1 and Figures 1 and 2 provide specification data. Figure 1 is a CIE xy chromaticity diagram. This diagram is essentially a "color map" upon which are plotted the ideal safety colors and their tolerance regions. Figure 2 is an enlarged view of the central portion of Figure 1 that makes it easier to plot the neutral colors (white, gray, and black). In Figure 1, the horseshoe-shaped perimeter is called the spectrum locus and along its outer boundary lie the most vivid versions of each safety color. Wavelength numbers appear just outside this locus. It is not currently possible to produce opaque colors vivid enough to fall on the spectrum locus, though we can achieve these positions with colored lights.

Within each permissible color region in Figure 1 is a circle denoting the position of the ideal, or Standard Color. These are the colors defined in Table 1 of this standard. For each color region there is a range of hue defined by the lines extending to the spectrum locus, plus a line connecting these two toward the center of the diagram which represents the boundary of minimum saturation. You can duplicate these plots by solving the linear equations in Table 1 (Boundary Equations) and plotting the resulting xy data pairs on graph paper.

To instrumentally test a colored sample you need to measure it on a spectrophotometer and then compute the data for CIE Illuminant C and the CIE 1931 2 Standard Observer. These computations are made automatically once the computer menu is programmed accordingly. The instrumental result in terms of Yxy data are recorded. Plot x and y on the xy diagram, and if this data point is within the boundary, the chromaticity is satisfactory. The capital Y value is compared with the range of Y values in Table 1 under "Specification" and "CIE Data." If the color is neutral (white, gray, or black) use Figure 2 for plotting the xy data.

The visual test method differs from the instrument one because people see colors differently from how instruments measure colors. However both methods give related results, though the instrumental results are more accurate. The actual color tolerances for each Safety Color are quite liberal so the inaccuracy inherent in the visual test method is seldom a problem.

Figure A1 is an example showing how the color specification test methods are used in practice. This illustration is an enlargement of the xy chromaticity diagram region for Safety Yellow – the solid square corner points are the same as the corner points for this color in Figure 1. For convenience the spectrum locus, the red and green boundary lines, and the minimum saturation boundary are also identified.

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

The solid circles identify points along the red, green, and low saturation boundaries and there is a “HIGH CHROMA” color which is a typical color more vivid than the ideal or standard color. Examples of high chroma (saturation) colors appear on color tolerance charts for orientation purposes.

Data points shown as solid circles in Figure A1 represent colors, which appear on a color tolerance chart for Safety Yellow. These data points are also found in Table 1 and are identified by their xy data, their Munsell notations, and their standard or tolerance designation.

The RED LIMIT H- color on Figure A1 is shown in Table 1 as Safety Yellow Hue- and has a Munsell notation of 6.5Y 8.0/12. Visually it is clearly redder than the Standard Safety Yellow Color (5.0Y 8.0/12). All colors falling along the Red Boundary will have the same visual hue as this Red Limit, permitting the observer to determine if a color sample is too red or visually between the Standard Safety Yellow Color and the Red hue limit. To compare a sample color with a color tolerance chart, the sample is placed under the cutout portion of the chart and viewed in daylight. A visual determination can then be made to see if the sample color falls within the chart’s visual color tolerances.

When a Yellow color sample is compared with the Standard Safety color on a Yellow color tolerance chart, it will either be seen as a good match or as redder or greener. If it is redder or greener than the standard color, the sample is then compared to the appropriate tolerance color to see if it falls within the permissible range of color. The same is true with respect to the saturation minimum (C-) and to the light and dark limit colors. If the sample color is visually between each pair or limits shown in the color tolerance chart, and more saturated than the C- color shown on the chart, the sample complies with the specification.

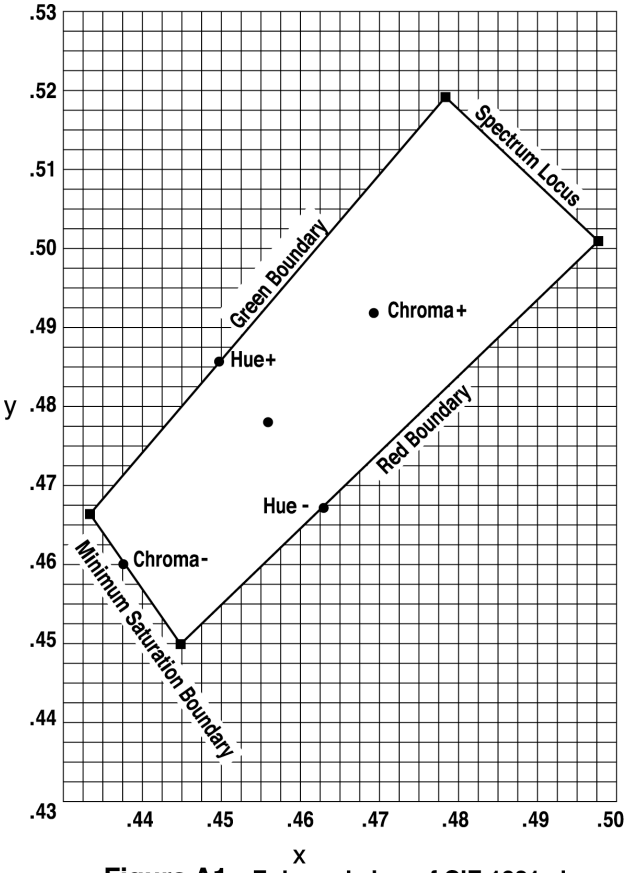

This diagram shows the relationship between the permissible color region for Safety Yellow as shown in Figure 1 tolerance limits for Safety Yellow described in the CIE data found in Table 1.

■ = Corner Points of Acceptable Color Tolerance Region

● = Color Tolerance Chart Colors

Figure A1 - Enlarged view of CIE 1931 chromaticity diagram showing the areas representing the Color Tolerance Area for ANSI Z535.1 Safety Yellow

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

Revisions 2006

The ANSI Accredited Standards Committee Z535 plans to issue the next revisions of the Z535 Standards (.1 through .5) in December 2006. In order to meet that deadline, the committee developed the following tentative timetable:

All proposed changes are due:	June 30, 2004
Revisions will be finalized for letter balloting:	April 11, 2005
Letter balloting will be completed by:	July 18, 2005
Public reviews will be completed by:	March 1, 2006
Drafts will be ready to submit to the publisher:	May 21, 2006
Published:	December 15, 2006

All proposed changes must be submitted by June 30, 2004. Any proposals received after that date will be deferred to subsequent revisions. In order to facilitate the next revision, proposed changes must be submitted on a form for that specific purpose, which is on the back of this page. Please send this form to:

Secretary, ANSI Committee Z535

National Electrical Manufacturers Association

1300 North 17th Street, Suite 1847

Rosslyn, VA 22209

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale

ANSI Accredited Standards Committee Z535
On Safety Signs and Colors

F O R M F O R P R O P O S A L S

Return to: Secretary, ANSI ASC Z535
National Electrical Manufacturers Association
1300 North 17th Street, Suite 1847
Rosslyn, VA 22209

Date_____ Name_____ Telephone #_____

Address_____

Representing_____
(Please indicate organization or self.)

1. a. Standard Title_____

   b. Section/Paragraph_____

2. Proposal recommends (check one): New Text
   Revised Text
   Deleted Text

3. Proposal (Include the proposed new or revised text, or identify the words to be deleted.)

4. Statement of the Problem or Substantiation for the Proposal

5. Check one. This proposal is original material.
   This proposal is not original material; its source is as follows:

   _____

   _____

(This original material is the submitter's own idea based upon his/her own experience, thought, or research, and to the best of his/her knowledge, is not copied from another source.)

I agree to give NEMA all and full rights, including rights of copyright, in this proposal, and I understand that I acquire no rights in any standards publication in which this proposal in this or another similar or analogous form is used.

_____
Signature

Please do not write in the space below.

Date Received	Log #

Copyright National Electrical Manufacturers Association
Provided by IHS under license with NEMA
No reproduction or networking permitted without license from IHS
Not for Resale