INTERNATIONAL STANDARD ISO/IEC 15444-12:2008
TECHNICAL CORRIGENDUM 1

Published 2008-12-01

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

Information technology — JPEG 2000 image coding system —

Part 12:
ISO base media file format

TECHNICAL CORRIGENDUM 1

Technologies de l'information — Système de codage d'images JPEG 2000 —

Partie 12: Format ISO de base pour les fichiers médias

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to ISO/IEC 15444-12 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

Pages 11 and 12, in Table 1, delete the following rows (NOTE ipmc has two rows to be deleted):

ipmc	8.12.4	*IPMP Control Box*
ipmc	8.12.4	*IPMP Control Box*
imif	8.12.3	*IPMP Information box*

Page 17, in 8.2.2.3, replace:

`duration` is an integer that declares length of the presentation (in the indicated timescale). This property is derived from the presentation's tracks: the value of this field corresponds to the duration of the longest track in the presentation.

ICS 35.040 **Ref. No. ISO/IEC 15444-12:2008/Cor.1:2008(E)**

© ISO/IEC 2008 – All rights reserved

Published in Switzerland

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS Not for Resale

with:

`duration` is an integer that declares length of the presentation (in the indicated timescale). This property is derived from the presentation's tracks: the value of this field corresponds to the duration of the longest track in the presentation. If the duration cannot be determined then duration is set to all 1s.

Page 19, in 8.3.2.3, replace:

`duration` is an integer that indicates the duration of this track (in the timescale indicated in the Movie Header Box). The value of this field is equal to the sum of the durations of all of the track's edits. If there is no edit list, then the duration is the sum of the sample durations, converted into the timescale in the Movie Header Box. If the duration of this track cannot be determined then duration is set to all 1s (32-bit maxint).

with:

`duration` is an integer that indicates the duration of this track (in the timescale indicated in the Movie Header Box). The value of this field is equal to the sum of the durations of all of the track's edits. If there is no edit list, then the duration is the sum of the sample durations, converted into the timescale in the Movie Header Box. If the duration of this track cannot be determined then duration is set to all 1s.

Page 21, in 8.4.2.3, replace:

`duration` is an integer that declares the duration of this media (in the scale of the timescale).

with:

`duration` is an integer that declares the duration of this media (in the scale of the timescale). If the duration cannot be determined then duration is set to all 1s.

Page 30, 8.5.4, replace the contents of this subclause with the following text:

(empty subclause)

Page 65, in 8.12.1.1, replace:

a) MPEG-4 systems with IPMP: no other boxes, when IPMP descriptors in MPEG-4 systems streams are used;

b) Standalone IPMP: an `IPMPInfoBox`, when IPMP descriptors outside MPEG-4 systems are used;

c) Scheme signalling: a `SchemeTypeBox` and `SchemeInformationBox`, when these are used (either both must occur, or neither).

with:

a) MPEG-4 systems with IPMP: no other boxes, when IPMP descriptors in MPEG-4 systems streams are used;

b) Scheme signalling: a `SchemeTypeBox` and `SchemeInformationBox`, when these are used (either both must occur, or neither).

© ISO/IEC 2008 – All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Page 65, in 8.12.1.2, delete the code line referring to the IPMPInfoBox as follows:

```
aligned(8) class ProtectionSchemeInfoBox(fmt) extends Box('sinf') {
   OriginalFormatBox(fmt)  original_format;

   SchemeTypeBox           scheme_type_box;          // optional
   SchemeInformationBox    info;               // optional
}
```

Page 65, 8.12.3, replace the contents of this subclause with the following text:

(empty subclause).

Page 66, 8.12.4, replace the contents of this subclause with the following text:

(empty subclause).

Page 69, in 8.13.3.3, replace:

`block_size` indicates the size of a block (in bytes). A `block_size` that is not a multiple of the `encoding_symbol_length` symbol size indicates that the last source symbol includes padding that is not stored in the item.

with:

`block_size` indicates the size of a block (in bytes). A `block_size` that is not a multiple of the `encoding_symbol_length` symbol size indicates with Compact No-Code FEC that the last source symbols includes padding that is not stored in the item. With MBMS FEC (3GPP TS 26.346) the padding may extend across multiple symbols but the size of padding should never be more than `encoding_symbol_length`.

--`,,```,,,,````-`-`,,`,,`,`,,`---

© ISO/IEC 2008 - All rights reserved

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Pages 79 and 80, in 9.2.2, replace:

A schematic picture of a file containing three alternative hint tracks with different FEC overhead for a source file is provided in Figure 4.

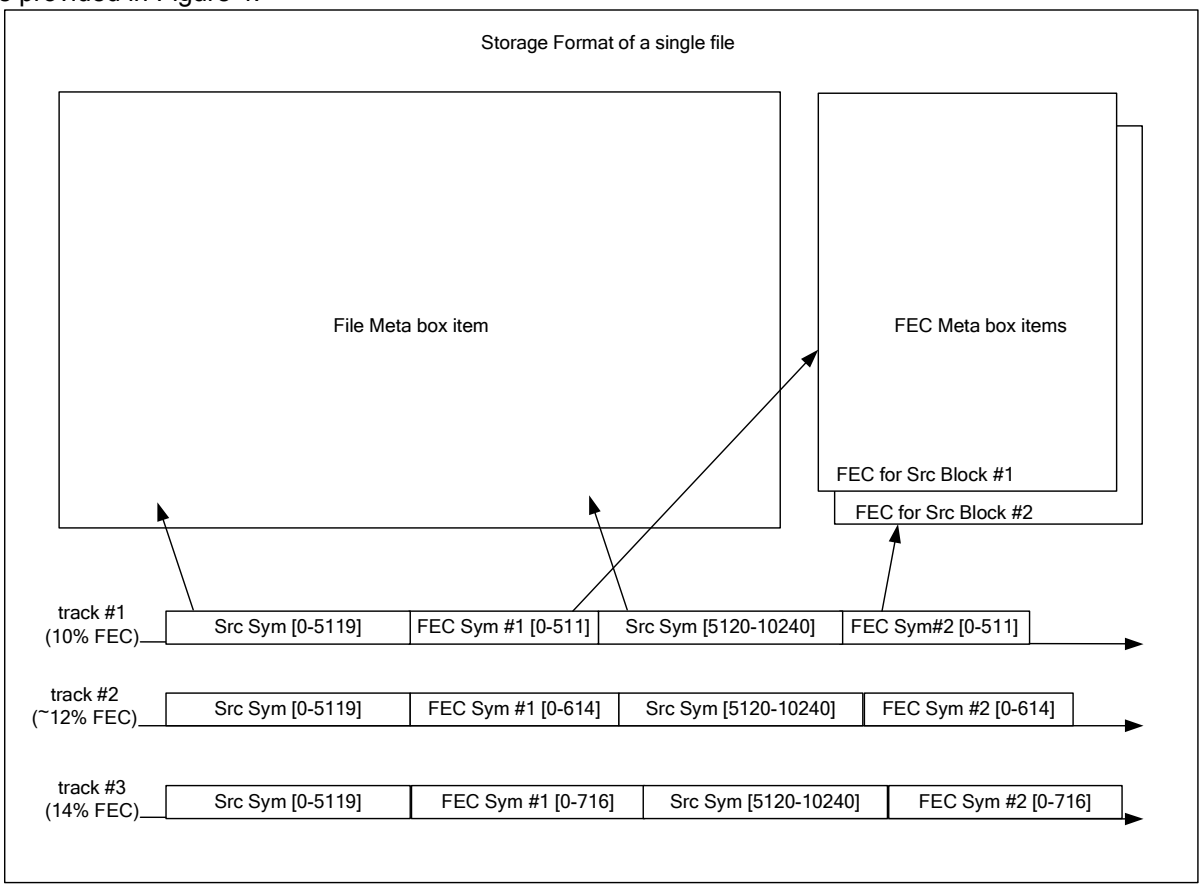


Figure 4 — Different FEC overheads of a source file provided by alternative hint tracks.

The source file in the above Figure is partitioned into 2 source blocks containing symbols of a fixed size. FEC redundancy symbols are calculated for both source blocks and stored in separate meta box items. As the hint tracks reference the same items in the file there is no duplication of information. The original source symbols and FEC reservoirs can also be used by repair servers that don't use hint tracks.

with:

A schematic picture of a file containing three alternative hint tracks with different FEC overhead for a source file is provided in Figure 4. In this example, each source block consists of only one sub-block.

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale
© ISO/IEC 2008 – All rights reserved

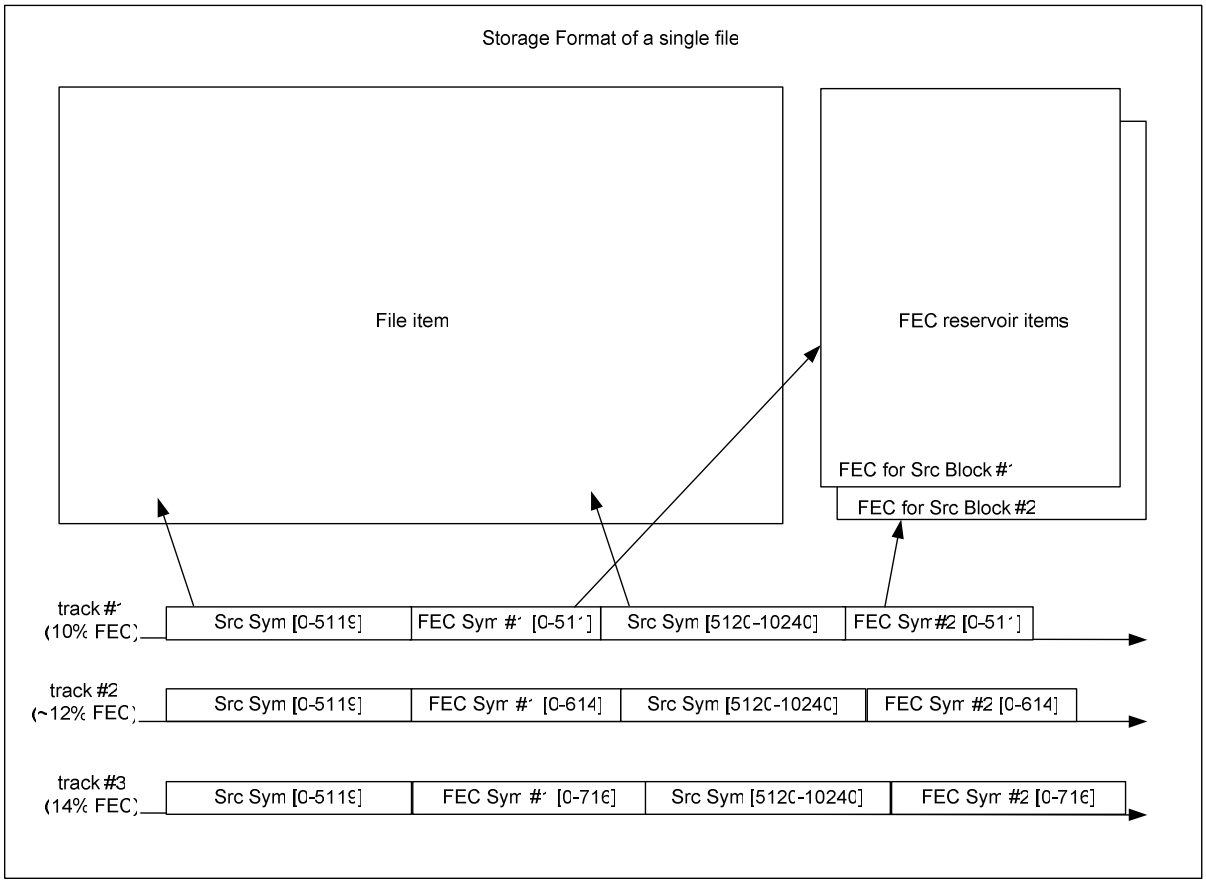


Figure 4 — Different FEC overheads of a source file provided by alternative hint tracks.

The source file in the above figure is partitioned into 2 source blocks containing symbols of a fixed size. FEC redundancy symbols are calculated for both source blocks and stored as FEC reservoir items. As the hint tracks reference the same items in the file there is no duplication of information. The original source symbols and FEC reservoirs can also be used by repair servers that don't use hint tracks.

Pages 80 and 81, in 9.2.3.3, replace:

`partition_entry_ID` indicates the partition entry in the FD item information box. A zero value indicates that no partition entry is associated with this sample entry, e.g., for FDT.

`FEC_overhead` is a fixed 8.8 value indicating the percentage protection overhead used by the hint sample(s). The intention of providing this value is to provide characteristics to help a server select a session group (and corresponding FD hint tracks).

with:

`partition_entry_ID` indicates the partition entry in the FD item information box. A zero value indicates that no partition entry is associated with this sample entry, e.g., for FDT. If the corresponding FD hint track contains only overhead data this value should indicate the partition entry whose overhead data is in question.

`FEC_overhead` is a fixed 8.8 value indicating the percentage protection overhead used by the hint sample(s). The intention of providing this value is to provide characteristics to help a server select a session group (and corresponding FD hint tracks). If the corresponding FD hint track contains only overhead data this value should indicate the protection overhead achieved by using all FD hint tracks in a session group up to the FD hint track in question.

© ISO/IEC 2008 - All rights reserved
Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS
Not for Resale

Page 104, in Annex E.4, delete the following rows from the table (NOTE ipmc has two rows to be deleted):

	ipmc					*IPMP Control Box*
	ipmc					*IPMP Control Box*
			imif			*IPMP Information box*

Page 106, in Annex F, delete the following row:

8.41 8.5.4 Sample Scale Box

--`,,```,,,,````-`-`,,`,,`,`,,`---

© ISO/IEC 2008 – All rights reserved

Copyright International Organization for Standardization
Provided by IHS under license with ISO
No reproduction or networking permitted without license from IHS

Not for Resale